


Mounted Ball Bearing Units

PowerDrive LLC

MECHANICAL P.T. COMPONENTS

www.powerdrive.com

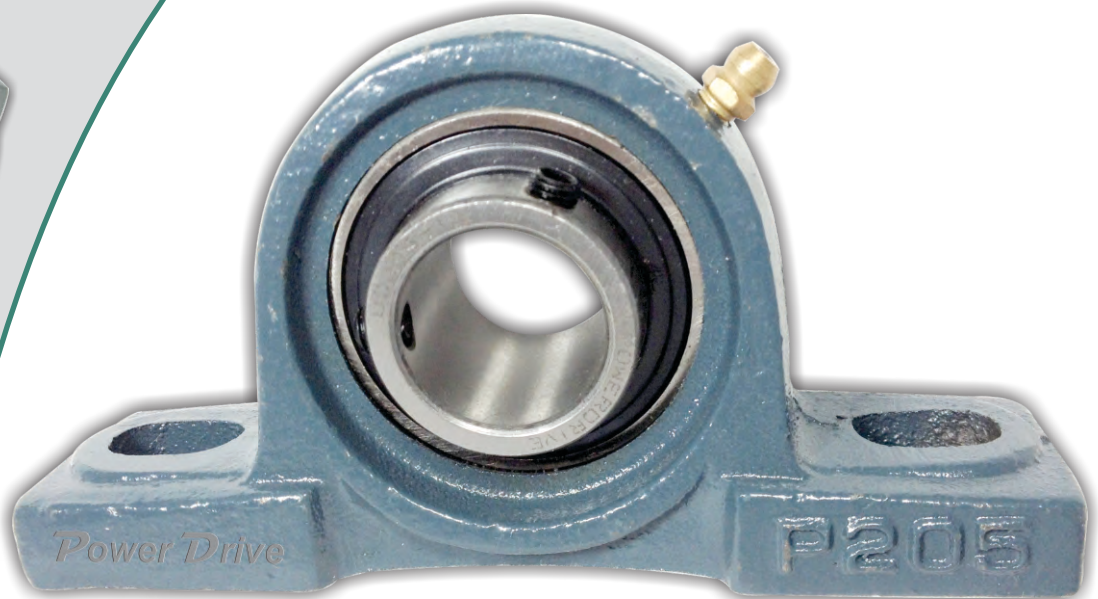

Toll Free : 877-564-1600

info@powerdrive.com

INDEX

Mounted Ball Bearing Units and Insert Bearings (Inch / mm)

Solid Base Pillow Blocks - Setscrew Locking

Series	Bearing Inner Ring	Shaft Height	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCP	Wide	High	Standard	1/2 - 3	12 - 75	1
UCAK	Wide	Low	Standard	1/2 - 3	12 - 75	2
UCPX	Wide	High	Medium	7/8 - 3	-	3
UCPA	Wide	High	Standard	1/2 - 2	-	4
SBP	Narrow	High	Standard	1/2 - 1 1/2	-	5
SBAK	Narrow	Low	Standard	3/4 - 1 1/2	-	5
SBLP	Narrow	High	Light	1/2 - 1 1/2	-	6
SBPSD	Narrow	High	Light / Ductile Iron	1/2 - 1 7/16	-	7

Solid Base Pillow Blocks - Eccentric Locking Collar

Series	Bearing Inner Ring	Shaft Height	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCP	Wide	High	Standard	5/8 - 3	20 - 60	8
HCAK	Wide	Low	Standard	3/4 - 3	20 - 60	9
SAP	Narrow	High	Standard	1/2 - 1 1/2	-	10
SAAK	Narrow	Low	Light	3/4 - 1 1/2	-	10
SALP	Narrow	High	Light	1/2 - 1 1/2	-	11
SAPSD	Narrow	High	Light / Ductile Iron	1/2 - 1 7/16	-	12

2 - Bolt Flange Blocks - Setscrew Locking

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCFL	Wide	Oval	Standard	1/2 - 2 1/2	12 - 65	13
UCFT	Wide	Oval	Standard	1/2 - 2 3/16	12 - 55	14
SBFT	Narrow	Oval	Standard	1/2 - 2 7/16	-	15
SBFL	Narrow	Oval	Light	1/2 - 1 1/2	-	16
SBFTN	Narrow	Oval	Light	1/2 - 1 3/4	-	17
SBLF	Narrow	Oval	Light	1/2 - 1 7/16	-	18
SBFTD	Narrow	Oval / Square Holes	Light / Ductile Iron	1/2 - 1 7/16	-	19

2 - Bolt Flange Blocks - Eccentric Locking Collar

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCFT	Wide	Oval	Standard	1/2 - 2 7/16	20 - 60	20
SAFT	Narrow	Oval	Standard	1/2 - 2 7/16	-	21
SAFL	Narrow	Oval	Light	1/2 - 1 1/2	-	22
SAFTN	Narrow	Oval	Light	1/2 - 1 3/4	-	23
SALF	Narrow	Oval	Light	1/2 - 1 7/16	-	24
SAFTD	Narrow	Oval / Square Holes	Light / Ductile Iron	1/2 - 1 7/16	-	25

4 - Bolt Flange Blocks - Setscrew Locking

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCF	Wide	Square	Standard	1/2 - 3	12 - 75	26
UCFS	Wide	Square	Standard	1/2 - 2 7/16	12 - 60	27
UCFX	Wide	Square	Medium	7/8 - 3	-	28
SBF	Narrow	Square	Standard	1/2 - 1 1/2	-	29
SBFS	Narrow	Square	Light	3/4 - 1 1/2	-	30
SBFN	Narrow	Square	Light	1/2 - 1 3/4	-	31
UCFC	Wide	Round Cartridge	Standard	1/2 - 2 1/2	-	32

4 - Bolt Flange Blocks - Eccentric Locking Collar

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCFS	Wide	Square	Standard	3/4 - 2 7/16	20- 60	33
SAF	Narrow	Square	Standard	1/2 - 1 1/2	-	34
SAFS	Narrow	Square	Standard	3/4 - 1 1/2	-	35
SAFN	Narrow	Square	Light	1/2 - 1 3/4	-	36

3 - Bolt Flange Blocks - Ductile Iron Housing

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
SBFCT	Narrow	Set Screw	Light	1/2 - 1 7/16	-	37
SAFCT	Narrow	Eccentric Collar	Light	1/2 - 1 7/16	-	38

Screw Conveyor Hanger Unit

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCSH	Wide	Set Screw	Threaded Base	1/2 - 2	-	39

Take- Up Units - Wide Slot

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCST	Wide	Set Screw	Standard	1/2 - 2 1/2	12 - 65	40
HCST	Wide	Eccentric Collar	Standard	1/2 - 2 7/16	20 - 60	41

Rubber Mounted - Cylindrical Cartridge

Series	Bearing Inner Ring	Locking type	Housing	Shaft Diameter		Page
				Inch	MM	
RCSMS	Narrow	Set Screw	Rubber Grommet	1/2 - 1	-	42
RCSM	Narrow	Eccentric Collar	Rubber Grommet	1/2 - 1	-	42

Rubber Mounted - Spherical Cartridge

Series	Bearing Inner Ring	Locking type	Housing	Shaft Diameter		Page
				Inch	MM	
SBR	Narrow	Set Screw	Rubber Grommet	1/2 - 1 1/4	-	43
SAR	Narrow	Eccentric Collar	Rubber Grommet	1/2 - 1 1/4	-	43

PowerDrive LLC
MECHANICAL P.T. COMPONENTS
www.powerdrive.com

Insert Bearings

Series	Bearing Inner Ring	Locking type	Type	Shaft Diameter		Page
				Inch	MM	
SA200	Narrow	Eccentric Collar	Spherical	1/2 - 2 7/16	-	44
CSA200	Narrow	Eccentric Collar	Cylindrical	1/2 - 3	-	44
SB200	Narrow	Set Screw	Spherical	1/2 - 2 7/16	-	45
CSB200	Narrow	Set Screw	Cylindrical	1/2 - 3	-	45
UC200	Wide	Set Screw	Spherical	1/2 - 3	12 - 75	46
HC200	Wide	Eccentric Collar	Spherical	1/2 - 3	20 - 60	47
UCX	Wide	Set Screw	Spherical	7/8 - 3	-	48
SER200	Wide	Set Screw	Cylindrical / Snap Ring	1/2 - 2 7/16	-	49

Inch and Metric Equivalents

Common Fractions of an Inch

INCH		MM
FRACTION	DECIMAL	
1/64	0.01562	0.397
1/32	0.03125	0.794
3/64	0.04688	1.191
1/16	0.06250	1.588
5/64	0.07812	1.984
3/32	0.09375	2.381
7/64	0.10938	2.778
1/8	0.12500	3.175
9/64	0.14062	3.572
5/32	0.15625	3.969
11/64	0.17188	4.366
3/16	0.18750	4.763
13/64	0.20312	5.159
7/32	0.21875	5.556
15/64	0.23438	5.953
1/4	0.25000	6.350
17/64	0.26562	6.747
9/32	0.28125	7.144

INCH		MM
FRACTION	DECIMAL	
19/64	0.29688	7.541
5/16	0.31250	7.938
21/64	0.32812	8.334
11/32	0.34375	8.731
23/64	0.35938	9.128
3/8	0.37500	9.525
25/64	0.39062	9.922
13/32	0.40625	10.319
27/64	0.42188	10.716
7/16	0.43750	11.113
29/64	0.45312	11.509
15/32	0.46875	11.906
31/64	0.48438	12.303
1/2	0.50000	12.700
33/64	0.51562	13.097
17/32	0.53125	13.494
35/64	0.54688	13.891
9/16	0.56250	14.288


Inch and Metric Equivalents

Common Fractions of an Inch

INCH		MM
FRACTION	DECIMAL	
37/64	0.57812	14.684
19/32	0.59375	15.081
39/64	0.60938	15.478
5/8	0.62500	15.875
41/64	0.64062	16.272
21/32	0.65625	16.669
43/64	0.67188	17.066
11/16	0.68750	17.463
45/64	0.70312	17.859
23/32	0.71875	18.256
47/64	0.73438	18.653
3/4	0.75000	19.050
49/64	0.76562	19.447
25/32	0.78125	19.844


INCH		MM
FRACTION	DECIMAL	
51/64	0.79688	20.241
13/16	0.81250	20.638
53/64	0.82812	21.034
27/32	0.84375	21.431
55/64	0.85938	21.828
7/8	0.87500	22.225
57/64	0.89062	22.622
29/32	0.90625	23.019
59/64	0.92188	23.416
15/16	0.93750	23.813
61/64	0.95312	24.209
31/32	0.96875	24.606
63/64	0.98438	25.003
1/1	1.00000	25.400

Standard Shaft Height * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
Solid Base Housing

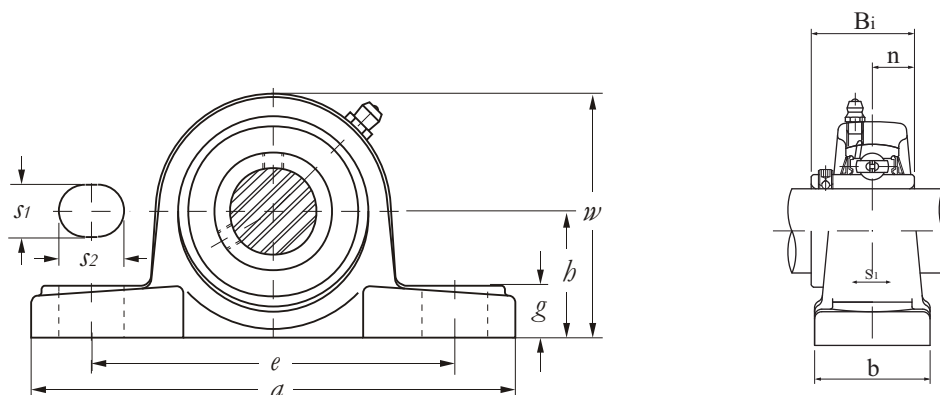


Unit no.	Shaft Dia.		Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	h	a	e	b	S ₂	S ₁	g	w	Bi	n				
UCP201 UCP201-8	1/2	12												UC201 UC201-8		
UCP202 UCP202-10	5/8	15	1 3/16	5	3 3/4	1 1/2	3/4	1/2	15/32	2 3/8	1.2205	0.7205	3/8	UC202 UC202-10	P203	1.72
UCP203 UCP203-11	11/16	17												UC203 UC203-11		
UCP204 UCP204-12	3/4	20	1 5/16	5	3 3/4	1 1/2	3/4	1/2	1/2	2 17/32	1.2205	0.7205	3/8	UC204 UC204-12	P204	1.46
UCP205 UCP205-14	7/8	25	1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	1/2	2 25/32	1.3386	0.5630	3/8	UC205 UC205-14	P205	1.90
UCP205-15 UCP205-16	15/16 1													UC205-15 UC205-16		
UCP206 UCP206-17	1 1/16	30												UC206 UC206-17		
UCP206-18 UCP206-19	1 1/8 1 3/16		1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.5000	0.6250	1/2	UC206-18 UC206-19	P206	3.11
UCP206-20	1 1/4													UC206-20		
UCP207 UCP207-20	1 1/4	35												UC207 UC207-20		
UCP207-21 UCP207-22	1 5/16 1 3/8		1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	1.6890	0.6800	1/2	UC207-21 UC207-22	P207	3.66
UCP207-23	1 7/16													UC207-23		
UCP208 UCP208-24	1 1/2	40	1 15/16	7 1/4	5 13/32	2 1/8	13/16	21/32	21/32	3 27/32	1.9370	0.7460	1/2	UC208 UC208-24	P208	4.67
UCP208-25	1 9/16													UC208-25		
UCP209 UCP209-26	1 5/8	45												UC209 UC209-26		
UCP209-27 UCP209-28	1 11/16 1 3/4		2 1/8	7 15/32	5 3/4	2 1/8	13/16	21/32	21/32	4 3/16	1.9370	0.7480	1/2	UC209-27 UC209-28	P209	5.29
UCP210 UCP210-30	1 7/8	50												UC210 UC210-30		
UCP210-31 UCP210-32	1 15/16 2		2 1/4	8 1/8	6 1/4	2 3/8	7/8	25/32	3/4	4 7/16	2.0315	0.7480	5/8	UC210-31 UC210-32	P210	6.48
UCP211 UCP211-32	2	55												UC211 UC211-32		
UCP211-34 UCP211-35	2 1/8 2 3/16		2 1/2	8 5/8	6 23/32	2 3/8	7/8	25/32	3/4	4 29/32	2.1890	0.8740	5/8	UC211-34 UC211-35	P211	8.07
UCP212 UCP212-36	2 1/4	60												UC212 UC212-36		
UCP212-37 UCP212-38	2 5/16 2 3/8		2 3/4	9 1/2	7 1/4	2 3/4	1	25/32	7/8	5 7/16	2.5630	1.0000	5/8	UC212-37 UC212-38	P212	11.3
UCP212-39	2 7/16													UC212-39		
UCP213 UCP213-40	2 1/2	65												UC213 UC213-40		
UCP213-43	2 11/16		3	10 7/16	8	2 3/4	1 3/16	1	1	5 29/32	2.5630	1.0000	3/4	UC213-43	P213	13.4
UCP214 UCP214-44	2 3/4	70	3 1/8	10 15/32	8 9/32	2 27/32	1 3/16	1	1 3/32	5 5/32	2.9370	1.1890	3/4	UC214 UC214-44	P214	15.2
UCP215 UCP215-46	2 7/8	75												UC215 UC215-46		
UCP215-47 UCP215-48	2 15/16 3		3 1/4	10 13/16	8 17/32	2 29/32	1 3/16	1	1 3/32	6 3/8	3.0630	1.3110	3/4	UC215-47 UC215-48	P215	17.3

Low Shaft Height * Wide Inner Ring Bearing * Set Screw Locking
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Solid Base Housing

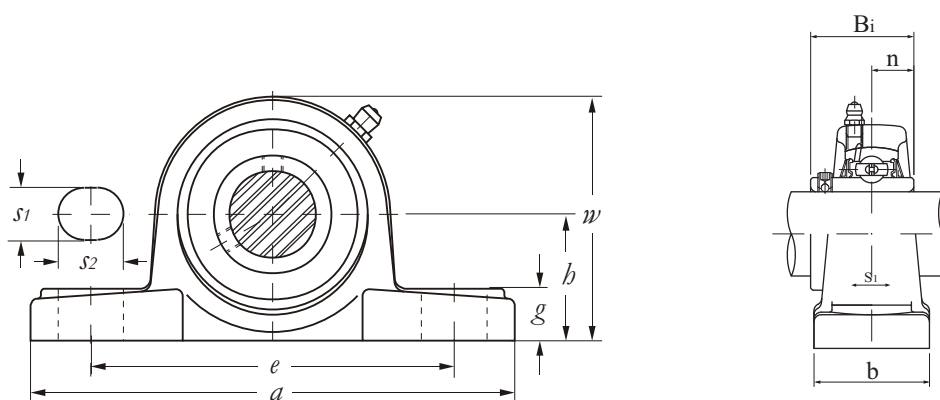


Unit no.	Shaft Dia.		Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	h	a	e	b	S ₂	S ₁	g	w	Bi	n				
UCAK201 UCAK201-8	1/2	12												UC201 UC201-8		
UCAK202 UCAK202-10	5/8	15	1 1/4	5 1/4	3 7/8	1 5/8	9/16	7/16	9/16	2 1/2	1.2205	0.7205	3/8	UC202 UC202-10	AK204	1.87
UCAK203 UCAK203-11	11/16	17												UC203 UC203-11		
UCAK204 UCAK204-12	3/4	20												UC204 UC204-12		
UCAK205 UCAK205-14	7/8	25	1 5/16	5 1/2	4 1/8	1 3/4	9/16	7/16	5/8	2 11/16	1.3386	0.5630	3/8	UC205 UC205-14	AK205	2.20
UCAK205-15 UCAK205-16	15/16 1													UC205-15 UC205-16		
UCAK206 UCAK206-17	1 1/16	30	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.5000	0.6260	1/2	UC206 UC206-17	AK206	3.09
UCAK206-18 UCAK206-19	1 1/8 1 3/16													UC206-18 UC206-19		
UCAK206-20	1 1/4													UC206-20		
UCAK207 UCAK207-20	1 1/4	35	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	1.0890	0.6890	1/2	UC207 UC207-20	AK207	3.90
UCAK207-21 UCAK207-22	1 5/16 1 3/8													UC207-21 UC207-22		
UCAK207-23	1 7/16													UC207-23		
UCAK208 UCAK208-24	1 1/2	40	1 15/16	7 1/8	5 1/2	2 1/8	3/4	9/16	3/4	3 15/16	1.9370	0.7480	1/2	UC208 UC208-24	AK208	4.65
UCAK208-25	1 9/16													UC208-25		
UCAK209 UCAK209-26	1 5/8	45	2 1/16	7 1/2	5 3/4	2 1/8	3/4	9/16	13/16	4 13/16	1.9370	0.7480	1/2	UC209 UC209-26	AK209	5.47
UCAK209-27 UCAK209-28	1 11/16 1 3/4													UC209-27 UC209-28		
UCAK210 UCAK210-30	1 7/8	50	2 3/16	8	6 1/4	2 1/4	3/4	9/16	7/8	4 7/16	2.0315	0.7480	1/2	UC210 UC210-30	AK210	6.46
UCAK210-31 UCAK210-32	1 15/16 2													UC210-31 UC210-32		
UCAK211 UCAK211-32	2	55	2 7/16	9 1/8	7 1/8	2 3/8	15/16	11/16	1	4 29/32	2.1890	0.8740	5/8	UC211 UC211-32	AK211	8.75
UCAK211-34 UCAK211-35	2 1/8 2 3/16													UC211-34 UC211-35		
UCAK212 UCAK212-36	2 1/4	60	2 11/16	9 1/2	7 1/2	2 1/2	15/16	11/16	1 1/8	5 3/8	2.5630	1.0000	5/8	UC212 UC212-36	AK212	11.0
UCAK212-38 UCAK212-39	2 3/8 2 7/16													UC212-38 UC212-39		
UCAK215 UCAK215-47	2 15/16	75	3 5/16	12	9 1/2	3 1/4	1 1/4	7/8	1 1/2	6 17/32	3.0630	1.3110	3/4	UC215 UC215-47	AK215	18.7
UCAK215-48	3													UC215-48		

Standard Shaft Height * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
Medium Duty Housing

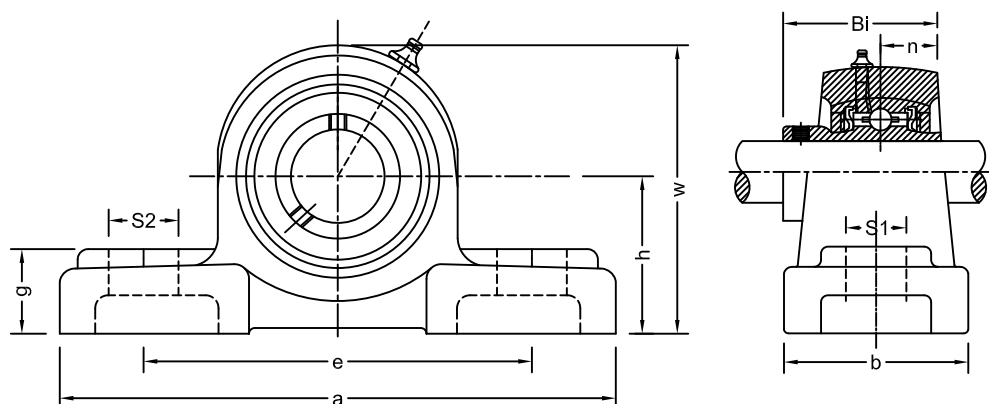

Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight Lbs.
	Inch	h	a	e	b	S2	S1	g	w	Bi	n				
UCPX05-14	7/8	1 3/4	6 1/4	4 11/16	2	1	21/32	5/8	3 3/8	1.5000	0.6260	1/2	UCX05-14	PX05	3.53
UCPX05-15	15/16												UCX05-15		
UCPX05-16	1												UCX05-16		
UCPX06-18	1 1/8	1 7/8	6 7/8	5	2 1/4	1	21/32	21/32	3 11/16	1.6890	0.6890	1/2	UCX06-18	PX06	4.72
UCPX06-19	1 3/16												UCX06-19		
UCPX06-20	1 1/4												UCX06-20		
UCPX07-20	1 1/4	2 1/8	8	5 21/32	2 1/4	1 3/16	21/32	3/4	4 1/8	1.9370	0.7480	1/2	UCX07-20	PX07	6.28
UCPX07-21	1 5/16												UCX07-21		
UCPX07-22	1 3/8												UCX07-22		
UCPX07-23	1 7/16												UCX07-23		
UCPX08-24	1 1/2	2 5/16	8 3/4	6 5/32	2 5/8	1 1/4	25/32	13/16	4 1/2	1.9370	0.7480	5/8	UCX08-24	PX08	8.18
UCPX08-25	1 9/16												UCX08-25		
UCPX09-26	1 5/8	2 15/16	8 3/4	6 5/32	2 5/8	1 5/16	25/32	13/16	4 9/16	2.0315	0.7480	5/8	UCX09-26	PX09	8.05
UCPX09-27	1 11/16												UCX09-27		
UCPX09-28	1 3/4												UCX09-28		
UCPX10-30	1 7/8	2 1/2	9 1/2	6 23/32	2 7/8	1 13/32	25/32	7/8	4 31/32	2.1890	0.8740	5/8	UCX10-30	PX10	9.90
UCPX10-31	1 15/16												UCX10-31		
UCPX10-32	2												UCX10-32		
UCPX11-34	2 1/8	2 3/4	10 1/4	7 1/4	3 1/8	1 13/32	1	1 3/32	5 15/32	2.5630	1.0000	3/4	UCX11-34	PX11	13.8
UCPX11-35	2 3/16												UCX11-35		
UCPX11-36	2 1/4												UCX11-36		
UCPX12-38	2 3/8	3	11 1/4	8	3 9/32	1 9/16	1	1 3/32	5 31/32	2.5630	1.0000	3/4	UCX12-38	PX12	16.6
UCPX12-39	2 7/16												UCX12-39		
UCPX13-40	2 1/2	3	11 1/4	8	3 9/32	1 9/16	1	1 3/32	6 3/32	2.9370	1.1890	3/4	UCX13-40	PX13	18.1
UCPX14-44	2 3/4	3 1/2	13	9 1/32	3 1/2	1 31/32	1 1/16	1 1/4	6 7/8	3.0630	1.3110	7/8	UCX14-44	PX14	23.4
UCPX15-47	2 15/16	3 1/2	13	9 1/32	3 1/2	1 31/32	1 1/16	1 1/4	6 7/8	3.2520	1.3110	7/8	UCX15-47	PX15	27.1
UCPX15-48	3												UCX15-48		

Standard Shaft Height * Wide Inner Ring Bearing * Set Screw Locking
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Tapped Base Housing

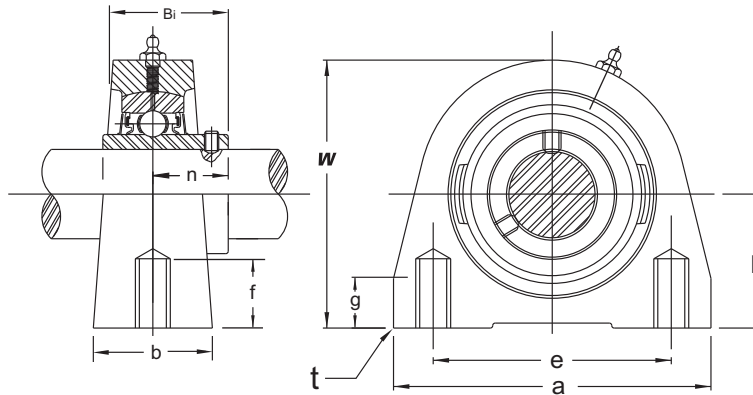


Unit no.	Shaft Dia.	Dimensions (Inch)										Bearing No.	Housing No.	Weight Lbs.
	Inch	h	a	e	b	g	w	f	t	Bi	n			
UCPA201-8	1/2											UC201-8		
UCPA202-10	5/8	1 3/16	3	2 3/64	1 9/16	7/16	2 7/16	19/32	W 3/8	1.2205	0.5000	UC202-10	PA204	1.54
UCPA204-12	3/4											UC204-12		
UCPA205-14	7/8											UC205-14		
UCPA205-15	15/16	1 7/16	3 5/16	2 13/64	1 25/32	15/32	2 27/32	19/32	W 3/8	1.3385	0.5630	UC205-15	PA205	1.79
UCPA205-16	1											UC205-16		
UCPA206-17	1 1/16											UC206-17		
UCPA206-18	1 1/8	1 11/16	3 11/16	2 19/32	1 31/32	15/32	3 5/16	23/32	W 1/2	1.5000	0.6200	UC206-18	PA206	2.70
UCPA206-19	1 3/16											UC206-19		
UCPA206-20	1 1/4											UC206-20		
UCPA207-20	1 1/4											UC207-20		
UCPA207-21	1 5/16	1 7/8	4 11/32	3 5/32	2 5/32	1/2	3 3/4	25/32	W 1/2	1.6590	0.6890	UC207-21	PA207	3.75
UCPA207-22	1 3/8											UC207-22		
UCPA207-23	1 7/16											UC207-23		
UCPA208-24	1 1/2	1 15/16	4 9/16	3 5/16	2 9/32	1/2	3 15/16	25/32	W 1/2	1.9370	0.7480	UC208-24	PA208	4.41
UCPA208-25	1 9/16											UC208-25		
UCPA209-26	1 5/8											UC209-26		
UCPA209-27	1 11/16	2 9/64	4 23/32	3 35/64	2 3/8	1/2	4 1/4	1	W 1/2	1.9370	0.7480	UC209-27	PA209	5.07
UCPA209-28	1 3/4											UC209-28		
UCPA210-30	1 7/8											UC210-30		
UCPA210-31	1 15/16	2 1/4	5 1/8	3 45/64	2 17/32	9/16	4 9/16	1	W 5/8	2.0315	0.7480	UC210-31	PA210	6.39
UCPA210-32	2											UC210-32		

(SBP) Standard Shaft Height * Narrow Inner Ring Bearing * Set Screw Locking

(SBAK) Low Shaft Height * Narrow Inner Ring Bearing * Set Screw Locking

High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin * Solid Base Housing

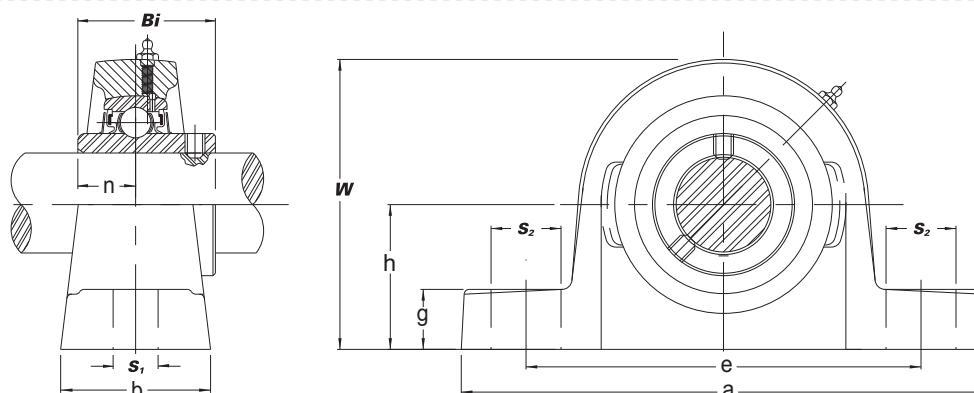


Standard Shaft Height

Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S2	S1	g	w	Bi	n				
SBP201-8 SBP202-10	1/2 5/8	1 1/4	4 15/16	3 3/4	1 1/2	5/8	31/64	1/2	2 1/4	0.867	0.229	3/8	SB201-8 SB202-10	P202	1.29 1.32
SBP204-12	3/4	1 5/16	5	3 3/4	1 1/2	3/4	1/2	1/2	2 17/32	0.984	0.275	3/8	SB204-12	P204	1.39
SBP205-14 SBP205-15 SBP205-16	7/8 15/16 1	1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	1/2	2 25/32	1.062	0.295	3/8	SB205-14 SB205-15 SB205-16	P205	1.83
SBP206-17 SBP206-18 SBP206-19 SBP206-20	1 1/16 1 1/8 1 3/16 1 1/4	1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.181	0.315	1/2	SB206-17 SB206-18 SB206-19 SB206-20	P206	2.95
SBP207-20 SBP207-21 SBP207-22 SBP207-23	1 1/4 1 5/16 1 3/8 1 7/16	1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	1.259	0.335	1/2	SB207-20 SB207-21 SB207-22 SB207-23	P207	3.46
SBP208-24	1 1/2	1 15/16	7 1/4	5 13/32	2 1/8	13/16	21/32	21/32	3 27/32	1.336	0.354	1/2	SB208-24	P208	4.50

Low Shaft Height


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S2	S1	g	w	Bi	n				
SBAK204-12	3/4	1 1/4	5 1/4	3 7/8	1 5/8	9/16	7/16	9/16	2 1/2	0.984	0.275	3/8	SB204-12	AK204	1.81
SBAK205-14 SBAK205-15 SBAK205-16	7/8 15/16 1	1 5/16	5 1/2	4 1/8	1 3/4	9/16	7/16	5/8	2 11/16	1.062	0.295	3/8	SB205-14 SB205-15 SB205-16	AK205	2.14
SBAK206-17 SBAK206-18 SBAK206-19 SBAK206-20	1 1/16 1 1/8 1 3/16 1 1/4	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.181	0.315	1/2	SB206-17 SB206-18 SB206-19 SB206-20	AK206	2.93
SBAK207-20 SBAK207-21 SBAK207-22 SBAK207-23	1 1/4 1 5/16 1 3/8 1 7/16	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	1.259	0.335	1/2	SB207-20 SB207-21 SB207-22 SB207-23	AK207	3.70
SBAK208-24	1 1/2	1 15/16	7 1/8	5 1/2	2 1/8	3/4	9/16	3/4	3 15/16	1.338	0.354	1/2	SB208-24	AK208	4.50

Standard Shaft Height * Narrow Inner Ring Bearing * Set Screw Locking
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Solid Base Housing

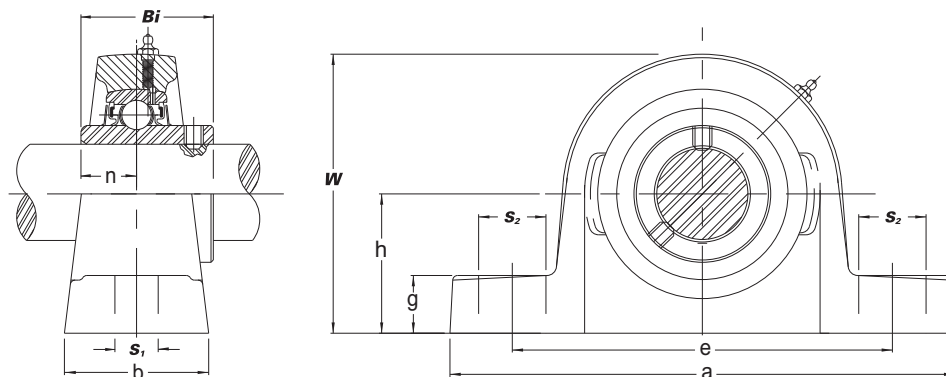


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S ₂	S ₁	g	w	Bi	n				
SBLP201-8	1/2	1 3/16	4 1/2	3 7/16	1	5/8	7/16	15/32	2 1/4	0.866	0.236	3/8	SB201-8	LP203	0.84
SBLP202-10	5/8	1 3/16	4 1/2	3 7/16	1	5/8	7/16	15/32	2 1/4	0.866	0.236	3/8	SB202-10	LP203	0.84
SBLP204-12	3/4	1 5/16	4 29/32	3 13/16	1 1/16	5/8	7/16	1/2	2 9/16	0.984	0.275	3/8	SB204-12	LP204	1.03
SBLP205-14	7/8	1 7/16	5 1/8	3 15/16	1 5/32	5/8	7/16	1/2	2 25/32	1.062	0.295	3/8	SB205-14	LP205	1.28
SBLP205-15	15/16	1 7/16	5 1/8	3 15/16	1 5/32	5/8	7/16	1/2	2 25/32	1.062	0.295	3/8	SB205-15	LP205	1.28
SBLP205-16	1	1 7/16	5 1/8	3 15/16	1 5/32	5/8	7/16	1/2	2 25/32	1.062	0.295	3/8	SB205-16	LP205	1.28
SBLP206-18	1 1/8	1 11/16	6 5/32	4 22/32	1 5/16	13/16	7/16	9/16	3 9/32	1.181	0.315	1/2	SB206-18	LP206	1.50
SBLP206-19	1 3/16	1 11/16	6 5/32	4 22/32	1 5/16	13/16	7/16	9/16	3 9/32	1.181	0.315	1/2	SB206-19	LP206	1.50
SBLP206-20	1 1/4	1 11/16	6 5/32	4 22/32	1 5/16	13/16	7/16	9/16	3 9/32	1.181	0.315	1/2	SB206-20	LP206	1.50
SBLP207-20	1 1/4	1 7/8	6 1/2	5	1 3/8	13/16	9/16	5/8	3 23/32	1.259	0.335	1/2	SB207-20	LP207	2.07
SBLP207-21	1 5/16	1 7/8	6 1/2	5	1 3/8	13/16	9/16	5/8	3 23/32	1.259	0.335	1/2	SB207-21	LP207	2.07
SBLP207-22	1 3/8	1 7/8	6 1/2	5	1 3/8	13/16	9/16	5/8	3 23/32	1.259	0.335	1/2	SB207-22	LP207	2.07
SBLP207-23	1 7/16	1 7/8	6 1/2	5	1 3/8	13/16	9/16	5/8	3 23/32	1.259	0.335	1/2	SB207-23	LP207	2.07
SBLP208-24	1 1/2	2	7 1/4	5 1/2	1 5/32	7/8	9/16	23/32	4 1/32	1.338	0.354	1/2	SB208-24	LP208	3.96

Standard Base * Narrow Inner Ring Bearing * Set Screw Locking
 Ductile Iron Housing * Relubricatable with Anti-Rotation Pin
 Narrow Base Housing

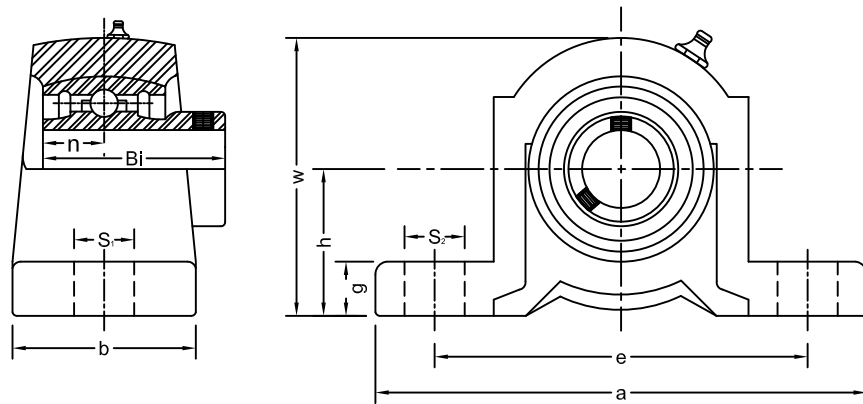



Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S ₂	S ₁	g	w	Bi	n				
SBPSD201-8	1/2	1 3/16	4 1/2	3 7/16	1	5/8	7/16	1/4	2 1/8	0.866	0.236	3/8	SB201-8	PSD203	0.62
SBPSD202-10	5/8												SB202-10		
SBPSD204-12	3/4	1 5/16	4 15/16	3 13/16	1 1/16	5/8	7/16	9/32	2 13/16	0.984	0.275	3/8	SB204-12	PSD204	0.79
SBPSD205-14	7/8												SB205-14		
SBPSD205-15	15/16	1 7/16	5 1/8	3 15/16	1 1/8	5/8	7/16	9/32	2 21/32	1.062	0.295	3/8	SB205-15	PSD205	1.06
SBPSD205-16	1												SB205-16		
SBPSD206-18	1 1/8												SB206-18		
SBPSD206-19	1 3/16	1 11/16	6 5/32	4 22/32	1 5/16	13/16	9/16	5/16	3 1/8	1.181	0.315	1/2	SB206-19	PSD206	1.68
SBPSD206-20	1 1/4												SB206-20		
SBPSD207-20	1 1/4												SB207-20		
SBPSD207-21	1 5/16	1 7/8	6 1/2	5	1 3/8	13/16	9/16	11/32	3 9/16	1.259	0.335	1/2	SB207-21	PSD207	2.277
SBPSD207-22	1 3/8												SB207-22		
SBPSD207-23	1 7/16												SB207-23		

Standard Shaft Height * Wide Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

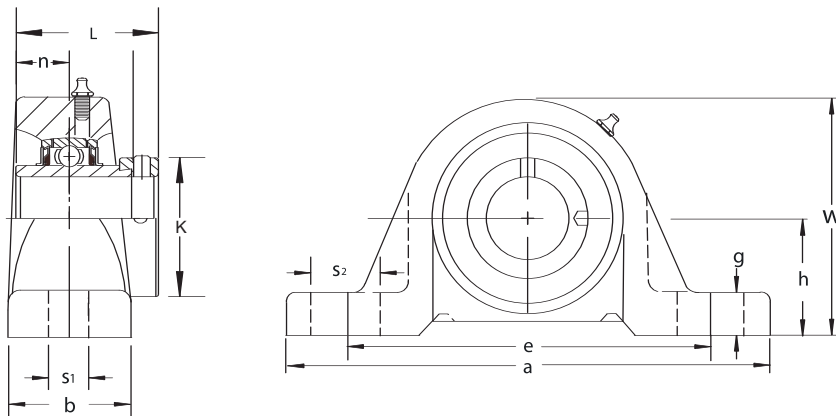


Unit no.	Shaft Dia.		Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight Lbs.
	Inch	mm	h	a	e	b	S2	S1	g	w	L	n	K				
HCP204 HCP204-10 HCP204-12	3/4	20	1 5/16	5	3 3/4	1 1/2	3/4	1/2	1/2	2 17/32	1.720	0.673	1 1/4	3/8	HC204 HC204-10 HC204-12	P204	1.54
HCP205 HCP205-14 HCP205-15 HCP205-16	7/8 15/16 1	25	1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	1/2	2 25/32	1.748	0.688	1 1/2	3/8	HC205 HC205-14 HC205-15 HC205-16	P205	1.94
HCP206 HCP206-17 HCP206-18 HCP206-19 HCP206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.905	0.720	1 3/4	1/2	HC206 HC206-17 HC206-18 HC206-19 HC206-20	P206	3.22
HCP207 HCP207-20 HCP207-21 HCP207-22 HCP207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	2.016	0.742	2 3/16	1/2	HC207 HC207-20 HC207-21 HC207-22 HC207-23	P207	3.84
HCP208 HCP208-24 HCP208-25	1 1/2 1 9/16	40	1 15/16	7 1/4	5 13/32	2 1/8	13/16	21/32	21/32	3 27/32	2.220	0.844	2 3/8	1/2	HC208 HC208-24 HC208-25	P208	4.96
HCP209 HCP209-26 HCP209-27 HCP209-28	1 5/8 1 11/16 1 3/4	45	2 1/8	7 15/32	5 3/4	2 1/8	13/16	21/32	21/32	4 3/16	2.220	0.844	2 1/2	1/2	HC209 HC209-26 HC209-27 HC209-28	P209	5.58
HCP210 HCP210-30 HCP210-31 HCP210-32	1 7/8 1 15/16 2	50	2 1/4	8 1/8	6 1/4	2 3/8	7/8	25/32	3/4	4 7/16	2.468	0.969	2 3/4	5/8	HC210 HC210-30 HC210-31 HC210-32	P210	6.92
HCP211 HCP211-32 HCP211-34 HCP211-35	2 2 1/8 2 3/16	55	2 1/2	8 5/8	6 23/32	2 3/8	7/8	25/32	3/4	4 29/32	2.814	1.049	3	5/8	HC211 HC211-32 HC211-34 HC211-35	P211	8.71
HCP212 HCP212-36 HCP212-38 HCP212-39	2 1/4 2 3/8 2 7/16	60	2 3/4	9 1/2	7 1/4	2 3/4	1	25/32	7/8	5 7/16	3.062	1.219	3.062	3/8	HC212 HC212-36 HC212-38 HC212-39	P212	12.1
HCP215-47 HCP215-48	2 15/16 3		3 1/4	10 13/16	8 17/32	2 29/32	1 3/16	1	1 3/32	6 3/8	3.374	1.469	4 1/32	3/4	HC215-47 HC215-48	P215	19.9

Low Shaft Height * Wide Inner Ring Bearing * Eccentric Locking Collar
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Solid Base Housing

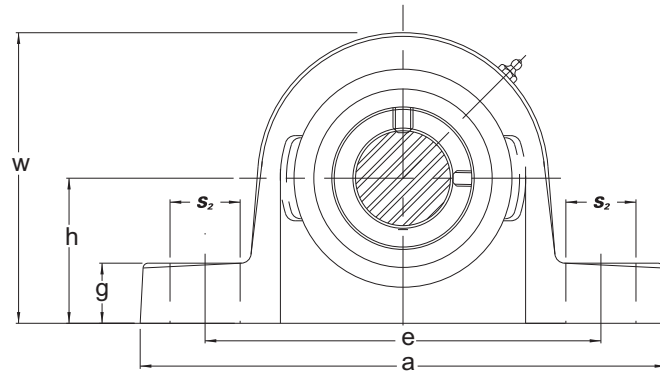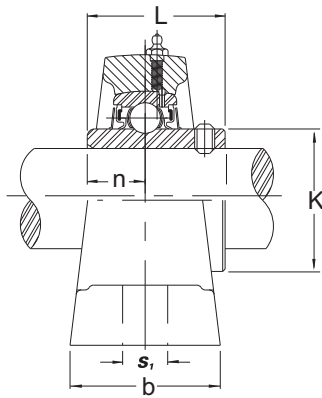

Unit no.	Shaft Dia.		Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	h	a	e	b	S ₂	S ₁	g	w	L	n	K				
HCAK204 HCAK204-12	3/4	20	1 1/4	5 1/4	3 7/8	1 5/8	9/16	7/16	9/16	2 1/2	1.720	0.673	1 1/4	3/8	HC204 HC204-12	AK204	1.96
HCAK205 HCAK205-14 HCAK205-15 HCAK205-16	7/8 15/16 1	25	1 5/16	5 1/2	4 1/8	1 3/4	9/16	7/16	5/8	2 11/16	1.746	0.684	1 1/2	3/8	HC205 HC205-14 HC205-15 HC205-16	AK205	2.25
HCAK206 HCAK206-17 HCAK206-18 HCAK206-19 HCAK206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.905	0.720	1 3/4	1/2	HC206 HC206-17 HC206-18 HC206-19 HC206-20	AK206	3.20
HCAK207 HCAK207-20 HCAK207-21 HCAK207-22 HCAK207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	2.016	0.742	2 3/16	1/2	HC207 HC207-20 HC207-21 HC207-22 HC207-23	AK207	4.08
HCAK208 HCAK208-24 HCAK208-25	1 1/2 1 9/16	40	1 15/16	7 1/8	5 1/2	2 1/8	3/4	9/16	3/4	3 15/16	2.220	0.844	2 3/8	1/2	HC208 HC208-24 HC208-25	AK208	4.94
HCAK209 HCAK209-26 HCAK209-27 HCAK209-28	1 5/8 1 11/16 1 3/4	45	2 1/16	7 1/2	5 3/4	2 1/8	3/4	9/16	13/16	4 13/16	2.220	0.844	2 1/2	1/2	HC209 HC209-26 HC209-27 HC209-28	AK209	5.73
HCAK210 HCAK210-30 HCAK210-31 HCAK210-32	1 7/8 1 15/16 2	50	2 3/16	8	6 1/4	2 1/4	3/4	9/16	7/8	4 7/16	2.468	0.989	2 3/4	1/2	HC210 HC210-30 HC210-31 HC210-32	AK210	6.90
HCAK211 HCAK211-32 HCAK211-34 HCAK211-35	2 2 1/8 2 3/16	55	2 7/16	9 1/8	7 1/8	2 3/8	15/16	11/16	1	4 29/32	2.814	1.049	3	5/8	HC211 HC211-32 HC211-34 HC211-35	AK211	9.39
HCAK212 HCAK212-36 HCAK212-38 HCAK212-39	2 1/4 2 3/8 2 7/16	60	2 11/16	9 1/2	7 1/2	2 1/2	15/16	11/16	1 1/8	5 3/8	3.062	1.219	3 5/16	5/8	HC212 HC212-36 HC212-38 HC212-39	AK212	11.8
HCAK215-47 HCAK215-48	2 15/16 3		3 5/16	12	9 1/2	3 1/4	1 1/4	7/8	1 1/2	6 17/32	3.374	1.468	4 1/32	3/4	HC215-47 HC215-48	AK215	19.9

SAK - Standard Shaft Height * Narrow Inner Ring Bearing * Eccentric Locking Collar
 SBAK - Low Shaft Height * Narrow Inner Ring Bearing * Eccentric Locking Collar
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin * Solid Base Housing

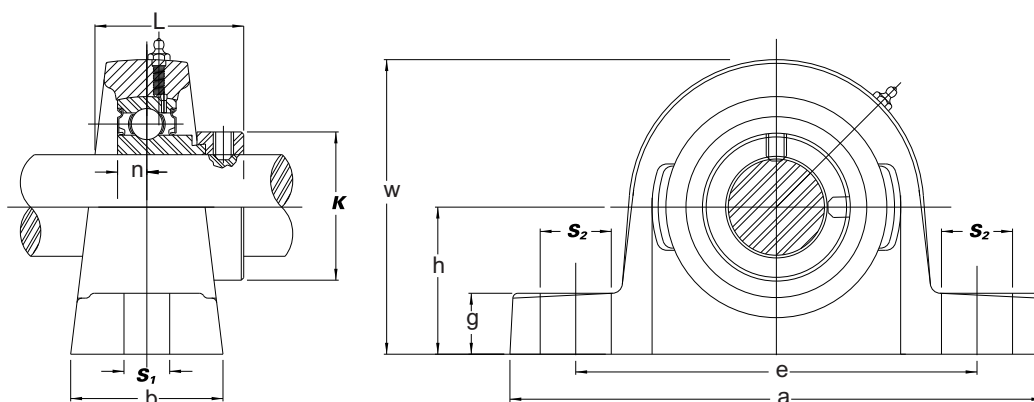


Standard Shaft Height

Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S2	S1	g	w	L	n	K				
SAP201-8	1/2	1 1/4	4 15/16	3 3/4	1 1/2	5/8	1/2	17/32	2 17/64	1.128	0.232	1 1/8	3/8	SA201-8	P202	1.39
SAP202-10	5/8	1 1/4	4 15/16	3 3/4	1 1/2	5/8	1/2	17/32	2 17/64	1.155	0.232	1 1/4	3/8	SA202-10	P202	1.44
SAP204-12	3/4	1 5/16	5	3 3/4	1 1/2	3/4	1/2	1/2	2 11/32	1.218	0.295	1 1/4	3/8	SA204-12	P204	1.43
SAP205-14	7/8	1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	1/2	2 25/32	1.218	0.295	1 1/2	3/8	SA205-14	P205	1.87
SAP205-15	15/16	1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	1/2	2 25/32	1.218	0.295	1 1/2	3/8	SA205-15	P205	1.87
SAP205-16	1	1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	1/2	2 25/32	1.218	0.295	1 1/2	3/8	SA205-16	P205	1.87
SAP206-17	1 1/16	1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.406	0.354	1 3/4	1/2	SA206-17	P206	3.09
SAP206-18	1 1/8	1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.406	0.354	1 3/4	1/2	SA206-18	P206	3.09
SAP206-19	1 3/16	1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.406	0.354	1 3/4	1/2	SA206-19	P206	3.09
SAP206-20	1 1/4	1 11/16	6 1/2	4 3/4	1 7/8	13/16	21/32	19/32	3 5/16	1.406	0.354	1 3/4	1/2	SA206-20	P206	3.09
SAP207-20	1 1/4	1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	1.531	0.374	2 3/16	1/2	SA207-20	P207	3.70
SAP207-21	1 5/16	1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	1.531	0.374	2 3/16	1/2	SA207-21	P207	3.70
SAP207-22	1 3/8	1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	1.531	0.374	2 3/16	1/2	SA207-22	P207	3.70
SAP207-23	1 7/16	1 7/8	6 9/16	5	1 7/8	13/16	21/32	5/8	3 21/32	1.531	0.374	2 3/16	1/2	SA207-23	P207	3.70
SAP208-24	1 1/2	1 15/16	7 1/4	5 13/32	2 1/8	13/16	21/32	21/32	3 27/32	1.719	0.433	2 3/8	1/2	SA208-24	P208	4.67

Low Shaft Height


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S2	S1	g	w	L	n	k				
SAK204-12	3/4	1 1/4	5 1/4	3 7/8	1 5/8	9/16	7/16	9/16	2 1/2	1.218	0.295	1 1/4	3/8	SA204-12	AK204	1.85
SAK205-14	7/8	1 5/16	5 1/2	4 1/8	1 3/4	9/16	7/16	5/8	2 11/16	1.218	0.295	1 1/2	3/8	SA205-14	AK205	2.18
SAK205-15	15/16	1 5/16	5 1/2	4 1/8	1 3/4	9/16	7/16	5/8	2 11/16	1.218	0.295	1 1/2	3/8	SA205-15	AK205	2.18
SAK205-16	1	1 5/16	5 1/2	4 1/8	1 3/4	9/16	7/16	5/8	2 11/16	1.218	0.295	1 1/2	3/8	SA205-16	AK205	2.18
SAK206-17	1 1/16	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.406	0.354	1 3/4	1/2	SA206-17	AK206	3.06
SAK206-18	1 1/8	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.406	0.354	1 3/4	1/2	SA206-18	AK206	3.06
SAK206-19	1 3/16	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.406	0.354	1 3/4	1/2	SA206-19	AK206	3.06
SAK206-20	1 1/4	1 9/16	6 5/16	4 3/4	1 7/8	3/4	9/16	11/16	3 5/32	1.406	0.354	1 3/4	1/2	SA206-20	AK206	3.06
SAK207-20	1 1/4	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	1.531	0.374	2 3/16	1/2	SA207-20	AK207	3.95
SAK207-21	1 5/16	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	1.531	0.374	2 3/16	1/2	SA207-21	AK207	3.95
SAK207-22	1 3/8	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	1.531	0.374	2 3/16	1/2	SA207-22	AK207	3.95
SAK207-23	1 7/16	1 13/16	6 9/16	5	1 7/8	3/4	9/16	3/4	3 5/8	1.531	0.374	2 3/16	1/2	SA207-23	AK207	3.95
SAK208-24	1 1/2	1 15/16	7 1/8	5 1/2	2 1/8	3/4	9/16	3/4	3 15/16	1.719	0.433	2 3/8	1/2	SA208-24	AK208	4.65

Standard Shaft Height * Narrow Inner Ring Bearing * Eccentric Locking
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Solid Base Housing

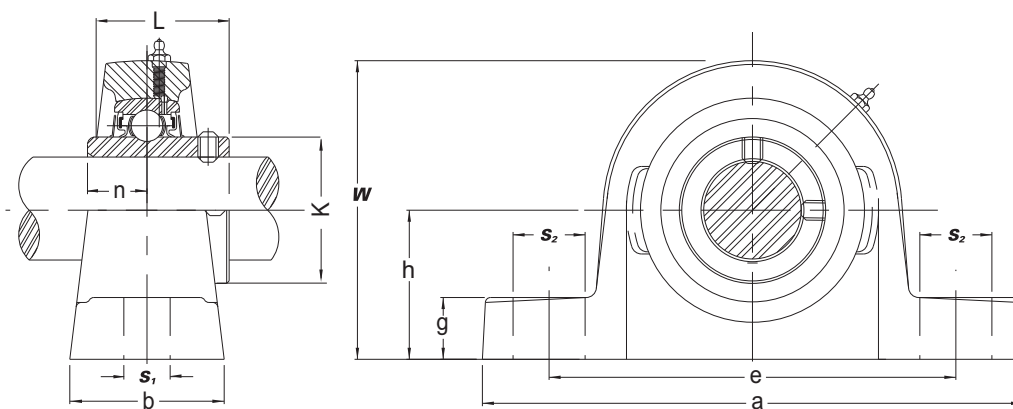


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S ₂	S ₁	g	w	L	n	K				
SALP201-8	1/2	1 3/16	4 1/2	3 7/16	1	5/8	7/16	15/32	2 1/4	1.125	0.256	1 1/8	3/8	SA201-8	LP203	0.90
SALP202-10	5/8	1 5/16	4 29/32	3 13/16	1 1/16	5/8	7/16	1/2	2 9/16	1.218	0.295	1 1/4	3/8	SA202-10	LP204	1.17
SALP205-14	7/8	1 7/16	5 1/8	3 15/16	1 5/32	5/8	7/16	1/2	2 25/32	1.218	0.295	1 1/2	3/8	SA205-14	LP205	1.39
SALP205-15	15/16													SA205-15		
SALP205-16	1													SA205-16		
SALP206-18	1 1/8	1 11/16	6 5/32	4 22/32	1 5/16	13/16	7/16	9/16	3 9/32	1.406	0.354	1 3/4	1/2	SA206-18	LP206	1.67
SALP206-19	1 3/16													SA206-19		
SALP206-20	1 1/4													SA206-20		
SALP207-20	1 1/4	1 7/8	6 1/2	5	1 3/8	13/16	9/16	5/8	3 23/32	1.531	0.374	2 3/16	1/2	SA207-20	LP207	2.42
SALP207-21	1 5/16													SA207-21		
SALP207-22	1 3/8													SA207-22		
SALP207-23	1 7/16													SA207-23		
SALP208-24	1 1/2	2	7 1/4	5 1/2	1 15/32	7/8	9/16	23/32	4 1/32	1.719	0.433	2 3/8	1/2	SA208-24	LP208	4.18

Standard Shaft Height * Narrow Inner Ring Bearing * Eccentric Locking
 Ductile Iron Narrow Housing * Relubricatable with Anti-Rotation Pin
 Narrow Base Housing

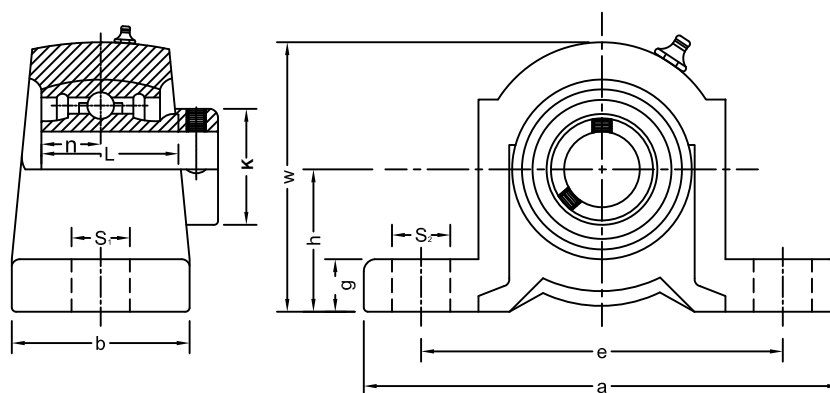


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	h	a	e	b	S ₂	S ₁	g	w	L	n	K				
SAPSD201-8	1/2	1 3/16	4 1/2	3 7/16	1	5/8	7/16	1/4	2 1/8	1.125	.256	1 1/8	3/8	SA201-8	PSD203	0.68
SAPSD202-10	5/8	1 3/16	4 1/2	3 7/16	1	5/8	7/16	1/4	2 1/8	1.125	.256	1 1/8	3/8	SA202-10	PSD203	0.68
SAPSD204-12	3/4	1 5/16	4 15/16	3 13/16	1 1/16	5/8	7/16	9/32	2 13/32	1.218	.295	1 1/4	3/8	SA204-12	PSD204	0.84
SAPSD205-14	7/8	1 7/16	5 1/8	3 15/16	1 1/8	5/8	7/16	9/32	2 21/32	1.218	.295	1 1/2	3/8	SA205-14	PSD205	1.10
SAPSD205-15	15/16	1 7/16	5 1/8	3 15/16	1 1/8	5/8	7/16	9/32	2 21/32	1.218	.295	1 1/2	3/8	SA205-15		
SAPSD205-16	1	1 7/16	5 1/8	3 15/16	1 1/8	5/8	7/16	9/32	2 21/32	1.218	.295	1 1/2	3/8	SA205-16		
SAPSD206-18	1 1/8	1 11/16	6 5/32	4 23/32	1 5/16	13/16	9/16	5/16	3 1/8	1.406	.354	1 3/4	1/2	SA206-18	PSD206	1.81
SAPSD206-19	1 3/16	1 11/16	6 5/32	4 23/32	1 5/16	13/16	9/16	5/16	3 1/8	1.406	.354	1 3/4	1/2	SA206-19		
SAPSD206-20	1 1/4	1 11/16	6 5/32	4 23/32	1 5/16	13/16	9/16	5/16	3 1/8	1.406	.354	1 3/4	1/2	SA206-20		
SAPSD207-20	1 1/4	1 7/8	6 1/2	5	1 3/8	13/16	9/16	11/32	3 9/16	1.531	.374	2 3/16	1/2	SA207-20	PSD207	2.56
SAPSD207-21	1 5/16	1 7/8	6 1/2	5	1 3/8	13/16	9/16	11/32	3 9/16	1.531	.374	2 3/16	1/2	SA207-21		
SAPSD207-22	1 3/8	1 7/8	6 1/2	5	1 3/8	13/16	9/16	11/32	3 9/16	1.531	.374	2 3/16	1/2	SA207-22		
SAPSD207-23	1 7/16	1 7/8	6 1/2	5	1 3/8	13/16	9/16	11/32	3 9/16	1.531	.374	2 3/16	1/2	SA207-23		

Standard 2 Bolt * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

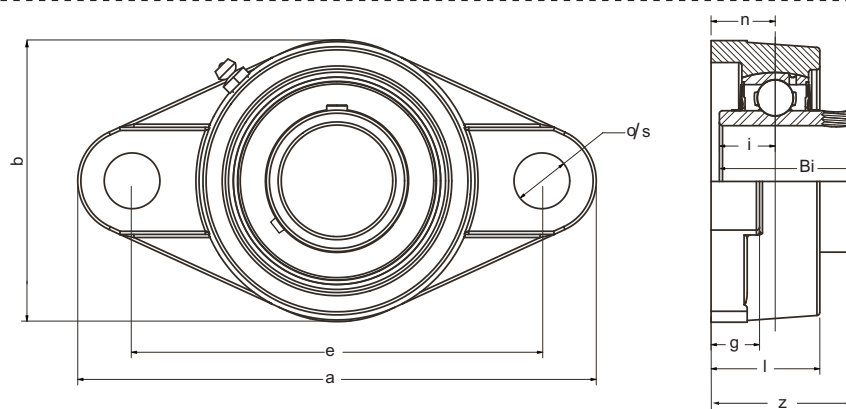


Unit no.	Shaft Dia.		Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight Lbs
	Inch	mm	a	e	g	l	s	b	z	Bi	n				
UCFL201		12											UC201		
UCFL201-8	1/2	15											UC201-8		
UCFL202		15											UC202		
UCFL202-10	5/8	17	4 7/16	3 35/64	7/16	1	15/32	2 3/8	1 5/16	1.2205	0.5000	3/8	UC202-10	FL204	1.10
UCFL203		17											UC203		
UCFL203-11	11/16	20											UC203-11		
UCFL204		20											UC204		
UCFL204-12	3/4												UC204-12		
UCFL205		25											UC205		
UCFL205-14	7/8		5 1/8	3 57/64	1/2	1 1/16	5/8	2 11/16	1 15/32	1.3386	0.5630	1/2	UC205-14	FL205	1.54
UCFL205-15	15/16												UC205-15		
UCFL205-16	1												UC205-16		
UCFL206		30											UC206		
UCFL206-17	1 1/16		5 13/16	4 39/64	1/2	1 7/32	5/8	3 5/32	1 19/32	1.5000	0.6250	1/2	UC206-17	FL206	2.16
UCFL206-18	1 1/8												UC206-18		
UCFL206-19	1 3/16												UC206-19		
UCFL206-20	1 1/4												UC206-20		
UCFL207		35											UC207		
UCFL207-20	1 1/4		6 11/32	5 1/8	9/16	1 11/32	5/8	3 17/32	1 3/4	1.6890	0.6890	1/2	UC207-20	FL207	2.98
UCFL207-21	1 5/16												UC207-21		
UCFL207-22	1 3/8												UC207-22		
UCFL207-23	1 7/16												UC207-23		
UCFL208		40											UC208		
UCFL208-24	1 1/2		6 7/8	5 43/64	9/16	1 13/32	5/8	3 15/16	2 1/64	1.9370	0.7480	1/2	UC208-24	FL208	3.73
UCFL208-25	1 9/16												UC208-25		
UCFL209		45											UC209		
UCFL209-26	1 5/8		7 13/32	5 53/64	19/32	1 1/2	3/4	4 1/4	2 1/16	1.9370	0.7480	5/8	UC209-26	FL204	4.50
UCFL209-27	1 11/16												UC209-27		
UCFL209-28	1 3/4												UC209-28		
UCFL210		50											UC210		
UCFL210-30	1 7/8		7 3/4	6 3/16	19/32	1 9/16	3/4	4 17/32	2 5/32	2.0315	0.7480	5/8	UC210-30	FL205	5.07
UCFL210-31	1 15/16												UC210-31		
UCFL210-32	2												UC210-32		
UCFL211		55											UC211		
UCFL211-32	2		8 13/16	7 1/4	23/32	1 11/16	3/4	5 1/8	2 5/16	2.1890	0.8740	5/8	UC211-32	FL206	7.28
UCFL211-34	2 1/8												UC211-34		
UCFL211-35	2 3/16												UC211-35		
UCFL212		60											UC212		
UCFL212-36	2 1/4		9 27/32	7 61/64	23/32	1 7/8	29/32	5 1/2	2 23/32	2.5630	1.0000	3/4	UC212-36	FL207	9.48
UCFL212-38	2 3/8												UC212-38		
UCFL212-39	2 7/16												UC212-39		
UCFL213		65											UC213		
UCFL213-40	2 1/2		10 5/32	8 17/64	25/32	1 31/32	29/32	6 3/32	2 3/4	2.5630	1.0000	3/4	UC213-40	FL208	11.90

2 Bolt Flange * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

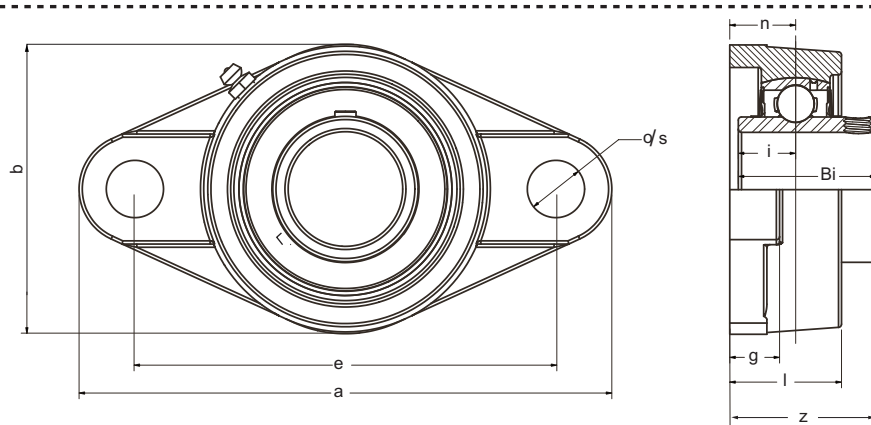


Unit no.	Shaft Dia.		Dimensions (Inch)										Bolt Size	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	a	e	i	g	l	s	b	z	Bi	n				
UCFT201	1/2	12	4 13/32	3 17/32	3/4	7/16	1 5/32	13/32	2 3/8	1 25/32	1.2205	0.5000	5/16	UC201	FT204	1.28
UCFT201-8		15												UC201-8		
UCFT202	5/8	17												UC202		
UCFT202-10		20												UC202-10		
UCFT203	11/16	20												UC203		
UCFT203-11		25												UC203-11		
UCFT204	3/4	25												UC204	FT205	1.83
UCFT204-12		30												UC204-12		
UCFT205	7/8	30	4 7/8	3 57/64	25/32	17/32	1 7/32	1/2	2 3/4	1 27/32	1.3386	0.5630	3/8	UC205		
UCFT205-14		35												UC205-14		
UCFT205-15	15/16	40												UC205-15		
UCFT205-16		45												UC205-16		
UCFT206	1 1/16	45												UC206	FT206	2.32
UCFT206-17		50	5 9/16	4 19/32	53/64	17/32	1 11/32	1/2	3 1/4	2	1.5000	0.6260	3/8	UC206-17		
UCFT206-18	1 1/8	55												UC206-18		
UCFT206-19		60												UC206-19		
UCFT206-20	1 3/8	65												UC206-20		
UCFT207		70												UC207	FT207	3.46
UCFT207-20	1 1/4	75	6 1/8	5 1/8	27/32	9/16	1 7/16	35/64	3 3/4	2 1/8	1.6890	0.6890	7/16	UC207-20		
UCFT207-21		80												UC207-21		
UCFT207-22	1 5/8	85												UC207-22		
UCFT207-23		90												UC207-23		
UCFT208	1 1/2	95	6 3/4	5 21/32	15/16	9/16	1 17/32	35/64	4 1/8	2 5/16	1.9370	0.7480	7/16	UC208	FT208	4.34
UCFT208-24		100												UC208-24		
UCFT208-25	1 9/16	105												UC208-25		
UCFT209		110												UC209	FT209	5.12
UCFT209-26	1 5/8	115	7 1/16	5 27/32	15/16	9/16	1 9/16	5/8	4 3/8	2 5/16	1.9370	0.7480	1/2	UC209-26		
UCFT209-27		120												UC209-27		
UCFT209-28	1 11/16	125												UC209-28		
UCFT210		130												UC210	FT210	5.95
UCFT210-30	1 7/8	135	7 7/16	6 3/16	1 1/8	9/16	1 27/32	5/8	4 9/16	2 5/8	2.0315	0.7480	1/2	UC210-30		
UCFT210-31		140												UC210-31		
UCFT210-32	1 15/16	145												UC210-32		
UCFT211		150												UC211	FT211	8.95
UCFT211-32	2	155	8 1/2	7 1/4	1 17/64	13/16	1 31/32	45/64	5 1/4	2 31/32	2.1890	0.8740	9/16	UC211-32		
UCFT211-34		160												UC211-34		
UCFT211-35	2 1/8	165												UC211-35		
UCFT211-36		170												UC211-36		

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

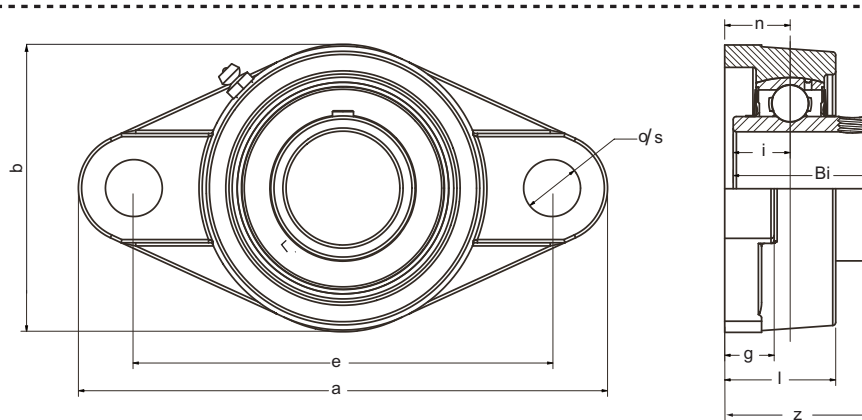


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	b	z	Bi	n				
SBFT201-8	1/2	3 7/8	3	45/64	7/16	1	25/64	2 11/64	1 21/64	0.866	0.236	5/16	SB201-8	FT203	0.85
SBFT202-10	5/8	4 13/32	3 17/32	3/4	7/16	1 5/32	13/32	2 3/8	1 7/16	0.984	0.275	5/16	SB202-10	FT204	1.21
SBFT205-14	7/8	4 7/8	3 57/64	25/32	17/32	1 7/32	1/2	2 3/4	1 35/64	1.062	0.296	3/8	SB205-14	FT205	1.76
SBFT205-15	15/16												SB205-15		
SBFT205-16	1												SB205-16		
SBFT206-17	1 1/16	5 9/16	4 19/32	53/64	17/32	1 11/32	1/2	3 1/4	1 11/16	1.181	0.315	3/8	SB206-17	FT206	2.16
SBFT206-18	1 1/8												SB206-18		
SBFT206-19	1 3/16												SB206-19		
SBFT206-20	1 1/4												SB206-20		
SBFT207-20	1 1/4	6 1/8	5 1/8	27/32	9/16	1 7/16	35/64	3 3/4	1 25/32	1.259	0.335	7/16	SB207-20	FT207	3.26
SBFT207-21	1 5/16												SB207-21		
SBFT207-22	1 3/8												SB207-22		
SBFT207-23	1 7/16												SB207-23		
SBFT208-24	1 1/2	6 3/4	5 21/32	15/16	9/16	1 17/32	35/64	4 1/8	1 59/64	1.338	0.354	7/16	SB208-24	FT208	4.17
SBFT209-26	1 5/8	7 1/16	5 27/32	15/16	9/16	1 9/16	5/8	4 3/8	2 3/64	1 5/8	0.402	1/2	SB209-26	FT209	4.10
SBFT209-27	1 11/16												SB209-27		
SBFT209-28	1 3/4												SB209-28		
SBFT210-30	1 7/8	7 7/16	6 3/16	1 3/8	9/16	1 27/32	5/8	4 9/16	2 5/32	1 23/32	0.430	1/2	SB210-30	FT210	4.4
SBFT210-31	1 15/16												SB210-31		
SBFT211-32	2	8 1/2	7 1/4	1 17/64	13/16	1 31/32	45/64	5 1/4	2 5/16	1 25/37	0.466	9/16	SB211-32	FT211	7.2
SBFT211-34	2 1/8												SB211-34		
SBFT211-35	2 3/16												SB211-35		
SBFT212-36	2 1/4	9 5/16	7 15/16	1 23/64	13/16	2 3/32	23/32	5 17/32	2 11/16	2 1/8	0.585	9/16	SB212-36	FT212	8.9
SBFT212-38	2 3/8												SB212-38		
SBFT212-39	2 7/16												SB212-39		

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

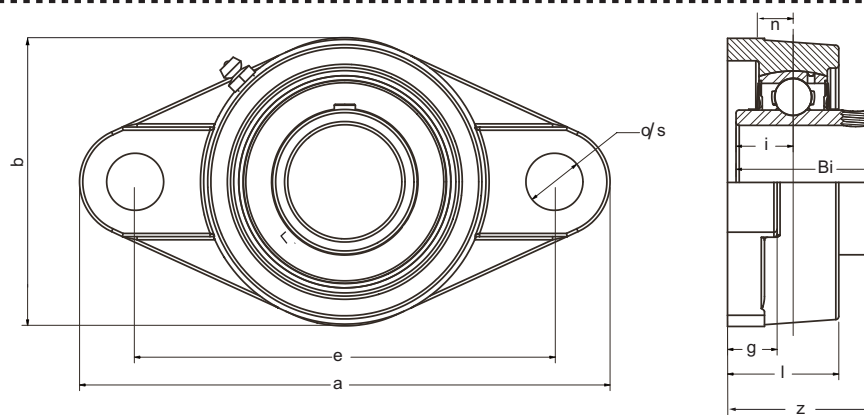


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	b	z	Bi	n				
SBFL201-8	1/2	3 7/8	3	19/32	7/16	1	25/32	2 7/32	1 17/32	0.866	0.236	5/16	SB201-8	FL203	0.85
SBFL202-10	5/8												SB202-10		
SBFL204-12	3/4	4 7/16	3 35/64	19/32	7/16	1	15/32	2 3/8	1 5/16	0.984	0.275	3/8	SB204-12	FL204	1.04
SBFL205-14	7/8												SB205-14		
SBFL205-15	15/16	5 1/8	3 57/64	5/8	1/2	1 1/16	5/8	2 11/16	1 15/32	1.062	0.295	1/2	SB205-15	FL205	1.48
SBFL205-16	1												SB205-16		
SBFL206-17	1 1/16												SB206-17		
SBFL206-18	1 1/8	5 13/16	4 39/64	45/64	1/2	1 7/32	5/8	3 5/32	1 19/32	1.181	0.315	1/2	SB206-18	FL206	2.01
SBFL206-19	1 3/16												SB206-19		
SBFL206-20	1 1/4												SB206-20		
SBFL207-20	1 1/4												SB207-20		
SBFL207-21	1 5/16	6 11/32	5 1/8	3/4	9/16	1 11/32	5/8	3 17/32	1 3/4	1.259	0.335	1/2	SB207-21	FL207	2.78
SBFL207-22	1 3/8												SB207-22		
SBFL207-23	1 7/16												SB207-23		
SBFL208-24	1 1/2	6 7/8	5 43/64	53/64	9/16	1 13/32	5/8	3 15/16	2 1/64	1.338	0.354	1/2	SB208-24	FL208	3.55

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Narrow Housing

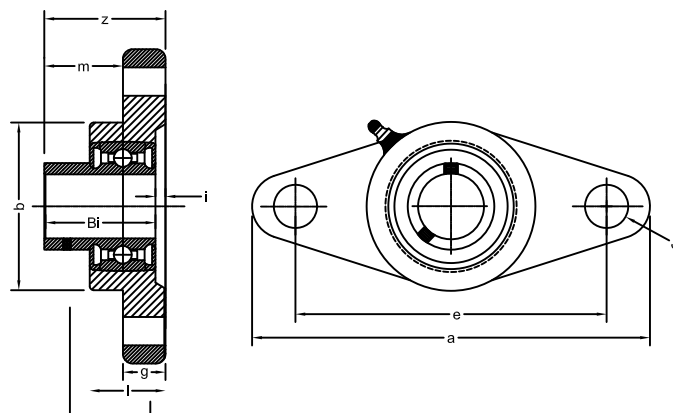


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.
	Inch	a	e	i	g	l	s	b	z	Bi	m			
SBFTN201-8	1/2	3 7/8	3	0.448	3/8	23/32	7/16	2 1/8	1.087	0.866	0.630	3/8	SB201-8	FTN203
SBFTN202-10	5/8												SB202-10	
SBFTN204-12	3/4	4 13/32	3 17/32	0.495	7/16	13/16	7/16	2 1/2	1.203	0.984	0.708	3/8	SB204-12	FTN204
SBFTN205-14	7/8												SB205-14	FTN205
SBFTN205-15	15/16	4 7/8	3 57/64	0.483	7/16	13/16	33/64	2 3/4	1.250	1.062	0.767	7/16	SB205-15	
SBFTN205-16	1												SB205-16	
SBFTN206-17	1 1/16												SB206-17	FTN206
SBFTN206-18	1 1/8	5 9/16	4 19/32	0.478	17/32	61/64	33/64	3 1/8	1.344	1.181	0.866	7/16	SB206-18	
SBFTN206-19	1 3/16												SB206-19	
SBFTN206-20	1 1/4												SB206-20	
SBFTN207-20	1 1/4												SB207-20	FTN207
SBFTN207-21	1 5/16	6 1/8	5 1/8	0.575	19/32	1 3/64	35/64	3 5/8	1.500	1.259	0.925	1/2	SB207-21	
SBFTN207-22	1 3/8												SB207-22	
SBFTN207-23	1 7/16												SB207-23	
SBFTN208-24	1 1/2	6 3/4	5 21/32	0.610	5/8	1 1/8	35/64	4 1/8	1.594	1.338	0.984	1/2	SB208-24	FTN208
SBFTN208-25	1 9/16												SB208-25	
SBFTN209-26	1 5/8												SB209-26	FTN209
SBFTN209-27	1 11/16	7 1/16	5 27/32	0.544	5/8	1 1/8	5/8	4 3/8	1.610	1.439	1.066	9/16	SB209-27	
SBFTN209-28	1 3/4												SB209-28	

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

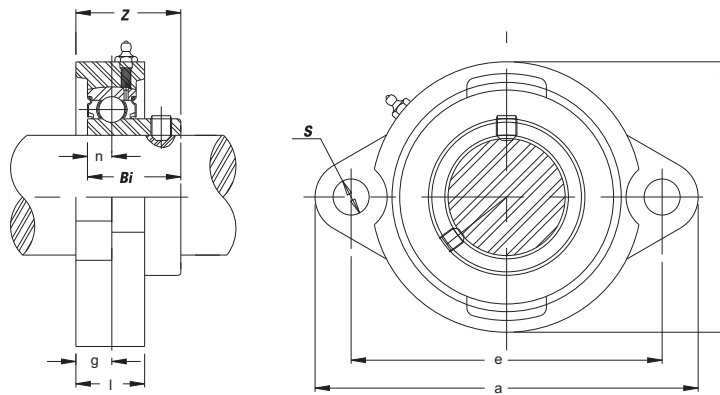


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	g	l	s	b	z	Bi	n				
SBLF201-8	1/2	3 3/16	2 1/2	3/8	23/32	5/16	2 7/32	1	0.866	0.236	1/4	SB201-8	LF203	0.60
SBLF202-10	5/8											SB202-10		
SBLF204-12	3/4	3 17/32	2 13/16	7/16	25/32	25/64	2 13/32	1 5/32	0.984	0.275	5/16	SB204-12	LF204	0.66
SBLF205-14	7/8											SB205-14		
SBLF205-15	15/16	3 3/4	2 63/64	7/16	25/32	25/64	2 17/32	1 3/16	1.062	0.295	5/16	SB205-15	LF205	0.86
SBLF205-16	1											SB205-16		
SBLF206-17	1 1/16											SB206-17		
SBLF206-18	1 1/8	4 7/16	3 9/16	15/32	7/8	15/32	3	1 11/32	1.181	0.315	3/8	SB206-18	LF206	1.23
SBLF206-19	1 3/16											SB206-19		
SBLF206-20	1 1/4											SB206-20		
SBLF207-20	1 1/4											SB207-20		
SBLF207-21	1 5/16	4 13/16	3 15/16	33/64	15/16	15/32	3 1/2	1 7/16	1.259	0.335	3/8	SB207-21	LF207	1.70
SBLF207-22	1 3/8											SB207-22		
SBLF207-23	1 7/16											SB207-23		

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
Ductile Iron Housing * Relubricatable with Anti-Rotation Pin

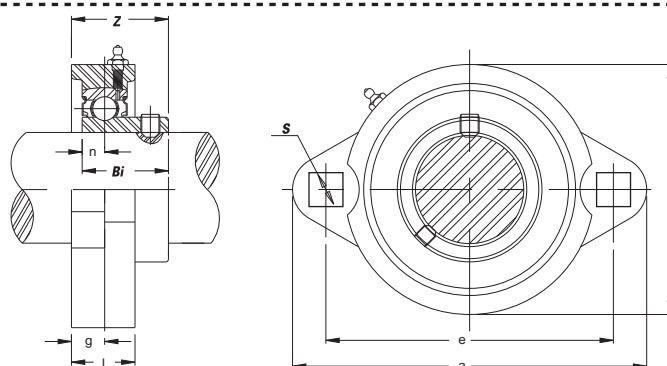


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	g	l	s	b	z	Bi	n				
SBFTD201-8 SBFTD202-10	1/2 5/8	3 1/4	2 9/16	27/64	23/32	9/32	2 9/32	1 7/64	0.866	0.236	1/4	SB201-8 SB202-10	PFTD203	0.51
SBFTD204-12	3/4	3 11/16	2 13/16	7/16	49/64	11/32	2 39/64	1 13/64	0.984	0.275	5/16	SB204-12	PFTD204	0.60
SBFTD205-14 SBFTD205-15 SBFTD205-16	7/8 15/16 1	3 7/8	3	7/16	51/64	11/32	2 23/32	1 17/64	1.062	0.295	5/16	SB205-14 SB205-15 SB205-16	PFTD205	0.84
SBFTD206-17 SBFTD206-18 SBFTD206-19 SBFTD206-20	1 1/16 1 1/8 1 3/16 1 1/4	4 9/16	3 17/32	1/2	55/64	13/32	3 13/64	1 13/32	1.181	0.315	3/8	SB206-17 SB206-18 SB206-19 SB206-20	PFTD206	1.19
SBFTD207-20 SBFTD207-21 SBFTD207-22 SBFTD207-23	1 1/4 1 5/16 1 3/8 1 7/16	4 13/16	3 15/16	1/2	15/16	13/32	3 33/64	1 17/32	1.181	0.315	3/8	SB207-20 SB207-21 SB207-22 SB207-23	PFTD207	1.57

2 Bolt Flange * Wide Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

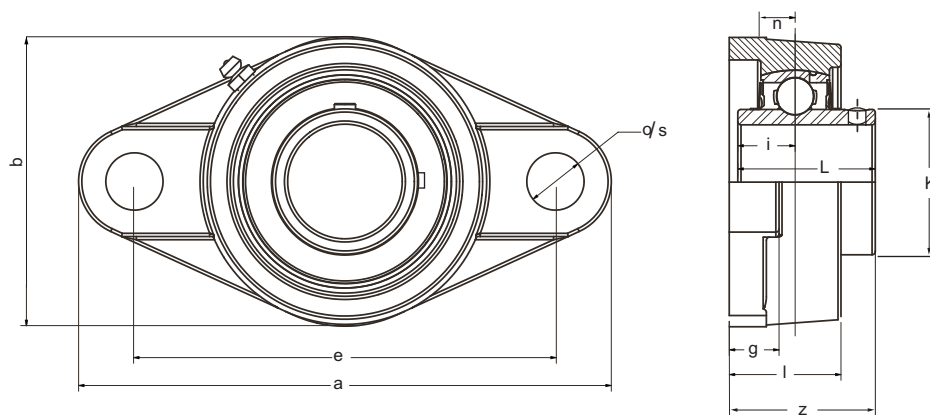


Unit no.	Shaft Dia.		Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	a	e	i	g	l	s	b	z	L	n	K				
HCFT201-8 HCFT202-10	1/2 5/8		13/32	3 1/2	3/4	7/16	1 5/32	13/32	3/8	1 25/32	1.7125	0.6693	1 1/8 1 1/4	5/16	HC201 HC201-8	FT204	1.10 1
HCFT204 HCFT204-12	3/4	20	4 13/32	3 17/32	3/4	7/16	1 5/32	13/32	2 3/8	1 25/32	1.7126	0.6693	1/14	5/16	HC204 HC204-12	FT204	1.37
HCFT205 HCFT205-14 HCFT205-15 HCFT205-16	7/8 15/16 1	25	4 7/8	3 57/64	25/32	17/32	1 7/32	1/2	2 3/4	1 27/32	1.7441	0.6850	1 1/2	3/8	HC205 HC205-14 HC205-15 HC205-16	FT205	1.87
HCFT206 HCFT206-17 HCFT206-18 HCFT206-19 HCFT206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	5 9/16	4 19/32	53/64	17/32	1 11/32	1/2	3 1/4	2	1.9016	0.7166	1 3/4	3/8	HC206 HC206-17 HC206-18 HC206-19 HC206-20	FT206	2.43
HCFT207 HCFT207-20 HCFT207-21 HCFT207-22 HCFT207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	6 1/8	5 1/8	27/32	9/16	1 7/16	35/64	3 3/4	2 1/8	2.0118	0.7402	2 3/16	7/16	HC207 HC207-20 HC207-21 HC207-22 HC207-23	FT207	3.64
HCFT208 HCFT208-24 HCFT208-25	1 1/2 1 9/16	40	6 3/4	5 21/32	15/16	9/16	1 17/32	35/64	4 1/8	2 5/16	2.2165	0.8425	2 3/8	7/16	HC208 HC208-24 HC208-25	FT208	4.63
HCFT209 HCFT209-26 HCFT209-27 HCFT209-28	1 5/8 1 11/16 1 3/4	45	7 1/16	5 27/32	15/16	9/16	1 8/16	5/8	4 3/8	2 5/16	2.2165	0.8425	2 1/2	1/2	HC209 HC209-26 HC209-27 HC209-28	FT209	5.40
HCFT210 HCFT210-30 HCFT210-31 HCFT210-32	1 7/8 1 15/16 2	50	7 7/16	6 3/16	1 1/8	9/16	1 27/32	5/8	4 9/16	2 5/8	2.4685	0.9685	2 3/4	1/2	HC210 HC210-30 HC210-31 HC210-32	FT210	6.39
HCFT211 HCFT211-32 HCFT211-34 HCFT211-35	2 2 1/8 2 3/16	55	8 1/2	7 1/4	1 17/64	13/16	1 31/32	45/64	5 1/4	2 31/32	2.8110	1.0906	3	9/16	HC211 HC211-32 HC211-34 HC211-35	FT211	7.59
HCFT212 HCFT212-36 HCFT212-38 HCFT212-39	2 1/4 2 3/8 2 7/16	60	9 5/16	8	1 3/8	55/64	2 7/64	21/32	5 7/16	3 3/16	3.062	1.2190	3 3/4	9/16	HC212 HC212-36 HC212-38 HC212-39	FT212	8.13

**2 Bolt Flange * Wide Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin**

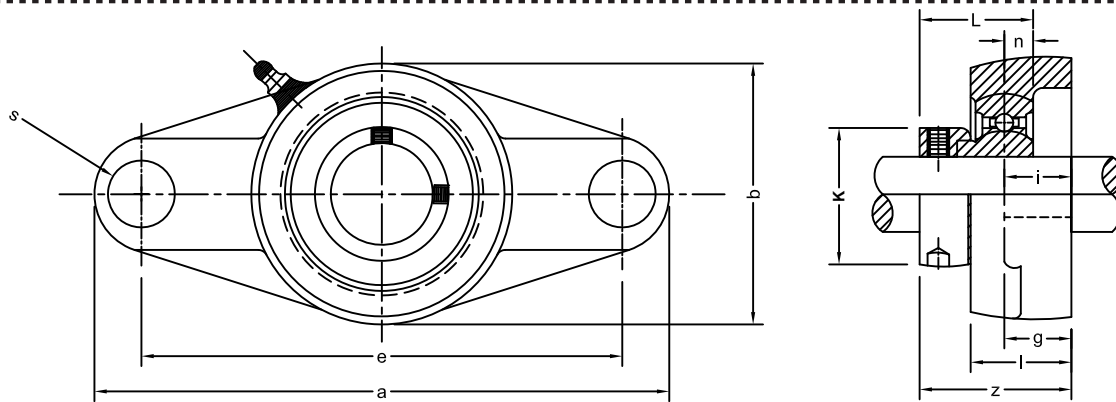


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	b	z	L	n	K				
SAFT201-8 SAFT202-10	1/2 5/8	3 7/8	3	45/64	7/16	1	25/64	2 11/64	1 37/64	1.125	0.256	1 1/2	5/16	SA201-8 SA202-10	FT203	0.85
SAFT204-12	3/4	4 13/16	3 17/32	3/4	7/16	1 5/32	13/32	2 3/8	1 21/32	1.218	0.295	1 1/4	5/16	SA204-12	FT204	1.26
SAFT205-14 SAFT205-15 SAFT205-16	7/8 15/16 1	4 7/8	3 57/64	25/32	17/32	1 7/32	1/2	2 3/4	1 45/64	1.218	0.295	1 1/2	3/8	SA205-14 SA205-15 SA205-16	FT205	1.81
SAFT206-17 SAFT206-18 SAFT206-19 SAFT206-20	1 1/16 1 1/8 1 3/16 1 1/4	5 9/16	4 19/32	53/64	17/32	1 11/32	1/2	3 1/4	1 7/8	1.406	0.354	1 3/4	3/8	SA206-17 SA206-18 SA206-19 SA206-20	FT206	1.81
SAFT207-20 SAFT207-21 SAFT207-22 SAFT207-23	1 1/4 1 5/16 1 3/8 1 7/16	6 1/8	5 1/8	27/32	9/16	1 7/16	35/64	3 3/4	2 1/64	1.531	0.374	2 3/16	7/16	SA207-20 SA207-21 SA207-22 SA207-23	FT207	3.51
SAFT208-24	1 1/2	6 3/4	5 21/32	15/16	9/16	1 17/32	35/64	4 1/8	2 7/32	1.719	0.433	2 3/8	7/16	SA208-24	FT208	4.34
SAFT209-26 SAFT209-27 SAFT209-28	1 5/8 1 11/16 1 3/4	7 1/16	5 27/32	15/16	9/16	1 9/16	5/8	4 3/8	2 5/16	1 23/32	0.433	2 3/4	1/2	SA209-26 SA209-27 SA209-28	FT209	4.51
SAFT210-30 SAFT210-31	1 7/8 1 15/16	7 7/16	6 3/16	1 1/8	9/16	1 27/32	5/8	4 9/16	2 5/8	1 23/32	0.433	2 3/4	1/2	SA210-30 SA210-31	FT210	4.43
SAFT211-32 SAFT211-34 SAFT211-35	2 2 1/8 2 3/16	8 1/2	7 1/4	1 17/64	13/16	1 31/32	45/64	5 1/4	2 31/32	1.3930	0.472	3	9/16	SA211-32 SA211-34 SA211-35	FT211	5.79
SAFT212-36 SAFT212-38 SAFT212-39	2 1/4 2 3/8 2 7/16	9 5/16	7 15/16	1 23/64	13/16	2 3/32	23/32	5 17/36	3 1/4	1 15/16	0.472	3 5/16	9/16	SA212-36 SA212-38 SA212-39	FT212	8.60

2 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

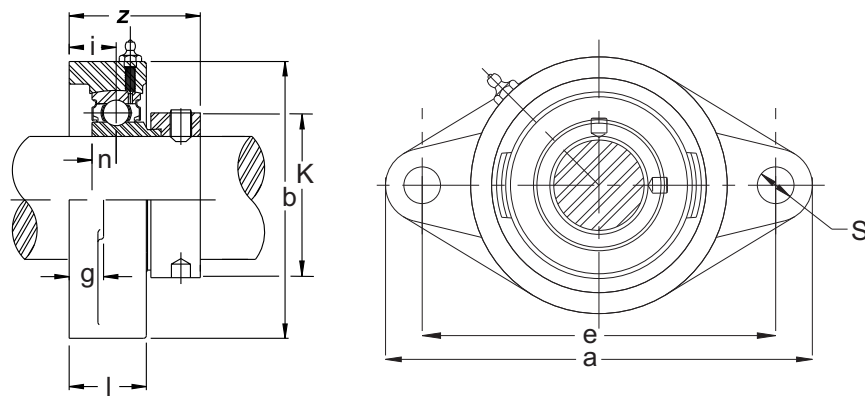


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	b	z	L	n	K				
SAFL201-8	1/2	3 7/8	3	19/32	7/16	1	25/32	2 7/32	1 15/32	1.125	0.256	1.125	5/16	SA201-8	FL203	0.90
SAFL202-10	5/8	4 1/2	3 1/2	19/32	7/16	1	15/32	2 3/8	1 5/16	1.216	0.295	1 1/4	3/8	SA202-10	FL204	1.08
SAFL204-12	3/4	4 7/16	3 5/8	19/32	7/16	1	15/32	2 3/8	1 5/16	1.216	0.295	1 1/4	3/8	SA204-12	FL204	1.08
SAFL205-14	7/8	5 1/8	3 5/8	5/8	1/2	1 1/16	5/8	2 11/16	1 15/32	1.218	0.295	1 1/2	1/2	SA205-14	FL205	1.52
SAFL205-15	15/16	5 1/8	3 5/8	5/8	1/2	1 1/16	5/8	2 11/16	1 15/32	1.218	0.295	1 1/2	1/2	SA205-15		
SAFL205-16	1	5 1/8	3 5/8	5/8	1/2	1 1/16	5/8	2 11/16	1 15/32	1.218	0.295	1 1/2	1/2	SA205-16		
SAFL206-17	1 1/16	5 13/16	4 39/64	45/64	1/2	1 7/32	5/8	3 5/32	1 19/32	1.406	0.354	1 3/4	1/2	SA206-17	FL206	2.14
SAFL206-18	1 1/8													SA206-18		
SAFL206-19	1 3/16													SA206-19		
SAFL206-20	1 1/4													SA206-20		
SAFL207-20	1 1/4	6 11/32	5 1/8	3/4	9/16	1 11/32	5/8	3 17/32	1 3/4	1.531	0.374	2 3/16	1/2	SA207-20	FL207	3.02
SAFL207-21	1 5/16													SA207-21		
SAFL207-22	1 3/8													SA207-22		
SAFL207-23	1 7/16													SA207-23		
SAFL208-24	1 1/2	6 7/8	5 43/64	53/64	9/16	1 13/32	5/8	3 15/16	2 1/64	1.719	0.433	2 3/8	1/2	SA208-24	FL208	3.73

2 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Narrow Base Housing

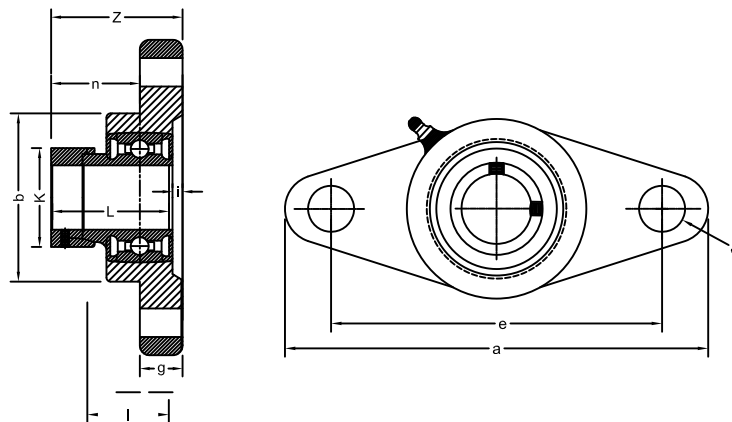


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.
	Inch	a	e	i	g	l	s	b	z	Bi	m	K			
SAFTN201-8	1/2	3 7/8	3	0.448	3/8	23/32	7/16	2 1/8	1.317	1.125	0.256	1 1/8	3/8	SA201-8	FTN203
SAFTN202-10	5/8													SA202-10	
SAFTN204-12	3/4	4 13/32	3 17/32	0.495	7/16	13/16	7/16	2 1/2	1.418	1.218	0.295	1 1/4	3/8	SA204-12	FTN204
SAFTN205-14	7/8													SA205-14	FTN205
SAFTN205-15	15/16	4 7/8	3 57/64	0.483	7/16	13/16	33/64	2 3/4	1.406	1.218	0.295	1 1/2	7/16	SA205-15	
SAFTN205-16	1													SA205-16	
SAFTN206-17	1 1/16													SA206-17	FTN206
SAFTN206-18	1 1/8													SA206-18	
SAFTN206-19	1 3/16	5 9/16	4 19/32	0.478	17/32	61/64	33/64	3 1/8	1.530	1.406	0.354	1 3/4	7/16	SA206-19	
SAFTN206-20	1 1/4													SA206-20	
SAFTN207-20	1 1/4													SA207-20	FTN207
SAFTN207-21	1 5/16													SA207-21	
SAFTN207-22	1 3/8	6 1/8	5 1/8	0.575	19/32	1 3/64	35/64	3 5/8	1.732	1.531	0.374	2 3/16	1/2	SA207-22	
SAFTN207-23	1 7/16													SA207-23	
SAFTN208-24	1 1/2													SA208-24	FTN208
SAFTN208-25	1 9/16	6 3/4	5 21/32	0.610	5/8	1 1/8	35/64	4 1/8	1.896	1.719	0.433	2 3/8	1/2	SA208-25	
SAFTN209-26	1 5/8													SA209-26	FTN209
SAFTN209-27	1 11/16	7 1/16	5 27/32	0.544	5/8	1 1/8	5/8	4 3/8	1.829	1.719	0.433	2 1/2	9/16	SA209-27	
SAFTN209-28	1 3/4													SA209-28	

2 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

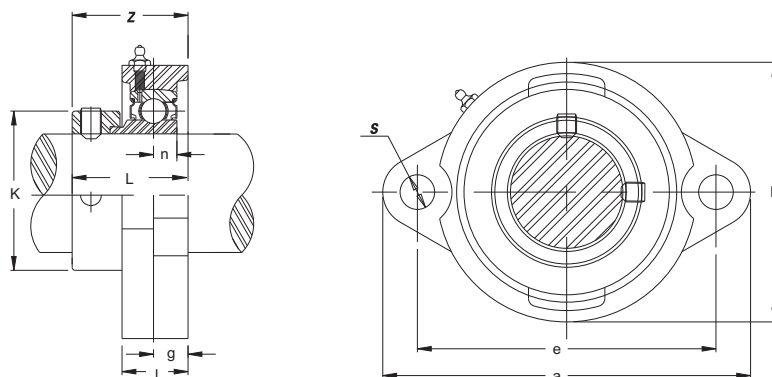


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	g	l	s	b	z	L	n	K				
SALF201-8	1/2	3 3/16	2 1/2	3/8	23/32	5/16	2 7/32	1 1/4	1.125	0.256	1 1/8	1/4	SA201-8	LF203	0.66
SALF202-10	5/8												SA202-10		
SALF204-12	3/4	3 17/32	2 13/16	7/16	25/32	25/54	2 13/32	1 3/8	1.128	0.295	1 1/4	5/16	SA204-12	LF204	0.76
SALF205-14	7/8												SA205-14		
SALF205-15	15/16	3 3/4	2 63/64	7/16	25/32	25/54	2 17/32	1 3/8	1.128	0.295	1 1/2	5/16	SA205-15	LF205	0.97
SALF205-16	1												SA205-16		
SALF206-17	1 1/16												SA206-17		
SALF206-18	1 1/8												SA206-18		
SALF206-19	1 3/16	4 7/16	3 9/16	15/32	7/8	15/32	3	1 17/32	1.406	0.354	1 3/4	3/8	SA206-19	LF206	1.41
SALF206-20	1 1/4												SA206-20		
SALF207-20	1 1/4												SA207-20		
SALF207-21	1 5/16	4 13/16	3 15/16	33/64	15/16	15/32	3 1/2	1 11/16	1.531	0.374	2 3/16	3/8	SA207-21	LF207	2.00
SALF207-22	1 3/8												SA207-22		
SALF207-23	1 7/16												SA207-23		

**2 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
Ductile Iron Housing * Relubricatable with Anti-Rotation Pin**

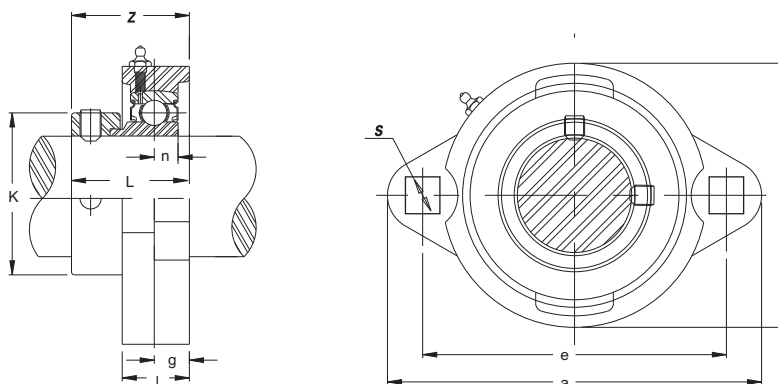


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	g	l	s	b	z	L	n	K				
SAFTD201-8 SAFTD202-10	1/2 5/8	3 3/16	2 9/16	27/64	23/32	9/32	2 9/32	1 21/64	1.125	0.256	1 1/8	1/4	SA201-8 SA202-10	PFTD203	0.57
SAFTD204-12	3/4	3 11/16	2 13/16	7/16	49/64	11/32	2 39/64	1 7/16	1.218	0.295	1 1/4	5/16	SA204-12	PFTD204	0.64
SAFTD205-14 SAFTD205-15 SAFTD205-16	7/8 15/16 1	3 7/8	3	7/16	51/64	11/32	2 23/32	1 27/64	1.218	0.295	1 1/2	5/16	SA205-14 SA205-15 SA205-16	PFTD205	0.88
SAFTD206-17 SAFTD206-18 SAFTD206-19 SAFTD206-20	1 1/16 1 1/8 1 3/16 1 1/4	4 9/16	3 3 17/32	1/2	55/64	11/32	3 13/64	1 41/64	1.405	0.354	1 3/4	3/8	SA206-17 SA206-18 SA206-19 SA206-20	PFTD206	1.32
SAFTD207-20 SAFTD207-21 SAFTD207-22 SAFTD207-23	1 1/4 1 5/16 1 3/8 1 7/16	4 13/16	3 15/16	1/2	15/16	13/32	3 33/64	1 51/64	1.531	0.374	2 3/16	3/8	SA207-20 SA207-21 SA207-22 SA207-23	PFTD207	1.85

4 Bolt Flange * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

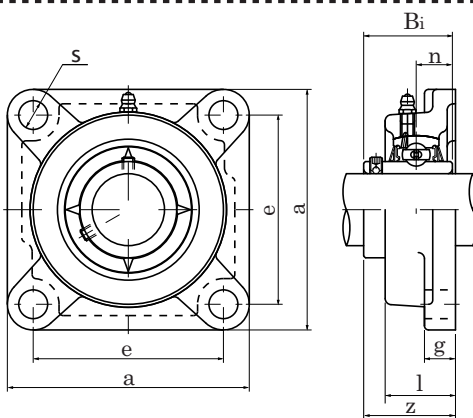


Unit no.	Shaft Dia.		Dimensions (Inch)								Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	a	e	g	l	s	z	Bi	n				
UCF201 UCF201-8 UCF202 UCF202-10 UCF203 UCF203-11 UCF204 UCF204-12	1/2 5/8 11/16 3/4	12 15 17 20										UC201 UC201-8 UC202 UC202-10 UC203 UC203-11 UC204 UC204-12	F204	1.43
UCF205 UCF205-14 UCF205-15 UCF205-16	7/8 15/16 1	25	3 3/4	2 3/4	9/16	1 1/16	15/32	1 13/32	1.3386	0.5630	3/8	UC205 UC205-14 UC205-15 UC205-16	F205	1.87
UCF206 UCF206-17 UCF206-18 UCF206-19 UCF206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	4 1/4	3 17/64	9/16	1 7/32	15/32	1 19/32	1.5000	0.6250	3/8	UC206 UC206-17 UC206-18 UC206-19 UC206-20	F206	2.54
UCF207 UCF207-20 UCF207-21 UCF207-22 UCF207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	4 19/32	3 5/8	5/8	1 11/32	35/64	1 3/4	1.6590	0.6890	7/16	UC207 UC207-20 UC207-21 UC207-22 UC207-23	F207	3.53
UCF208 UCF208-24 UCF208-25	1 1/2 1 9/16	40	5 1/8	4 1/54	5/8	1 13/32	5/8	2 1/64	1.9370	0.7480	1/2	UC208 UC208-24 UC208-25	F208	4.52
UCF209 UCF209-26 UCF209-27 UCF209-28	1 5/8 1 11/16 1 3/4	45	5 13/32	4 9/64	23/32	1 1/2	5/8	2 1/16	1.9370	0.7480	1/2	UC209 UC209-26 UC209-27 UC209-28	F209	5.25
UCF210 UCF210-30 UCF210-31 UCF210-32	1 7/8 1 15/16 2	50	5 5/8	4 3/8	23/32	1 9/16	5/8	2 5/32	2.0315	0.7480	1/2	UC210 UC210-30 UC210-31 UC210-32	F210	5.51
UCF211 UCF211-32 UCF211-34 UCF211-35	2 2 1/8 2 3/16	55	6 3/8	5 1/8	25/32	1 11/16	3/4	2 5/16	2.1890	0.8740	5/8	UC211 UC211-32 UC211-34 UC211-35	F211	7.94
UCF212 UCF212-36 UCF212-37 UCF212-38 UCF212-39	2 1/4 2 5/16 2 3/8 2 7/16	60	6 7/8	5 5/8	25/32	1 7/8	3/4	2 23/32	2.5630	1.00000	5/8	UC212 UC212-36 UC212-37 UC212-38 UC212-39	F212	10.8
UCF213 UCF213-40	2 1/2	65	7 3/8	5 55/64	23/32	1 31/32	3/4	2 3/4	2.5630	1.0000	5/8	UC213 UC213-40	F213	13.0
UCF214 UCF214-43 UCF214-44	2 11/16 2 3/4	70	7 19/32	5 63/64	15/64	2 1/8	3/4	2 31/32	2.9370	1.1890	5/8	UC214 UC214-43 UC214-44	F214	13.9
UCF215 UCF215-46 UCF215-47 UCF215-48	2 7/8 2 15/16 3	75	7 7/8	6 17/64	15/16	2 7/32	3/4	3 3/32	3.0630	1.3110	5/8	UC215 UC215-46 UC215-47 UC215-48	F215	15.0

4 Bolt Flange * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

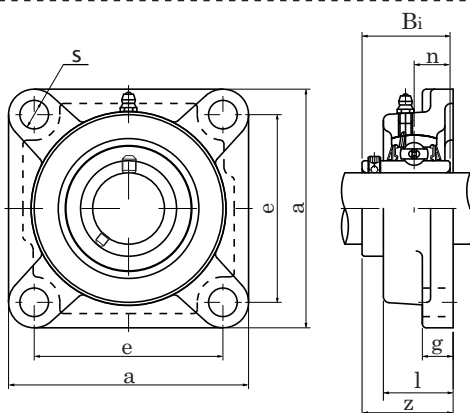


Unit no.	Shaft Dia.		Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	a	e	i	g	l	s	z	Bi	n				
UCFS201 UCFS201-8 UCFS202 UCFS202-10 UCFS203 UCFS203-11 UCFS204 UCFS204-12	1/2 5/8 11/16 3/4	12 15 17 20	3 3/8	2 1/2	0.811	3/8	1 5/16	7/16	1 55/64	1.2205	0.500	3/8	UC201 UC201-8 UC202 UC202-10 UC203 UC203-11 UC204 UC204-12	FS204	1.68
UCFS205 UCFS205-14 UCFS205-15 UCFS205-16	7/8 15/16 1	25	3 3/4	2 3/4	0.827	7/16	1 3/8	29/64	1 57/64	1.3386	0.563	3/8	UC205 UC205-14 UC205-15 UC205-16	FS205	2.77
UCFS206 UCFS206-17 UCFS206-18 UCFS206-19 UCFS206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	4 1/4	3 1/4	0.590	1/2	1 15/32	33/64	2 5/64	1.5000	0.625	7/16	UC206 UC206-17 UC206-18 UC206-19 UC206-20	FS206	3.09
UCFS207 UCFS207-20 UCFS207-21 UCFS207-22 UCFS207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	4 5/8	3 5/8	0.874	1/2	1 1/2	33/64	2 5/32	1.6890	0.689	7/16	UC207 UC207-20 UC207-21 UC207-22 UC207-23	FS207	4.01
UCFS208 UCFS208-24 UCFS208-25	1 1/2 1 9/16	40	5 1/8	4	0.969	5/8	1 5/8	35/64	2 11/32	1.9370	0.748	1/2	UC208 UC208-24 UC208-25	FS208	4.78
UCFS209 UCFS209-26 UCFS209-27 UCFS209-28	1 5/8 1 11/16 1 3/4	45	5 3/8	4 1/8	0.969	5/8	1 21/32	5/8	2 11/32	1.9370	0.748	9/16	UC209 UC209-26 UC209-27 UC209-28	FS209	5.64
UCFS210 UCFS210-30 UCFS210-31 UCFS210-32	1 7/8 1 15/16 2	50	5 5/8	4 3/8	1.094	5/8	1 13/16	5/8	2 19/32	2.0315	0.7480	9/16	UC210 UC210-30 UC210-31 UC210-32	FS210	6.61
UCFS211 UCFS211-32 UCFS211-34 UCFS211-35	2 2 1/8 2 3/16	55	6 3/8	5 1/8	1.220	11/16	1 31/32	43/64	2 15/16	2.1890	0.874	5/8	UC211 UC211-32 UC211-34 UC211-35	FS211	8.62
UCFS212 UCFS212-36 UCFS212-38 UCFS212-39	2 1/4 2 3/8 2 7/16	60	6 7/8	5 5/8	1.343	11/16	2 5/32	43/64	3 3/16	2.5630	1.0000	5/8	UC212 UC212-36 UC212-38 UC212-39	FS212	10.9

4 Bolt Flange * Wide Inner Ring Bearing * Set Screw Locking
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Medium Duty Housing

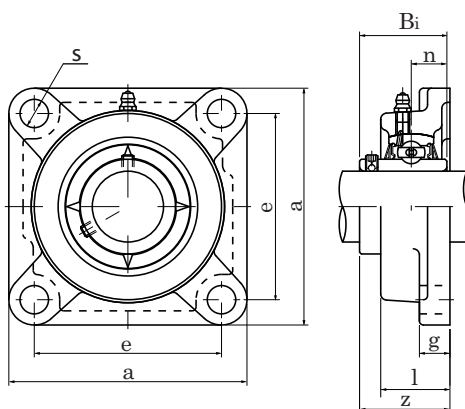


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight Lbs.
	Inch	a	e	g	l	s	b	z	Bi	n				
UCFX05-14	7/8											UCX05-14		
UCFX05-15	15/16	4 1/4	3 17/64	45/64	1/2	1 3/16	15/32	1 19/32	1.5000	0.6259	3/8	UCX05-15	FX05	2.82
UCFX05-16	1											UCX05-16		
UCFX06-18	1 1/8											UCX06-18		
UCFX06-19	1 3/16	4 19/32	3 5/8	3/4	9/16	1 11/32	5/8	1 3/4	1.6890	0.6890	1/2	UCX06-19	FX06	3.64
UCFX06-20	1 1/4											UCX06-20		
UCFX07-20	1 1/4											UCX07-20		
UCFX07-21	1 5/16	5 1/8	4 1/64	53/64	9/16	1 1/2	5/8	2 1/32	1.9370	0.7480	1/2	UCX07-21	FX07	4.07
UCFX07-22	1 3/8											UCX07-22		
UCFX07-23	1 7/16											UCX07-23		
UCFX08-24	1 1/2	5 13/32	4 9/64	55/64	9/16	1 9/16	3/4	2 1/8	1.9370	0.7480	5/8	UCX08-24	FX08	4.74
UCFX08-25	1 9/16											UCX08-25		
UCFX09-26	1 5/8	5 5/8	4 3/8	29/32	9/16	1 9/16	3/4	2 3/16	2.0135	0.7480	5/8	UCX09-26	FX09	5.71
UCFX09-27	1 11/16											UCX09-27		
UCFX09-28	1 3/4											UCX09-28		
UCFX10-30	1 7/8	6 3/8	5 1/8	1 1/32	25/32	1 23/32	3/4	2 11/32	2.1890	0.8740	5/8	UCX10-30	FX10	8.49
UCFX10-31	1 15/16											UCX10-31		
UCFX10-32	2											UCX10-32		
UCFX11-34	2 1/8	6 7/8	5 5/8	1 5/64	25/32	1 15/16	3/4	2 23/32	2.5630	1.0000	5/8	UCX11-34	FX11	11.5
UCFX11-35	2 3/16											UCX11-35		
UCFX11-36	2 1/4											UCX11-36		
UCFX12-38	2 3/8	7 3/8	5 55/64	1 11/32	13/16	2 5/16	3/4	2 29/32	2.5630	1.0000	5/8	UCX12-38	FX12	12.5
UCFX12-39	2 7/16											UCX12-39		
UCFX13-40	2 1/2	7 3/8	5 55/64	1 11/32	13/16	2 5/16	3/4	3 3/32	2.9370	1.1890	5/8	UCX13-40	FX13	13.2
UCFX14-44	2 3/4	7 3/4	5 63/64	1 29/64	7/8	2 3/8	29/32	3 7/32	3.0630	1.3110	3/4	UCX14-44	FX14	16.3
UCFX15-47	2 15/16	7 3/4	5 63/64	1 37/64	15/16	2 11/16	29/32	3 17/32	3.2520	1.3110	3/4	UCX15-47	FX15	18.4
UCFX15-48	3											UCX15-48		

4 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

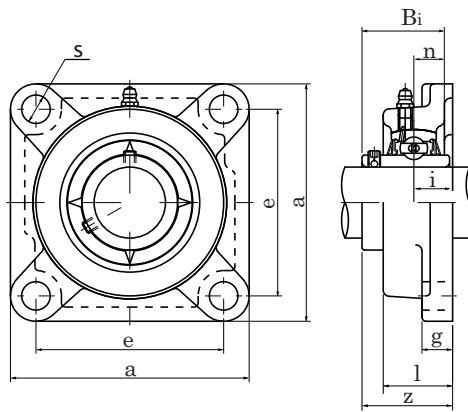


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	z	Bi	n				
SBF201-8 SBF202-10	1/2 5/8	3	2 1/8	21/32	27/64	1	15/32	1 13/64	7/8	0.236	23/32	SB201-8 SB202-10	F203	0.85
SBF204-12	3/4	3 3/8	2 33/64	19/32	15/32	1	15/32	1 5/16	0.984	0.275	3/8	SB204-12	F204	1.37
SBF205-14 SBF205-15 SBF205-16	7/8 15/16 1	3 3/4	2 3/4	5/8	9/16	1 1/16	15/32	1 13/32	1.062	0.295	3/8	SB205-14 SB205-15 SB205-16	F205	1.81
SBF206-17 SBF206-18 SBF206-19 SBF206-20	1 1/16 1 1/8 1 3/16 1 1/4	4 1/4	3 17/64	45/64	9/16	1 7/32	15/32	1 19/32	1.181	0.315	3/8	SB206-17 SB206-18 SB206-19 SB206-20	F206	2.38
SBF207-20 SBF207-21 SBF207-22 SBF207-23	1 1/4 1 5/16 1 3/8 1 7/16	4 19/32	3 5/8	3/4	5/8	1 11/32	35/64	1 11/16	1.259	0.335	7/16	SB207-20 SB207-21 SB207-22 SB207-23	F207	3.33
SBF208-24	1 1/2	5 1/8	4 1/64	53/64	5/8	1 13/32	5/8	1 13/16	1.338	0.354	1/2	SB208-24	F208	4.34

4 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

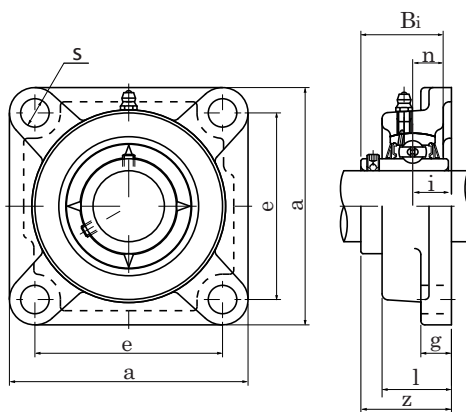


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	z	Bi	n				
SBFS204-12	3/4	3 3/8	2 1/2	0.811	3/8	1 5/16	7/16	1 33/64	0.984	0.275	3/8	SB204-12	FS204	1.61
SBFS205-14	7/8	3 3/4	2 3/4	0.827	7/16	1 3/8	29/64	1 19/32	1.062	0.295	3/8	SB205-14	FS205	2.21
SBFS205-15	15/16											SB205-15		
SBFS205-16	1											SB205-16		
SBFS206-17	1 1/16	4 1/4	3 1/4	0.890	1/2	1 15/32	33/64	1 49/64	1.181	0.315	7/16	SB206-17	FS206	2.93
SBFS206-18	1 1/8											SB206-18		
SBFS206-19	1 3/16											SB206-19		
SBFS206-20	1 1/4											SB206-20		
SBFS207-20	1 1/4	4 5/8	3 5/8	0.874	1/2	1 1/2	33/64	1 13/16	1.259	0.335	7/16	SB207-20	FS207	3.81
SBFS207-21	1 5/16											SB207-21		
SBFS207-22	1 3/8											SB207-22		
SBFS207-23	1 7/16											SB207-23		
SBFS208-24	1 1/2	5 1/8	4	0.969	5/8	1 5/8	35/64	1 61/64	1.338	0.354	1/2	SB208-24	FS208	4.51

**4 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
Narrow Base Housing**

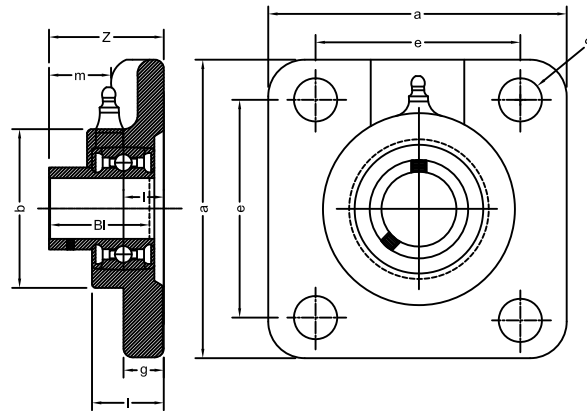


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.
	Inch	a	e	i	g	l	s	b	z	Bi	m			
SBFN201-8 SBFN202-10	1/2 5/8	3	2 1/8	0.448	3/8	23/32	7/16	2 1/8	1.078	0.866	0.630	3/8	SB201-8 SB202-10	FN203
SBFN204-12	3/4	3 3/8	2 1/2	0.495	7/16	13/16	7/16	2 1/2	1.203	0.984	0.706	3/8	SB204-12	FN204
SBFN205-14 SBFN205-15 SBFN205-16	7/8 15/16 1	3 3/4	2 3/4	0.483	7/16	13/16	33/64	2 3/4	1.250	1.062	0.767	7/16	SB205-14 SB205-15 SB205-16	FN205
SBFN206-17 SBFN206-18 SBFN206-19 SBFN206-20	1 1/16 1 1/8 1 3/16 1 1/4	4 1/4	3 1/4	0.478	17/32	61/64	33/64	3 1/8	1.344	1.181	0.866	7/16	SB206-17 SB206-18 SB206-19 SB206-20	FN206
SBFN207-20 SBFN207-21 SBFN207-22 SBFN207-23	1 1/4 1 5/16 1 3/8 1 7/16	4 5/8	3 5/8	0.575	19/32	1 3/64	35/64	3 5/8	1.500	1.259	0.925	1/2	SB207-20 SB207-21 SB207-22 SB207-23	FN207
SBFN208-24 SBFN208-25	1 1/2 1 9/16	5 1/8	4	0.610	5/8	1 1/8	35/64	4 1/8	1.594	1.338	0.984	1/2	SB208-24 SB208-25	FN208
SBFN209-26 SBFN209-27 SBFN209-28	1 5/8 1 11/16 1 3/4	5 3/8	4 1/8	0.544	5/8	1 1/8	5/8	4 3/8	1.610	1.439	1.066	9/16	SB209-26 SB209-27 SB209-28	FN209

4 Bolt Flange * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

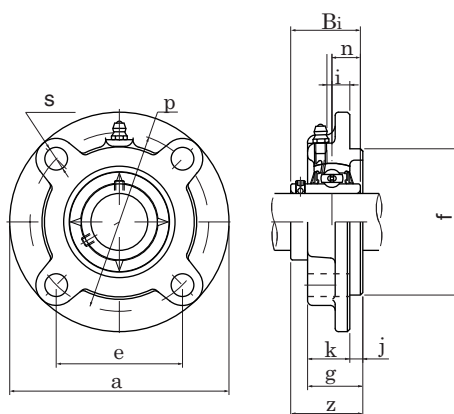


Unit no.	Shaft Dia.	Dimensions (Inch)												Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	p	e	i	s	j	k	g	f	z	Bi	n				
UCFC201-8	1/2													3/8	UC201-8	FC204	1.85
UCFC202-10	5/8	3 15/16	3 5/64	2 11/64	25/64	15/32	13/64	9/32	13/16	2.4409	1 5/16	1.2206	0.5000		UC202-10		
UCFC204-12	3/4														UC204-12		
UCFC205-14	7/8													3/8	UC205-14	FC205	2.21
UCFC205-15	15/16	4 17/32	3 35/64	2 1/2	25/64	15/32	15/64	9/32	53/64	2.7550	1 5/32	1.3386	0.5630		UC205-15		
UCFC205-16	1														UC205-16		
UCFC206-17	1 1/16													3/8	UC206-17	FC206	3.22
UCFC206-18	1 1/8	4 29/32	3 15/16	2 25/32	25/64	15/32	5/16	5/16	29/32	3.1496	1 9/32	1.5000	0.6260		UC206-18		
UCFC206-19	1 3/16														UC206-19		
UCFC206-20	1 1/4														UC206-20		
UCFC207-20	1 1/4													7/16	UC207-20	FC207	1.06
UCFC207-21	1 5/16	5 5/16	4 23/64	3 1/15	7/16	35/64	5/16	11/32	1 1/32	3.5433	1 7/16	1.6890	0.6890		UC207-21		
UCFC207-22	1 3/8														UC207-22		
UCFC207-23	1 7/16														UC207-23		
UCFC208-24	1 1/2													7/16	UC208-24	FC208	5.03
UCFC208-25	1 9/16	5 23/32	4 23/32	3 11/32	7/16	35/64	25/64	11/32	1 1/32	3.8370	1 5/8	1.9370	0.7480		UC208-25		
UCFC209-26	1 5/8													1/2	UC209-26	FC209	6.53
UCFC209-27	1 11/16	6 5/16	5 13/64	3 43/64	25/64	5/8	15/32	9/16	1 1/32	4.1330	1 19/32	1.9370	0.7480		UC209-27		
UCFC209-28	1 3/4														UC209-28		
UCFC210-30	1 7/8													1/2	UC210-30	FC210	6.79
UCFC210-31	1 15/16	6 1/2	5 7/16	3 27/32	25/64	5/8	15/32	9/16	1 7/64	4.3307	1 11/16	2.0315	0.7480		UC210-31		
UCFC210-32	2														UC210-32		
UCFC211-32	2													5/8	UC211-32	FC211	8.56
UCFC211-34	2 1/8	7 9/32	5 29/32	4 11/64	33/64	3/4	15/32	19/32	1 7/32	4.9213	1 13/16	2.1890	0.8740		UC211-34		
UCFC211-35	2 3/15														UC211-35		
UCFC212-36	2 1/4													5/8	UC212-36	FC212	12.0
UCFC212-38	2 3/8	7 11/16	6 19/64	4 29/64	43/64	3/4	15/32	19/32	1 27/64	5.3150	2 7/32	2.5630	1.0000		UC212-38		
UCFC212-39	2 7/16														UC212-39		
UCFC213-40	2 1/2	8 1/16	6 11/16	4 47/64	5/8	3/4	35/64	19/32	1 27/64	5.7087	2 3/16	2.5630	1.0000	5/8	UC213-40	FC213	13.0

4 Bolt Flange * Wide Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

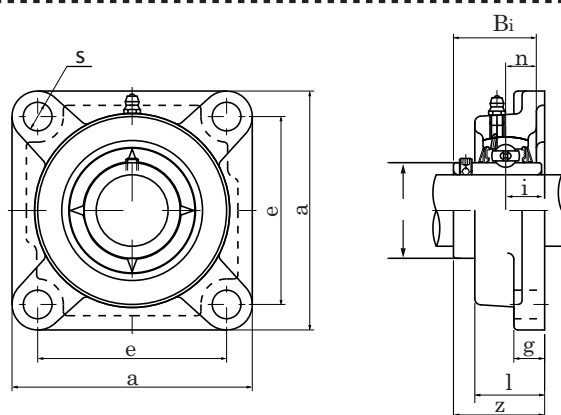


Unit no.	Shaft Dia.		Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	a	e	i	g	l	s	z	L	n	K				
HCFS204 HCFS204-12	3/4	20	3 3/8	2 1/2	0.811	3/8	1 5/16	7/16	1 55/64	1.7126	0.6690	1 1/4	3/8	HC204 HC204-12	FS204	1.76
HCFS205 HCFS205-14 HCFS205-15 HCFS205-16	7/8 15/16 1	25	3-3/4	2 3/4	0.827	7/16	1 3/8	29/64	1 57/64	1.7441	0.6850	1 1/2	3/8	HC205 HC205-14 HC205-15 HC205-16	FS205	2.32
HCFS206 HCFS206-17 HCFS206-18 HCFS206-19 HCFS206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	4 1/4	3 1/4	0.890	1/2	1 15/32	33/64	2 5/64	1.9016	0.7185	1 3/4	7/16	HC206 HC206-17 HC206-18 HC206-19 HC206-20	FS206	3.20
HCFS207 HCFS207-20 HCFS207-21 HCFS207-22 HCFS207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	4 5/8	3 5/8	0.674	1/2	1 1/2	33/64	2 5/32	2.0118	0.7402	2 3/16	7/16	HC207 HC207-20 HC207-21 HC207-22 HC207-23	FS207	4.19
HCFS208 HCFS208-24 HCFS208-25	1 1/2 1 9/16	40	5 1/8	4	0.069	5/8	1 5/8	35/64	2 11/32	2.2165	0.8425	2 3/8	1/2	HC208 HC208-24 HC208-25	FS208	5.07
HCFS209 HCFS209-26 HCFS209-27 HCFS209-28	1 5/8 1 11/16 1 3/4	45	5 3/8	4 1/8	0.959	5/8	1 21/32	5/8	2 11/32	2.2165	0.8425	2 1/2	9/16	HC209 HC209-26 HC209-27 HC209-28	FS209	5.05
HCFS210 HCFS210-30 HCFS210-31 HCFS210-32	1 7/8 1 15/16 2	50	5 5/8	4 3/8	1.094	5/8	1 13/16	5/8	2 19/32	2.4685	0.9685	2 3/4	9/16	HC210 HC210-30 HC210-31 HC210-32	FS210	7.06
HCFS211 HCFS211-32 HCFS211-34 HCFS211-35	2 2 1/8 2 3/16	55	6 3/8	5 1/8	1.220	11/16	1 31/32	43/64	2 15/16	2.8110	1.0906	3	5/8	HC211 HC211-32 HC211-34 HC211-35	FS211	9.26
HCFS212 HCFS212-36 HCFS212-38 HCFS212-39	2 1/4 2 3/8 2 7/16	60	6 7/8	5 5/8	1.343	11/16	2 5/32	43/64	3 3/16	3.0630	1.2165	3 5/16	5/8	HC212 HC212-36 HC212-38 HC212-39	FS212	11.7

4 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

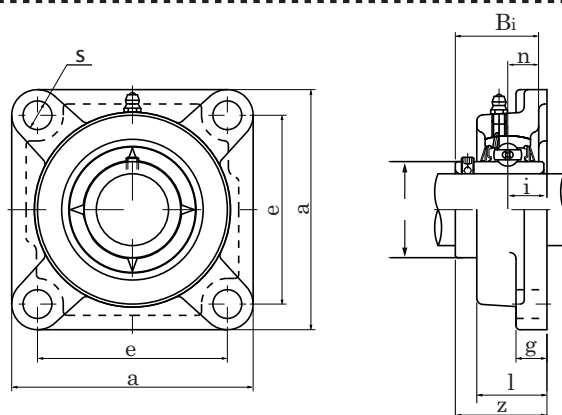


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	z	L	n	K				
SAF201-08	1/2	3	2 1/8	21/32	27/64	1	15/32	1 1/2	1 1/8	0.256	1 1/8	3/8	SA201-8	F203	0.93
SAF202-10	5/8												SA202-10		
SAF204-12	3/4	3 3/8	2 33/64	19/32	15/32	1	15/32	1 17/32	1.218	0.295	1 1/4	3/8	SA204-12	F204	1.41
SAF205-14	7/8												SA205-14		
SAF205-15	15/16	3 3/4	2 3/4	5/8	9/16	1 1/16	15/32	1 9/16	1.218	0.295	1 1/2	3/8	SA205-15	F205	1.85
SAF205-16	1												SA205-16		
SAF206-17	1 1/16												SA206-17		
SAF206-18	1 1/8	4 1/4	3 17/64	45/64	9/16	1 7/32	15/32	1 49/64	1.406	0.354	1 3/4	3/8	SA206-18	F206	2.51
SAF206-19	1 3/16												SA206-19		
SAF206-20	1 1/4												SA206-20		
SAF207-20	1 1/4												SA207-20		
SAF207-21	1 5/16	4 19/32	3 5/8	3/4	5/8	1 11/32	35/64	1 59/64	1.631	0.374	2 3/16	7/16	SA207-21	F207	3.57
SAF207-22	1 3/8												SA207-22		
SAF207-23	1 7/16												SA207-23		
SAF208-24	1 1/2	5 1/8	4 1/64	53/64	5/8	1 13/32	5/8	2 1/8	1.719	0.433	2 3/8	1/2	SA208-24	F208	4.52

4 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

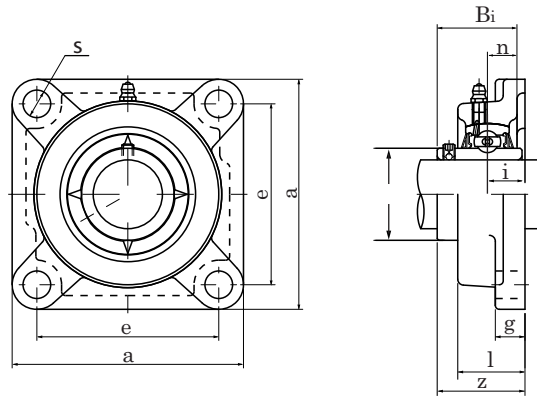


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	s	z	L	n	K				
SAFS204-12	3/4	3 3/8	2 1/2	0.811	3/8	7/16	1 47/64	1.218	0.295	1 1/4	3/8	SA204-12	FS204	1.65
SAFS205-14	7/8	3 3/4	2 3/4	0.827	7/16	29/64	1 3/4	1.218	0.295	1 1/2	3/8	SA205-14	FS205	2.25
SAFS205-15	15/16											SA205-15		
SAFS205-16	1											SA205-16		
SAFS206-17	1 1/16	4 1/4	3 1/4	0.890	1/2	33/64	1 61/64	1.406	0.354	1 3/4	7/16	SA206-17	FS206	3.06
SAFS206-18	1 1/8											SA206-18		
SAFS206-19	1 3/16											SA206-19		
SAFS206-20	1 1/4											SA206-20		
SAFS207-20	1 1/4	4 5/8	3 5/8	0.874	1/2	33/64	2 3/64	1.531	0.374	2 3/16	7/16	SA207-20	FS207	4.06
SAFS207-21	1 5/16											SA207-21		
SAFS207-22	1 3/8											SA207-22		
SAFS207-23	1 7/16											SA207-23		
SAFS208-24	1 1/2	5 1/8	4	0.969	5/8	35/64	2 1/4	1.719	0.433	2 3/8	1/2	SA208-24	FS208	4.78

4 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
 High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
 Narrow Base Housing

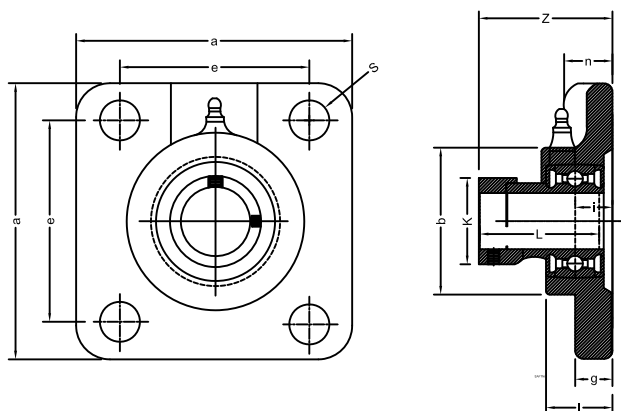


Unit no.	Shaft Dia.	Dimensions (Inch)											Bolt Size Inch	Bearing No.	Housing No.
	Inch	a	e	i	g	l	s	b	z	L	n	K			
SAFN201-8 SAFN202-10	1/2 5/8	3	2 1/8	0.448	3/8	23/32	7/16	2 1/8	1.317	1.125	0.256	1 1/8	3/8	SA201-8 SA202-10	FN203
SAFN204-12	3/4	3 3/8	2 1/2	0.495	7/16	13/16	7/16	2 1/2	1.418	1.218	0.295	1 1/4	3/8	SA204-12	FN204
SAFN205-14 SAFN205-15 SAFN205-16	7/8 15/16 1	3 3/4	2 3/4	0.483	7/16	13/16	33/64	2 3/4	1.406	1.218	0.295	1 1/2	7/16	SA205-14 SA205-15 SA205-16	FN205
SAFN206-17 SAFN206-18 SAFN206-19 SAFN206-20	1 1/16 1 1/8 1 3/16 1 1/4	4 1/4	3 1/4	0.478	17/32	61/64	33/64	3 1/8	1.530	1.406	0.354	1 3/4	7/16	SA206-17 SA206-18 SA206-19 SA206-20	FN206
SAFN207-20 SAFN207-21 SAFN207-22 SAFN207-23	1 1/4 1 5/16 1 3/8 1 7/16	4 5/8	3 5/8	0.575	19/32	1 3/64	35/64	3 5/8	1.732	1.531	0.374	2 3/16	1/2	SA207-20 SA207-21 SA207-22 SA207-23	FN207
SAFN208-24 SAFN208-25	1 1/2 1 9/16	5 1/8	4	0.610	5/8	1 1/8	35/64	4 1/8	1.896	1.719	0.433	2 3/8	1/2	SA208-24 SA208-25	FN208
SAFN209-26 SAFN209-27 SAFN209-28	1 5/8 1 11/16 1 3/4	5 3/8	4 1/8	0.544	5/8	1 1/8	5/8	4 3/8	1.829	1.719	0.433	2 1/2	9/16	SA209-26 SA209-27 SA209-28	FN209

**3 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
Ductile Iron Housing * Relubricatable with Anti-Rotation Pin**

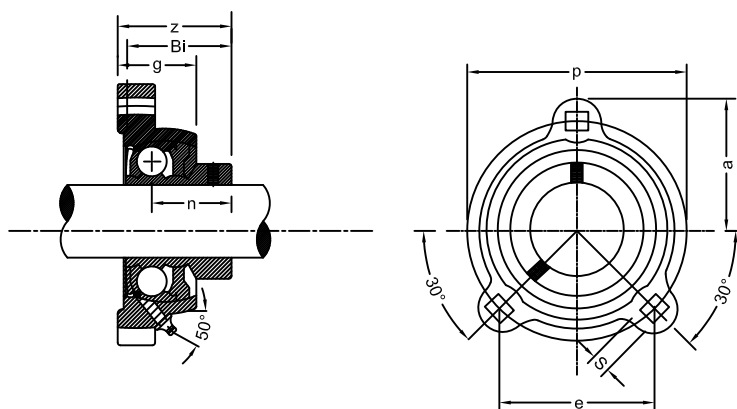


Unit no.	Shaft Dia.	Dimensions (Inch)								Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	p	e	g	z	S	Bi	n				
SBFCT201-8	1/2	1 19/32	2 1/2	2.165	11/16	1 1/64	9/32	0.8661	0.236	1/4	SB201-8	FCT203	0.46
SBFCT202-10	5/8	1 19/32	2 1/2	2.165	11/16	1 1/64	9/32	0.8661	0.236	1/4	SB202-10	FCT203	0.46
SBFCT204-12	3/4	1 25/32	2 13/16	2.436	25/32	1 9/64	11/32	0.9843	0.275	5/16	SB204-12	FCT204	0.71
SBFCT205-14	7/8	1 7/8	3	2.598	25/32	1 11/64	11/32	1.0630	0.295	5/16	SB205-14	FCT205	0.82
SBFCT205-15	15/16	1 7/8	3	2.598	25/32	1 11/64	11/32	1.0630	0.295	5/16	SB205-15	FCT205	0.82
SBFCT205-16	1	1 7/8	3	2.598	25/32	1 11/64	11/32	1.0630	0.295	5/16	SB205-16	FCT205	0.82
SBFCT206-17	1 1/16	2 7/32	3 9/16	3.085	7/8	1 11/32	13/32	1.1811	0.315	3/8	SB206-17	FCT206	0.73
SBFCT206-18	1 1/8	2 7/32	3 9/16	3.085	7/8	1 11/32	13/32	1.1811	0.315	3/8	SB206-18	FCT206	0.73
SBFCT206-19	1 3/16	2 7/32	3 9/16	3.085	7/8	1 11/32	13/32	1.1811	0.315	3/8	SB206-19	FCT206	0.73
SBFCT206-20	1 1/4	2 7/32	3 9/16	3.085	7/8	1 11/32	13/32	1.1811	0.315	3/8	SB206-20	FCT206	0.73
SBFCT207-20	1 1/4	2 13/32	3 15/16	3.410	15/16	1 7/16	13/32	1.2598	0.335	3/8	SB207-20	FCT207	1.57
SBFCT207-21	1 5/16	2 13/32	3 15/16	3.410	15/16	1 7/16	13/32	1.2598	0.335	3/8	SB207-21	FCT207	1.57
SBFCT207-22	1 3/8	2 13/32	3 15/16	3.410	15/16	1 7/16	13/32	1.2598	0.335	3/8	SB207-22	FCT207	1.57
SBFCT207-23	1 7/16	2 13/32	3 15/16	3.410	15/16	1 7/16	13/32	1.2598	0.335	3/8	SB207-23	FCT207	1.57

3 Bolt Flange * Narrow Inner Ring Bearing * Eccentric Locking Collar
Ductile Iron Housing * Relubricatable with Anti-Rotation Pin

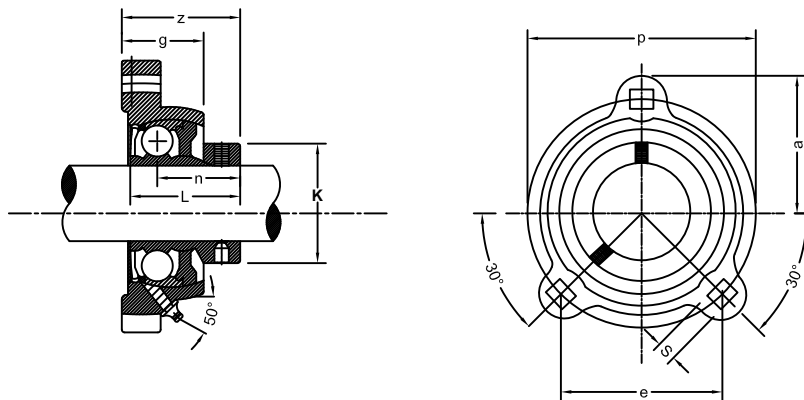


Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	p	e	g	z	S	L	n	K				
SAFCT201-8 SAFCT202-10	1/2 5/8	1 19/32	2 1/2	2.165	11/16	1 1/4	9/32	1.125	0.256	1 1/8	1/4	SA201-8 SA202-10	FCT203	0.57
SAFCT204-12	3/4	1 25/32	2 13/16	2.436	25/32	1 11/32	11/32	1.218	0.295	1 1/4	5/16	SA204-12	FCT204	0.75
SAFCT205-14 SAFCT205-15 SAFCT205-16	7/8 15/16 1	1 7/8	3	2.598	25/32	1 11/64	11/32	1.218	0.295	1 1/2	5/16	SA205-14 SA205-15 SA205-16	FCT205	0.86
SAFCT206-17 SAFCT206-18 SAFCT206-19 SAFCT206-20	1 1/16 1 1/8 1 3/16 1 1/4	2 7/32	3 9/16	3.085	7/8	1 17/32	13/32	1.406	0.354	1 3/4	3/8	SA206-17 SA206-18 SA206-19 SA206-20	FCT206	1.35
SAFCT207-20 SAFCT207-21 SAFCT207-22 SAFCT207-23	1 1/4 1 5/16 1 3/8 1 7/16	2 13/32	3 15/16	3.410	15/16	1 21/32	13/32	1.531	0.374	2 3/16	3/8	SA207-20 SA207-21 SA207-22 SA207-23	FCT207	1.81

Threaded Base * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

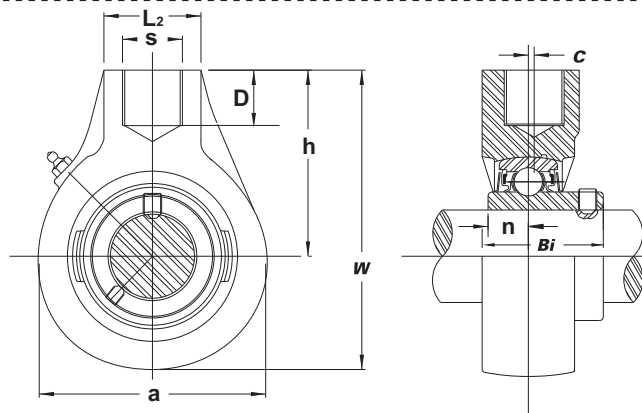


Unit no.	Shaft Dia.	Dimensions (Inch)									Bearing No.	Housing No.	Weight Lbs.
	Inch	a	w	c	h	L2	D	s	Bi	n			
UCSH201-8	1/2										UC201-8		
UCSH202-10	5/8	2 17/32	3 25/32	0	2 23/64	1 9/16	3/4	PF 3/4	1.2205	0.5000	UC202-10	SH204	1.63
UCSH204-12	3/4										UC204-12		
UCSH205-14	7/8										UC205-14		
UCSH205-15	15/16	3 1/16	4 1/16	0	2 23/64	1 9/16	3/4	PF 3/4	1.3366	0.5630	UC205-15	SH205	2.0
UCSH205-16	1										UC205-16		
UCSH206-17	1 1/16										UC206-17		
UCSH206-18	1 1/8	3 1/16	4 1/16	0	2 23/64	1 9/16	3/4	PF 3/4	1.5000	0.6260	UC206-18	SH206	2.16
UCSH206-19	1 3/16										UC206-19		
UCSH206-20	1 1/4										UC206-20		
UCSH207-20	1 1/4										UC207-20		
UCSH207-21	1 5/16	3 5/8	4 9/16	0	2 3/4	1 9/16	3/4	PF 3/4	1.6890	0.6890	UC207-21	SH207	2.67
UCSH207-22	1 3/8										UC207-22		
UCSH207-23	1 7/16										UC207-23		
UCSH208-24	1 1/2	3 25/32	4 3/4	5/64	2 7/8	1 9/16	3/4	PF 3/4	1.9370	0.7480	UC208-24	SH208	3.68
UCSH208-25	1 9/16										UC208-25		
UCSH209-26	1 5/8										UC209-26		
UCSH209-27	1 11/16	4 1/4	5 11/32	13/64	3 15/64	1 7/8	13/16	PF 3/4	1.9370	0.7480	UC209-27	SH209	4.59
UCSH209-28	1 3/4										UC209-28		
UCSH210-30	1 7/8										UC210-30		
UCSH210-31	1 15/16	4 21/32	5 19/32	13/64	3 17/64	1 7/8	13/16	PF 3/4	2.0315	0.7480	UC210-31	SH210	5.49
UCSH210-32	2										UC210-32		

Wide Slot * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

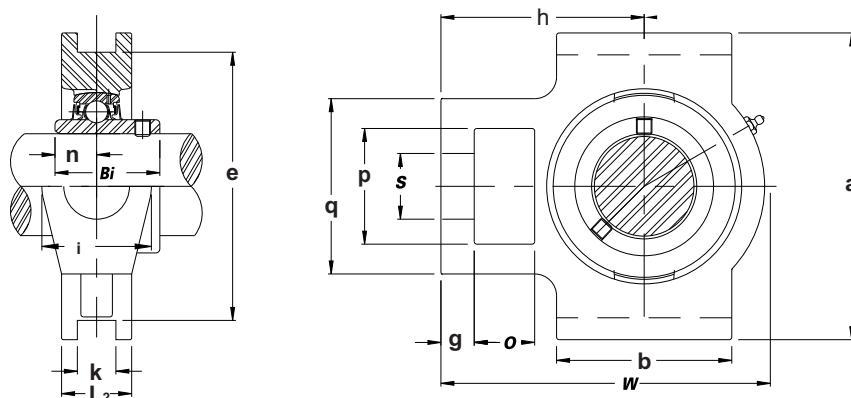


Unit no.	Shaft Dia.		Dimensions (Inch)															Bearing No.	Housing No.	Weight lbs.
	Inch	mm	o	g	q	p	s	b	k	e	a	w	j	L2	h	Bi	n			
UCST201		12																UC201		
UCST201-8	1/2	15																UC201-8		
UCST202		17	5/8	3/8	2	1 1/4	3/4	2	17/32	3	3 1/2	3 11/16	1 1/4	15/16	2 3/8	1.2205	0.5000	UC202	ST204	1.76
UCST202-10	5/8	20																UC202-10		
UCST203		20																UC203		
UCST203-11	11/16																	UC203-11		
UCST204		25																UC204		
UCST204-12	3/4																	UC204-12		
UCST205		30																UC205		
UCST205-14	7/8		5/8	3/8	2	1 1/4	7/8	2	17/32	3	3 1/2	3 13/16	1 1/4	15/16	2 7/16	1.3386	0.5630	UC205-14	ST205	1.90
UCST205-15	15/16																	UC205-15		
UCST205-16	1																	UC205-16		
UCST206		35																UC206		
UCST206-17	1 1/16		5/8	3/8	2 3/16	1 7/16	7/8	2 1/4	17/32	3 1/2	4	4 7/16	1 7/16	15/16	2 3/4	1.5000	0.6200	UC206-17	ST206	2.82
UCST206-18	1 1/8																	UC206-18		
UCST206-19	1 3/16																	UC206-19		
UCST206-20	1 1/4																	UC206-20		
UCST207		40																UC207		
UCST207-20	1 1/4		5/8	1/2	2 1/2	1 7/16	7/8	2 1/2	17/32	3 1/2	4	5 1/16	1 7/16	1 3/16	3 1/16	1.6890	0.6890	UC207-20	ST207	3.70
UCST207-21	1 5/16																	UC207-21		
UCST207-22	1 3/8																	UC207-22		
UCST207-23	1 7/16																	UC207-23		
UCST208		45																UC208		
UCST208-24	1 1/2		3/4	5/8	3 1/4	1 15/16	1 1/8	3 1/4	11/16	4	4 1/2	5 11/16	1 15/16	1 3/8	3 1/2	1.9370	0.7480	UC208-24	ST208	5.34
UCST208-25	1 9/16																	UC208-25		
UCST209		50																UC209		
UCST209-26	1 5/8		3/4	5/8	3 1/4	1 15/16	1 1/8	3 1/4	11/16	4	4 5/8	5 11/16	1 15/16	1 3/8	3 7/16	1.9370	0.7480	UC209-26	ST209	5.56
UCST209-27	1 11/16																	UC209-27		
UCST209-28	1 3/4																	UC209-28		
UCST210		55																UC210		
UCST210-30	1 7/8		3/4	5/8	3 1/4	1 15/16	1 1/8	3 1/4	11/16	4	4 5/8	5 7/8	1 15/16	1 3/8	3 9/16	2.0315	0.7480	UC210-30	ST210	6.06
UCST210-31	1 15/16																	UC210-31		
UCST210-32	2																	UC210-32		
UCST211		60																UC211		
UCST211-32	2		1	3/4	4	2 1/2	1 3/8	3 3/4	1 1/16	5 1/8	5 3/4	6 3/4	2 1/2	1 5/8	4 3/16	2.1890	0.8740	UC211-32	ST211	9.04
UCST211-34	2 1/8																	UC211-34		
UCST211-35	2 3/16																	UC211-35		
UCST212		65																UC212		
UCST212-36	2 1/4		1 1/4	3/4	4	2 1/2	1 3/8	4	1 1/16	5 1/8	5 3/4	7 5/8	2 1/2	1 13/16	4 11/16	2.5630	1.0000	UC212-36	ST212	11.5
UCST212-38	2 3/8																	UC212-38		
UCST212-39	2 7/16																	UC212-39		
UCST213																		UC213		
UCST213-40	2 1/2		1 1/4	13/16	4 3/8	2 3/4	1 5/8	4 3/4	1 1/16	5 15/16	6 9/16	8 13/16	2 3/4	2	5 3/8	2.5630	1.0000	UC213-40	ST213	15.5

**Wide Slot * Wide Inner Ring Bearing * Eccentric Locking Collar
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin**

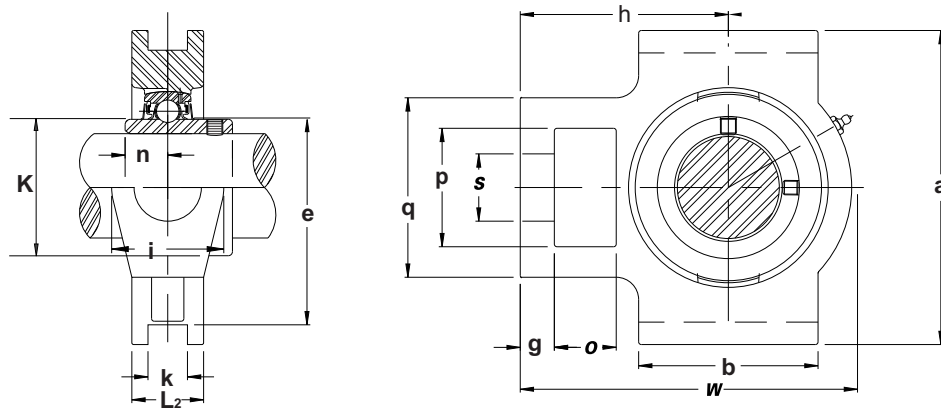

Unit no.	Shaft Dia.		Dimensions (Inch)																Bearing No.	Housing No.	Weight lbs.
	Inch	mm	o	g	q	p	s	b	k	e	a	w	j	L ₂	h	L	n	K			
HCST204 HCST204-12	3/4	20	5/8	3/8	2	1 1/4	3/4	2	17/32	3	3 1/2	3 11/16	1 1/4	15/16	2 3/8	1.720	0.673	1 1/4	HC204 HC204-12	ST204	1.85
HCST205 HCST205-14 HCST205-15 HCST205-16	7/8 15/16 1	25	5/8	3/8	2	1 1/4	7/8	2	17/32	3	3 1/2	3 13/16	1 1/4	15/16	2 7/16	1.748	0.688	1 1/2	HC205 HC205-14 HC205-15 HC205-16	ST205	1.94
HCST206 HCST206-17 HCST206-18 HCST206-19 HCST206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	5/8	3/8	2 3/16	1 7/16	7/8	2 1/4	17/32	3 1/2	4	4 7/16	1 7/16	15/16	2 3/4	1.905	0.730	1 3/4	HC206 HC206-17 HC206-18 HC206-19 HC206-20	ST206	2.90
HCST207 HCST207-20 HCST207-21 HCST207-22 HCST207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	5/8	1/2	2 1/2	1 7/16	7/8	2 1/2	17/32	3 1/2	4	5 1/16	1 7/16	1 3/16	3 1/16	2.016	0.742	2 3/16	HC207 HC207-20 HC207-21 HC207-22 HC207-23	ST207	3.68
HCST208 HCST208-24 HCST208-25	1 1/2 1 9/16	40	3/4	5/8	3 1/4	1 15/16	1 1/8	3 1/4	11/16	4	4 1/2	5 11/16	1 15/16	1 3/8	3 1/2	2.220	0.814	2 3/8	HC208 HC208-24 HC208-25	ST208	5.62
HCST209 HCST209-26 HCST209-27 HCST209-28	1 5/8 1 11/16 1 3/4	45	3/4	5/8	3 1/4	1 15/16	1 1/8	3 1/4	11/16	4	4 5/8	5 11/16	1 15/16	1 3/8	3 7/16	2.220	0.844	2 1/2	HC209 HC209-26 HC209-27 HC209-28	ST209	5.84
HCST210 HCST210-30 HCST210-31 HCST210-32	1 7/8 1 15/16 2	50	3/4	5/8	3 1/4	1 15/16	1 1/8	3 3/8	11/16	4	4 5/8	5 7/8	1 15/16	1 3/8	3 9/16	2.458	0.969	2 3/4	HC210 HC210-30 HC210-31 HC210-32	ST210	6.50
HCST211 HCST211-32 HCST211-34 HCST211-35	2 2 1/8 2 3/16	55	1	3/4	4	2 1/2	1 3/8	3 3/4	1 1/16	5 1/8	5 3/4	6 3/4	2 1/2	1 5/8	4 13/16	2.814	1.049	3	HC211 HC211-32 HC211-34 HC211-35	ST211	9.68
HCST212 HCST212-36 HCST212-38 HCST212-39	2 1/4 2 3/8 2 7/16	60	1 1/4	3/4	4	2 1/2	1 3/8	4	1 1/16	5 1/8	5 3/4	7 5/8	2 1/2	1 13/16	4 11/16	3.062	1.212	3 5/16	HC212 HC212-36 HC212-38 HC212-39	ST212	12.24


RCSMS - Narrow Inner Ring Bearing * Set Screw Locking
RCSM - Narrow Inner Ring Bearing * Eccentric Locking Collar
Cylindrical OD Rubber Cartridge

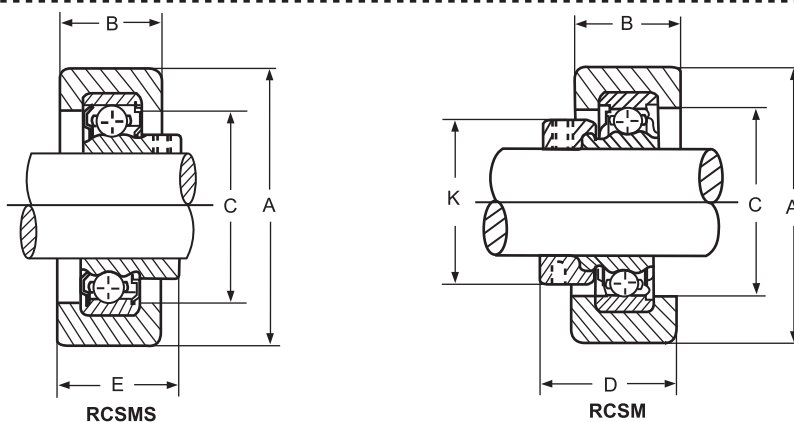

Unit No.	Shaft	Dimensions (Inch)						Bearing	Rubber	Weight
Set Screw Type	Dia.	A	B	C	D	E	K	No.	Ring No.	lbs.
RCSMS201-8	1/2	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSB201-8	RC-3	.35
RCSMS202-10	5/8	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSB202-10	RC-3	.35
RCSMS204-12	3/4	2 17/32	1	1 9/16	1 27/64	1 7/32	1 1/4	CSB204-12	RC-4	.48
RCSMS205-14	7/8	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSB205-14	RC-5	.53
RCSMS205-15	15/16	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSB205-15	RC-5	.53
RCSMS205-16	1	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSB205-16	RC-5	.53

Unit No.	Shaft	Dimensions (Inch)						Bearing	Rubber	Weight
Locking collar Type	Dia.	A	B	C	D	E	K	No.	Ring No.	lbs.
RCSM201-8	1/2	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSA201-8	RC-3	.44
RCSM202-10	5/8	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSA202-10	RC-3	.44
RCSM204-12	3/4	2 17/32	1	1 9/16	1 27/64	1 7/32	1 1/4	CSA204-12	RC-4	.52
RCSM205-14	7/8	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSA205-14	RC-5	.58
RCSM205-15	15/16	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSA205-15	RC-5	.58
RCSM205-16	1	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSA205-16	RC-5	.58


SBR - Narrow Inner Ring Bearing* Set Screw Locking
 SAR - Narrow Inner Ring Bearing * Eccentric Locking Collar
 Spherical OD Rubber Cartridge

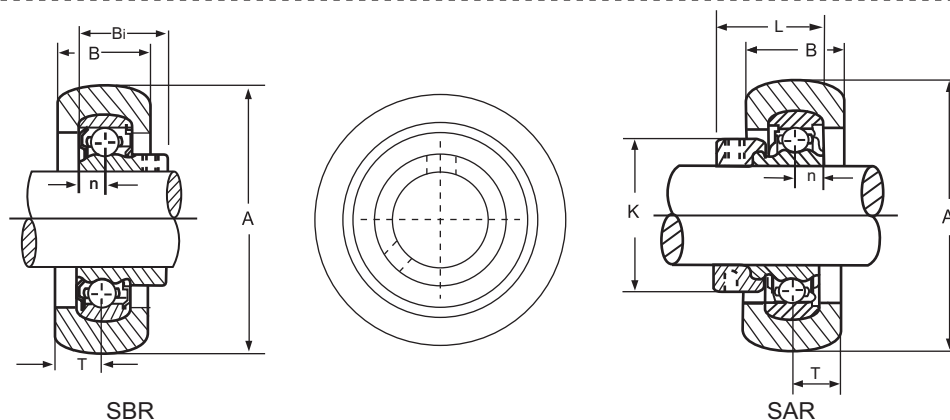

Unit No.	Shaft Dia. Inch.	Dimensions (Inch)						Bearing No.	Rubber Ring No.	Weight lbs.
		A		B	Bi	n	T			
		mm	fraction							
SBR201-8 SBR202-10	1/2 5/8	47.6	1 7/8	11/16	0.8661	0.2362	11/32	SB201-8 SB202-10	R-4	0.24
SBR204-12	3/4	52.4	2 1/16	11/16	0.9843	0.2756	11/32	SB204-12	R-5	0.35
SBR205-14 SBR205-15 SBR205-16	7/8 15/16 1	62.4	2 29/64	25/32	1.0630	0.2953	13/32	SB205-14 SB205-15 SB205-16	R-6	0.42
SBR206-17 SBR206-18 SBR206-19 SBR206-20	1 1/16 1 1/8 1 3/16 1 1/4	72.4	2 27/32	13/16	1.1811	0.3150	13/32	SB206-17 SB206-18 SB206-19 SB206-20	R-7	0.97


Unit No.	Shaft Dia. Inch.	Dimensions (Inch)							Bearing No.	Rubber Ring No.	Weight lbs.
		A		B	L	N	T	K			
		mm	fraction								
SAR201-8 SAR202-10	1/2 5/8	47.6	1 7/8	11/16	1.1260	0.2362	11/32	1 1/8	SA201-8 SA202-10	R-4	0.35
SAR204-12	3/4	52.4	2 1/16	11/16	1.2205	0.2756	11/32	1 1/4	SA204-12	R-5	0.37
SAR205-14 SAR205-15 SAR205-16	7/8 15/16 1	62.4	2 29/64	25/32	1.2205	0.2953	13/32	1 1/2	SA205-14 SA205-15 SA205-16	R-6	0.49
SAR206-17 SAR206-18 SAR206-19 SAR206-20	1 1/16 1 1/8 1 3/16 1 1/4	72.4	2 27/32	13/16	1.4065	0.3150	13/32	1 3/4	SA206-17 SA206-18 SA206-19 SA206-20	R-7	0.79

Narrow Inner Ring Bearing * Eccentric Locking Collar * Relubricatable
SA - Spherical Outer Diameter * CSA - Cylindrical Outer Diameter

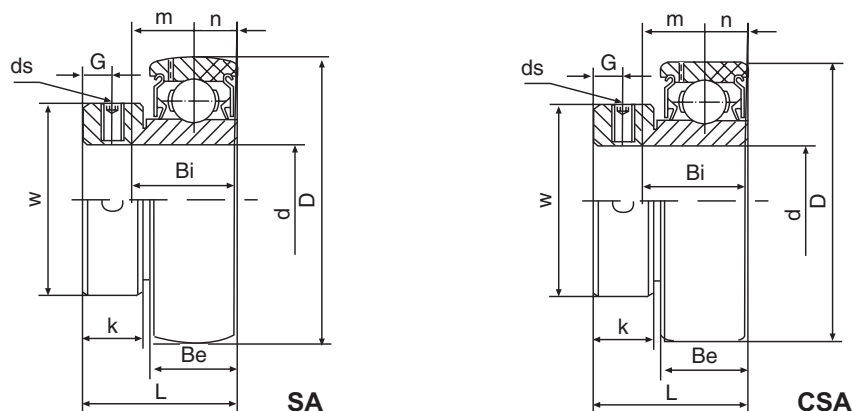


Bearing No.		Shaft Dia.		Dimension (mm/inch)											Basic Load Rating (N)		Weight (Lbs)
		In.	mm	D	Bi	Be	r	n	m	G	L	W	k	ds	Dynamic Co	Static Co	
SA201	CSA201		12														0.24
SA202	CSA202		15	40	19.1	12	0.8	6	13.1	5	28.6	28.6	13.5	M6x0.75			0.22
SA203	CSA203		17														
SA201-8	CSA201-8	1/2													780	454	0.31
SA202-9	CSA202-9	9/16															0.29
SA202-10	CSA202-10	5/8		1.5748	0.7520	0.4724	0.0320	0.2362	0.5157	0.1969	1.1250	1.1250	0.5315	1/4-28			0.26
SA203-11	CSA203-12	11/16															0.26
SA204	CSA204		20	47	21.5	14	1.5	7	14.5	5	31	33.3	13.5	M6x0.75			0.35
SA204-12	CSA204-13	3/4		1.8504	0.8465	0.5512	0.0590	0.2756	0.5709	0.1969	1.2205	1.3110	0.5315	1/4-28	1010	630	0.33
SA205	CSA205		25	52	21.5	15	1.5	7.5	14	5	31	38.1	13.5	M6x0.75			0.40
SA205-14	CSA205-14	7/8													1100	710	0.46
SA205-15	CSA205-15	15/16		2.0472	0.8465	0.5906	0.0590	0.2953	0.5572	0.1969	1.2205	1.5000	0.5315	1/4-28			0.42
SA205-16	CSA205-16	1															0.40
SA206	CSA206		30	62	23.8	16	1.5	8	15.8	6	35.7	44.5	15.9	M8x1			0.66
SA206-17	CSA206-17	1 1/16													1550	1020	0.75
SA206-18	CSA206-18	1 1/8															0.70
SA206-19	CSA206-19	1 3/16		2.4409	0.9370	0.6299	0.0590	0.3150	0.6220	0.2362	1.4055	1.7520	0.6260	5/16-24			0.66
SA206-20	CSA206-20	1 1/4															0.64
SA207	CSA207		35	72	25.4	17	2	8.5	16.9	6.5	38.9	55.6	17.5	M8x1			1.10
SA207-20	CSA207-20	1 1/4													2030	1400	1.10
SA207-21	CSA207-21	1 5/16															1.17
SA207-22	CSA207-22	1 3/8		2.8346	1.0000	0.6693	0.0787	0.3346	0.6654	0.2559	1.5315	2.1890	0.6890	5/16-24			1.10
SA207-23	CSA207-23	1 7/16															1.04
SA208	CSA208		40	80	30.2	18	2	9	21.2	6.5	43.7	60.3	18.3	M8x1			1.39
SA208-24	CSA208-24	1 1/2		3.1496	1.1890	0.7087	0.0787	0.3543	0.8346	0.2559	1.7205	2.3740	0.7205	5/16-24	2300	1600	1.47
SA208-25	CSA208-25	1 9/16															1.43
SA209	CSA209		45	85	30.2	19	2	9.5	20.7	6.5	43.7	63.5	18.3	M8x1			1.45
SA209-26	CSA209-26	1 5/8													2570	1810	1.63
SA209-27	CSA209-27	1 11/16		3.3465	1.1890	0.7480	0.0787	0.3740	0.8150	0.2559	1.7250	2.5000	0.7205	5/16-24			1.58
SA209-28	CSA209-28	1 3/4															1.47
SA210	CSA210		50	90	30.2	20	2	10	20.2	6.5	43.7	69.9	18.3	M8x1			1.76
SA210-29	CSA210-29	1 13/16													2760	2010	1.98
SA210-30	CSA210-30	1 7/8															1.89
SA210-31	CSA210-31	1 15/16		3.5433	1.1890	0.2874	0.0787	0.3937	0.7953	0.2554	1.7205	2.7520	0.7205	5/16-24			1.83
SA210-32	CSA210-32	2															1.74
SA211	CSA211		55	100	32.5	21	2.5	10.5	22	8	48.4	76.2	20.7	M10x1.25			1.69
SA211-32	CSA211-32	2													3400	2550	2.09
SA211-33	CSA211-33	2 1/16															2.00
SA211-34	CSA211-34	2 1/8		3.9370	1.2795	0.8270	0.0984	0.4134	0.8675	0.3150	1.9063	3	0.8150	3/8-24			1.89
SA211-35	CSA211-35	2 3/16															1.78
SA212	CSA212		60	110	37.1	22	2.5	11	26.1	8	53.1	84.2	22.3	M10x1.25			2.18
SA212-36	CSA212-36	2 1/4		4.3310	1.4606	0.8660	0.0984	0.4330	1.0276	0.3150	2.0910	3.3150	0.8780	3/8-24	4100	3150	2.20
SA212-39	CSA212-39	2 7/16															2.16

Narrow Inner Ring Bearing * Light Duty * Relubricatable
SB - Spherical Outer Diameter * CSB - Cylindrical Outer Diameter

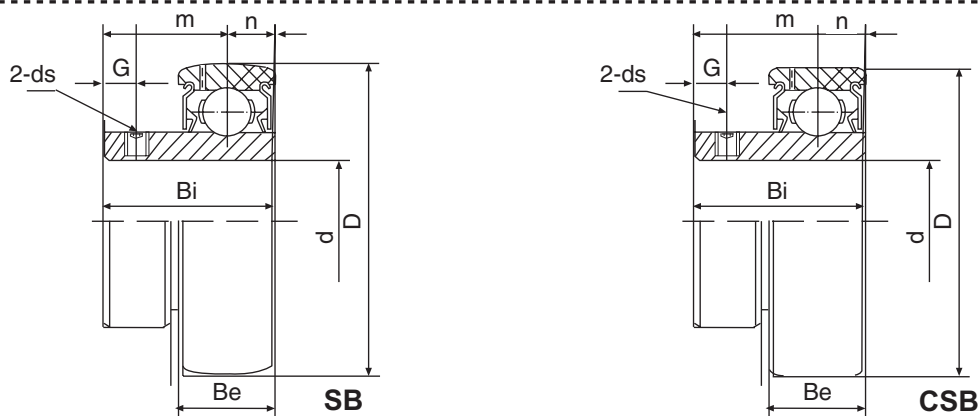


Bearing No.		Shaft Dia.		Dimension (mm/inch)								Basic Load Rating (N)		Weight (Lbs)
		In.	mm	D	Bi	Be	r	n	m	G	ds	Dynamic C	Static Co	
SB201	CSB201		12											
SB202	CSB202		15	40	22	12	1	6	16	45	M5x0.8			0.15
SB203	CSB203		17											
SB201-8	CSB201-8	1/2										780	454	
SB202-9	CSB202-9	9/16												
SB202-10	CSB202-10	5/8		0.5748	0.8661	0.4724	0.0393	0.2362	0.6300	0.1772	10-32			0.22
SB203-11	CSB203-12	11/16												
SB204	CSB204		20	47	25	14	1.5	7	18	4.5	M6x0.75	1010	630	
SB204-12	CSB204-13	3/4		1.8504	0.9840	0.5512	0.0590	0.2756	0.7080	0.1772	1/4-28			0.26
SB205	CSB205		25	52	27	15	1.5	7.5	19.5	5	M6x0.75			0.37
SB205-14	CSB205-14	7/8										1100	710	0.40
SB205-15	CSB205-15	15/16		2.0472	1.0630	0.5906	0.0590	0.2953	0.7677	0.1969	1/4-28			0.37
SB205-16	CSB205-16	1												0.35
SB206	CSB206		30	62	30	16	1.5	8	22	5.5	M6x0.75			0.55
SB206-17	CSB206-17	1 1/16										1550	1020	0.62
SB206-18	CSB206-18	1 1/8												0.57
SB206-19	CSB206-19	1 3/16		2.4409	1.1811	0.6299	0.0590	0.3150	0.8661	0.2170	1/4-28			0.55
SB206-20	CSB206-20	1 1/4												0.51
SB207	CSB207		35	72	32	17	2	8.5	23.5	6	M8x1			0.81
SB207-20	CSB207-20	1 1/4										2030	1400	0.90
SB207-21	CSB207-21	1 5/16												0.86
SB207-22	CSB207-22	1 3/8		2.8346	1.2598	0.6693	0.0787	0.3346	0.9252	0.2362	5/16-24			0.81
SB207-23	CSB207-23	1 7/16												0.77
SB208	CSB208		40	80	34	18	2	9	25	8	M8x1	2300	1600	0.99
SB208-24	CSB208-24	1 1/2		3.1496	1.3386	0.7087	0.0787	0.3543	0.9843	0.3150	5/16-24			1.06
SB208-25	CSB208-25	1 9/16												0.99
SB209	CSB209		45	85	41.2	19	2	10.2	31	8	M8x1			1.76
SB209-26	CSB209-26	1 5/8										2570	1810	1.76
SB209-27	CSB209-27	1 11/16		3.3465	1.6220	0.7480	0.0787	0.4016	1.2205	0.3150	5/16-24			1.76
SB209-28	CSB209-28	1 3/4												1.76
SB210	CSB210		50	90	43.5	20	2	10.9	32.6	9	M8x1	2760	2010	1.91
SB210-30	CSB210-30	1 7/8		3.5433	1.7126	0.7474	0.0787	0.4291	1.2835	0.3543	5/16-24			1.91
SB210-31	CSB210-31	1 15/16												1.91
SB211	CSB211		55	100	45.3	21	2.5	11.8	33.5	10	M8x1	3400	2550	2.42
SB211-32	CSB211-32	2		3.9370	1.7835	0.8268	0.0984	0.4646	1.3189	0.3937	5/16-24			2.42
SB211-35	CSB211-35	2 3/16												2.42
SB212	CSB212		60	110	53.7	22	2.5	14.9	38.8	10	M10x1.25	4100	3150	2.86
SB212-36	CSB212-36	2 1/4		4.3307	2.1142	0.8661	0.0984	0.5866	1.5276	0.3937	3/8-24			2.86
SB212-39	CSB212-39	2 7/16												2.86

Wide Inner Ring Bearing * Set Screw Locking * Relubricatable

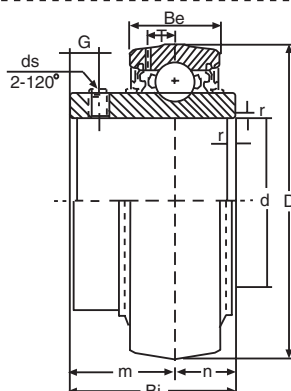


Bearing No.	Shaft Dia.		Dimension (mm/inch)									Basic Load	Rating (N)	Weight (Lbs)
	In.	mm	D	Bi	Be	r	n	m	G	ds	T	Dynamic C	Static Co	
UC201		12												0.46
UC202		15	47	31	17	1	14.3	19.8	5	M6x0.75	3.7			0.42
UC203		17												0.41
UC204		20												0.35
UC201-8	1/2											1000	630	0.44
UC202-10	5/8		1.8504	1.2205	0.6693	0.039	0.5630	0.78	0.197	1/4-28	0.1456			0.42
UC203-11	11/16													0.41
UC204-12	3/4													0.35
UC205		25	52	34.1	17	1.5	14.3	19.8	5	M6x0.75	3.9			0.42
UC205-14	7/8											1100	710	0.48
UC205-15	15/16		2.0472	1.3425	0.669	0.059	0.563	0.7795	0.1969	1/4-28	0.1535			0.44
UC205-16	1													0.42
UC206		30	62	38.1	19	1.5	15.9	22.2	5	M6x0.75	5			0.68
UC206-17	1 1/16											1540	1020	0.79
UC206-18	1 1/8													0.75
UC206-19	1 3/16		2.4409	1.500	0.748	0.059	0.626	0.8740	0.1969	1/4-28	0.1968			0.70
UC206-20	1 1/4													0.68
UC207		35	72	42.9	20	2	17.5	25.4	6.5	M8x1	5.7			1.01
UC207-20	1 1/4											2030	1400	1.14
UC207-21	1 5/16													1.10
UC207-22	1 3/8		2.8346	1.6890	0.787	0.079	0.689	1.000	0.2559	5/16-24	0.2244			1.06
UC207-23	1 7/16													1.01
UC208		40	80	49.2	21	2	19	30.2	8	M8x1	6.2			1.39
UC208-24	1 1/2		3.1496	1.9370	0.827	0.079	0.748	1.1890	0.3150	5/16-24	0.2440	2300	1600	1.51
UC208-25	1 9/16													1.41
UC209		45	85	49.2	22	2	19	30.2	8	M8x1	6.4			1.49
UC209-26	1 5/8											2560	1810	1.72
UC209-27	1 11/16		3.3465	1.9370	0.866	0.079	0.748	1.1890	0.3150	5/16-24	0.2519			1.63
UC209-28	1 3/4													1.54
UC210		50	90	51.6	24	2	19	32.6	10	M10x1.25	6.5			1.72
UC210-30	1 7/8											2750	2020	1.87
UC210-31	1 15/16		3.5433	2.0315	0.9449	0.079	0.748	1.2835	0.3937	3/8-24	0.2559			1.76
UC210-32	2													2.09
UC211		55	100	55.6	25	2.5	22.2	33.4	10	M10x1.25	7			2.35
UC211-32	2											3400	2550	2.68
UC211-34	2 1/8		3.9370	2.1890	0.9843	0.098	0.874	1.3150	0.3937	3/8-24	0.2755			2.42
UC211-35	2 3/16													2.31
UC212		60	110	65.1	27	2.5	25.4	39.7	10	M10x1.25	7.6			3.34
UC212-36	2 1/4											4100	3150	3.63
UC212-38	2 3/8		4.3307	2.5630	1.0630	0.098	1.000	1.5630	0.3937	3/8-24	0.2992			3.28
UC212-39	2 7/16													3.13
UC213		65	120	65.1	28	2.5	25.4	39.7	10	M10x1.25	8.9			3.96
UC213-40	2 1/2		4.7244	2.5630	1.1024	0.098	1.00	1.5630	0.3937	3/8-24	0.3503	4480	3470	4.14
UC214		70	125	74.6	30	2.5	30.2	44.4	12	M12x1.5	8.9			4.53
UC214-44	2 3/4		4.9213	2.9370	1.1811	0.098	1.189	1.7480	0.4724	7/16-20	0.3503	4870	3810	4.55
UC215		75	130	77.8	32	2.5	33.3	44.5	12	M12x1.5	8.9			4.82
UC215-47	2 15/16		5.1181	3.0630	1.2598	0.098	1.311	1.7520	0.4724	7/16-20	0.3503	5200	4200	4.86
UC215-48	3													4.64
UC216		80	140	82.6	33	3	33.3	49.3	14	M12x1.5	9.6			6.20
UC216-50	3 1/8		5.5118	3.2520	1.2992	0.1180	1.3110	1.9410	0.5512	7/16-20	0.3779	5700	4550	6.38
UC217		85	150	85.7	35	3	34.1	51.6	14	M12x1.5	10			7.61
UC217-52	3 1/4		5.9055	3.3740	1.3780	0.1180	1.3425	2.0315	0.5512	7/16-20	0.3937	6600	5320	7.83
UC218		90	160	96	37	3	39.7	56.3	15	M12x1.5	11			9.97
UC218-56	3 1/2		6.2992	3.7795	1.4567	0.1180	1.5630	2.2165	0.5905	1/2-20	0.4330	7550	6170	10.16

Wide Inner Ring Bearing * Eccentric Locking Collar * Relubricatable

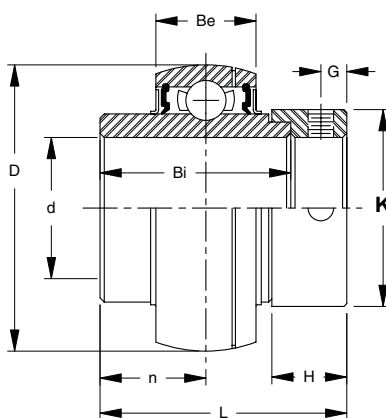


Bearing No.	Shaft Dia.		Dimension (mm/inch)									Basic Load Rating (N)		Weight (Lbs)
	In.	mm	D	L	Bi	Be	n	K	H	G	ds	Dynamic C	Static Co	
HC204		20	47	43.2	34.1	16	17.1	32	13.5	4.8				0.46
HC201-8	1/2													0.59
HC202-10	5/8		1.8504	4302	34.1	0.629	0.673	1.260	0.531	0.188	1/4-28	2880	1484	0.53
HC204-12	3/4													0.57
HC205		25	52	44.4	34.9	17	17.5	38.1	13.5	4.8				0.22
HC205-14	7/8													0.64
HC205-15	15/16		2.0472	1.748	1.374	0.669	0.688	1.500	0.531	0.188	1/4-28	3152	1765	0.59
HC205-16	1													0.55
HC206		30	62	48.4	36.5	19	18.3	44.4	15.9	6				0.79
HC206-17	1 1/16													0.88
HC206-18	1 1/8		2.4409	1.905	1.437	0.748	0.720	1.748	0.625	0.234	5/16-24	4375	2542	0.84
HC206-19	1 3/16													0.77
HC206-20	1 1/4													0.71
HC207		35	72	51.2	37.7	20	18.8	55.6	17.5	6.8				1.31
HC207-20	1 1/4													1.37
HC207-21	1 5/16		2.8346	2.016	1.484	0.787	18.8	2.188	0.688	0.266	5/16-24	5777	3459	1.36
HC207-22	1 3/8													1.31
HC207-23	1 7/16													1.21
HC208		40	80	56.4	42.9	21	21.4	60.3	18.3	6.8				1.63
HC208-24	1 1/2		3.1496	2.220	1.689	0.862	0.844	2.377	0.719	0.266	5/16-24	5787	4042	1.63
HC208-25	1 9/16													1.65
HC209		45	85	56.4	42.9	22	21.4	63.5	18.3	6.8				1.81
HC209-26	1 5/8													2.05
HC209-27	1 11/16		3.3465	2.220	1.689	0.866	0.844	2.499	0.719	0.266	5/16-24	7357	4595	1.94
HC209-28	1 3/4													1.85
HC210		50	90	62.7	49.2	22	24.6	69.8	18.3	6.8				2.38
HC210-30	1 7/8													2.57
HC210-31	1 15/16		3.5433	2.468	1.937	0.866	0.969	2.751	0.719	0.266	5/16-24	7895	5180	2.44
HC210-32	2													2.46
HC211		55	100	71.4	55.6	24	27.7	76.2	20.6	8				3.08
HC211-32	2													3.51
HC211-34	2 1/8		3.9370	2.814	2.189	0.944	1.091	2.999	0.813	0.313	5/16-24	9757	6552	3.19
HC211-35	2 3/16													3.01
HC212		60	110	77.8	61.9	27	31	84.1	22.2	8				3.74
HC212-36	2 1/4													4.29
HC212-38	2 3/8		4.3307	3.062	2.437	1.023	1.219	3.312	0.875	0.313	3/8-24	11798	8093	3.89
HC212-39	2 7/16													3.71
HC215-47	2 15/16		130	85.7	74.6	30	37.3	102	23.5	8.5	3/8-24	15149	10897	5.63
HC215-48	3		5.1181	3.374	2.937	1.181	1.469	4.016	0.925	0.335				5.35

Wide Inner Ring Bearing * Set Screw Locking * Medium Duty
Relubricatable * Spherical Outer Diameter

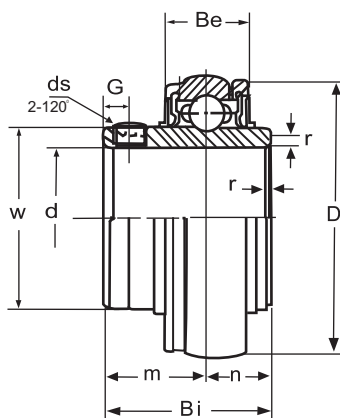

Bearing No.	Shaft Dia.	Dimension (mm/inch)									Basic Load Rating (N)		Weight (Lbs)
	In.	D	Bi	Be	r	n	m	G	ds	w	Dynamic C	Static Co	
UCX05-14	7/8	62	38.1	19	1.5	15.9	22.2	5					
UCX05-15	15/16	2.4409	1.500	0.748	0.059	0.626	0.874	0.197	1/4-28	1.591	4380	2559	0.81
UCX05-16	1												
UCX06-18	1 1/8	72	42.9	20	1.5	17.5	25.4	6					
UCX06-19	1 3/16	2.8346	1.689	0.787	0.059	0.689	1.000	0.236	5/16-24	1.866	5781	3483	1.03
UCX06-20	1 1/4												
UCX07-20	1 1/4	80	49.2	21	2	19	30.2	8					
UCX07-21	1 5/16								5/16-24	2.075	6558	4043	1.67
UCX07-22	1 3/8	3.1496	1.937	0.827	0.079	0.748	1.189	0.315					
UCX07-23	1 7/16												
UCX08-24	1 1/2	85	49.2	22	2	19	30.2	8	5/16-24	2.248	7365	4599	1.78
UCX08-25	1 9/16	3.3465	1.937	0.866	0.079	0.748	1.189	0.315					
UCX09-26	1 5/8	90	51.6	22	2	19	32.6	9					
UCX09-27	1 11/16	3.5433	2.031	0.866	0.079	0.748	1.283	0.354	3/8-24	2.465	7895	5178	2.02
UCX09-28	1 3/4												
UCX10-30	1 7/8	100	55.6	24	2	22.2	1.315	9					
UCX10-31	1 15/16	3.9370	2.189	0.944	0.079	0.874	33.4	0.354	3/8-24	2.776	9759	6552	2.71
UCX10-32													
UCX11-34	2 1/8	110	65.1	26	2.5	25.4	39.7	10					
UCX11-35	2 3/16	4.3307	2.563	1.024	0.098	1.000	1.563	0.394	3/8-24	3.059	11798	8093	3.83
UCX11-36	2 1/4												
UCX12-38	2 3/8	120	65.1	27	2.5	25.4	1.563	10	3/8-24	3.260	12880	8917	4.47
UCX12-39	2 7/16	4.7244	2.563	1.063	0.098	1.000	39.7	0.394					
UCX13-40	2 1/2	125	74.6	29	2.5	30.2	44.4	12	7/16-20	3.425	13984	10031	5.13
		4.9213	2.937	1.142	0.098	1.189	1.748	0.472					
UCX14-44	2 3/4	130	77.8	30	2.5	33.3	44.5	12	7/16-20	3.598	14839	11224	5.59
		5.1181	3.063	1.181	0.098	1.311	1.752	0.472					
UCX15-47	2 15/16	140	82.6	32	2.5	33.3	49.3	12	7/16-20	3.878	17412	13174	7.04
UCX15-48	3	5.5118	3.252	1.260	0.098	1.311	1.941	0.472					

Wide Inner Ring Bearing - Set Screw Locking - Cylindrical OD / Snap Ring

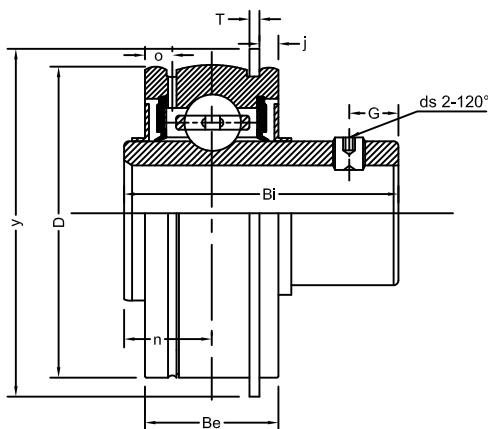

Bearing No.	Shaft Dia.		Dimensions (mm/inch)										Basic Load Ratings (N)		Weight (Lbs)
	In.	mm	D	Bi	Be	n	o	T	j	G	ds	y	Dynamic C	Static Co	
SER201-08	1/2		1.85	1.22	0.63	0.45	0.16	0.05	0.11	0.21					
SER202-10	5/8		47	31.0	15.9	11.5	4.0	1.35	2.46	5.0	1/4-28UNF M6 x 1.0	52.7	12850	6650	0.55
SER204		20													
SER204-12	3/4														
SER205		25	52	34.9	19.1	13.1	5.2	1.35	2.46	5.6		57.9	14030	7880	0.68
SER205-14	7/8		2.05	1.37	0.75	0.52	0.21	0.05	0.06	0.22	1/4-28UNF M6 x 1.0	2.28			
SER205-15	15/16														
SER205-16	1														
SER206		30	62	38.1	22.2	15.9	5.6	1.90	3.28	5.6		67.7	19480	11320	0.92
SER206-17	1-1/16		2.44	1.50	1.87	0.63	0.22	0.75	0.13	0.10	1/4-28UNF M6 x 1.0	2.67			
SER206-18	1-1/8														
SER206-19	1-3/16														
SER206-20	1-1/4S														
SER207		35	72	42.9	23.8	17.5	5.6	1.90	3.28	6.4		78.6	25680	15310	1.36
SER207-20	1-1/4		2.83	1.69	0.94	0.69	0.22	0.07	0.13	0.25	5/16-24UNF M8 x 1.0	3.09			
SER207-21	1-5/16														
SER207-22	1-3/8														
SER207-23	1-7/16														
SER208		40	80	49.2	27.8	19.0	6.4	1.90	3.28	8.0		86.6	29540	18150	2.0
SER208-24	1-1/2		3.15	1.94	1.09	1.75	0.25	0.07	0.13	0.32	5/16-24UNF M8 x 1.0	3.41			
SER208-25	1-9/16														
SER209		45	85	49.2	27.8	19.0	6.4	1.90	3.28	8.0		91.6	31700	20690	2.31
SER209-26	1-5/8		3.35	1.94	1.09	0.75	0.25	0.07	0.13	0.13	3/8-24UNF M10 x 1.25	3.60			
SER209-27	1-11/16														
SER209-28	1-3/4														
SER210		50	90	51.6	28.6	19.0	7.5	2.70	3.28	9.5		96.6	35100	23190	2.42
SER210-30	1-7/8		3.54	2.03	1.13	0.75	0.31	0.11	0.13	0.37	3/8-24UNF M10 x 1.25	3.80			
SER210-31	1-15/16														
SER210-32	2S														
SER211		55	100	55.6	30.2	22.2	7.5	2.70	3.28	9.5		106.6	43400	29240	2.99
SER211-32	2		3.94	2.19	1.19	0.87	0.31	0.11	0.13	0.37	3/8-24UNF M10 x 1.25	4.21			
SER211-34	2-1/8														
SER211-35	2-3/16														
SER212		60	110	65.1	31.8	25.4	7.5	2.70	3.28	11.1		116.6	47790	32950	5.57
SER212-36	2-1/4		4.33	2.56	1.25	1.00	0.31	0.12	0.13	0.44	3/8-24UNF M10 x 1.25	4.59			
SER212-38	2-3/8														
SER212-39	2-7/16														
SER213		65	120	65.1	32	25.4	7.9	2.80	4.00	11.1		134.7	57250	40030	6.38
SER213-40	2-1/2		4.72	2.56	1.26	1.00	0.31	0.11	0.16	0.44	3/8-24UNF M10 x 1.25	5.30			
SER215		75	130	77.8	38.1	33.3	10.0	3.10	4.16	12	3/8-24UNF M10 x 1.25	139.7			
SER215-47	2-15/16		5.12	3.06	1.05	1.31	0.39	0.12	0.16	0.47		5.05	66220	49530	7.92
SER215-48	3														



1111



Bearings



Couplings



Sprockets



V-belt Drives



Tighteners & Idlers



Synchronous Drives



Available at:



Toll Free : 877-564-1600

info@powerdrive.com