


PowerDrive LLC
MECHANICAL P.T. COMPONENTS
www.powerdrive.com

Insert Bearings


Series	Bearing Inner Ring	Locking type	Type	Shaft Diameter		Page
				Inch	MM	
SA200	Narrow	Eccentric Collar	Spherical	1/2 - 2 7/16	-	44
CSA200	Narrow	Eccentric Collar	Cylindrical	1/2 - 3	-	44
SB200	Narrow	Set Screw	Spherical	1/2 - 2 7/16	-	45
CSB200	Narrow	Set Screw	Cylindrical	1/2 - 3	-	45
UC200	Wide	Set Screw	Spherical	1/2 - 3	12 - 75	46
HC200	Wide	Eccentric Collar	Spherical	1/2 - 3	20 - 60	47
UCX	Wide	Set Screw	Spherical	7/8 - 3	-	48
SER200	Wide	Set Screw	Cylindrical / Snap Ring	1/2 - 2 7/16	-	49

Narrow Inner Ring Bearing * Eccentric Locking Collar * Relubricatable
SA - Spherical Outer Diameter * CSA - Cylindrical Outer Diameter

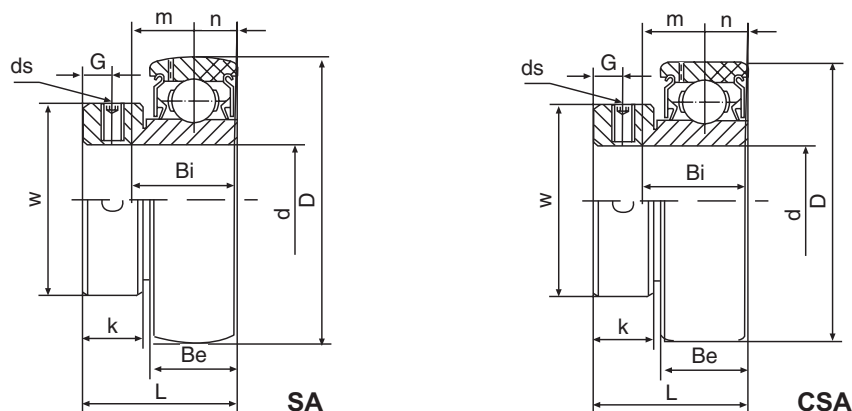


Bearing No.		Shaft Dia.		Dimension (mm/inch)											Basic Load Rating (N)		Weight (Lbs)
		In.	mm	D	Bi	Be	r	n	m	G	L	W	k	ds	Dynamic Co	Static Co	
SA201	CSA201		12														0.24
SA202	CSA202		15	40	19.1	12	0.8	6	13.1	5	28.6	28.6	13.5	M6x0.75			0.22
SA203	CSA203		17														
SA201-8	CSA201-8	1/2													780	454	0.31
SA202-9	CSA202-9	9/16															0.29
SA202-10	CSA202-10	5/8		1.5748	0.7520	0.4724	0.0320	0.2362	0.5157	0.1969	1.1250	1.1250	0.5315	1/4-28			0.26
SA203-11	CSA203-12	11/16															0.26
SA204	CSA204		20	47	21.5	14	1.5	7	14.5	5	31	33.3	13.5	M6x0.75			0.35
SA204-12	CSA204-13	3/4		1.8504	0.8465	0.5512	0.0590	0.2756	0.5709	0.1969	1.2205	1.3110	0.5315	1/4-28	1010	630	0.33
SA205	CSA205		25	52	21.5	15	1.5	7.5	14	5	31	38.1	13.5	M6x0.75			0.40
SA205-14	CSA205-14	7/8													1100	710	0.46
SA205-15	CSA205-15	15/16		2.0472	0.8465	0.5906	0.0590	0.2953	0.5572	0.1969	1.2205	1.5000	0.5315	1/4-28			0.42
SA205-16	CSA205-16	1															0.40
SA206	CSA206		30	62	23.8	16	1.5	8	15.8	6	35.7	44.5	15.9	M8x1			0.66
SA206-17	CSA206-17	1 1/16													1550	1020	0.75
SA206-18	CSA206-18	1 1/8															0.70
SA206-19	CSA206-19	1 3/16		2.4409	0.9370	0.6299	0.0590	0.3150	0.6220	0.2362	1.4055	1.7520	0.6260	5/16-24			0.66
SA206-20	CSA206-20	1 1/4															0.64
SA207	CSA207		35	72	25.4	17	2	8.5	16.9	6.5	38.9	55.6	17.5	M8x1			1.10
SA207-20	CSA207-20	1 1/4													2030	1400	1.10
SA207-21	CSA207-21	1 5/16															1.17
SA207-22	CSA207-22	1 3/8		2.8346	1.0000	0.6693	0.0787	0.3346	0.6654	0.2559	1.5315	2.1890	0.6890	5/16-24			1.10
SA207-23	CSA207-23	1 7/16															1.04
SA208	CSA208		40	80	30.2	18	2	9	21.2	6.5	43.7	60.3	18.3	M8x1			1.39
SA208-24	CSA208-24	1 1/2		3.1496	1.1890	0.7087	0.0787	0.3543	0.8346	0.2559	1.7205	2.3740	0.7205	5/16-24	2300	1600	1.47
SA208-25	CSA208-25	1 9/16															1.43
SA209	CSA209		45	85	30.2	19	2	9.5	20.7	6.5	43.7	63.5	18.3	M8x1			1.45
SA209-26	CSA209-26	1 5/8													2570	1810	1.63
SA209-27	CSA209-27	1 11/16		3.3465	1.1890	0.7480	0.0787	0.3740	0.8150	0.2559	1.7250	2.5000	0.7205	5/16-24			1.58
SA209-28	CSA209-28	1 3/4															1.47
SA210	CSA210		50	90	30.2	20	2	10	20.2	6.5	43.7	69.9	18.3	M8x1			1.76
SA210-29	CSA210-29	1 13/16													2760	2010	1.98
SA210-30	CSA210-30	1 7/8															1.89
SA210-31	CSA210-31	1 15/16		3.5433	1.1890	0.2874	0.0787	0.3937	0.7953	0.2554	1.7205	2.7520	0.7205	5/16-24			1.83
SA210-32	CSA210-32	2															1.74
SA211	CSA211		55	100	32.5	21	2.5	10.5	22	8	48.4	76.2	20.7	M10x1.25			1.69
SA211-32	CSA211-32	2													3400	2550	2.09
SA211-33	CSA211-33	2 1/16															2.00
SA211-34	CSA211-34	2 1/8		3.9370	1.2795	0.8270	0.0984	0.4134	0.8675	0.3150	1.9063	3	0.8150	3/8-24			1.89
SA211-35	CSA211-35	2 3/16															1.78
SA212	CSA212		60	110	37.1	22	2.5	11	26.1	8	53.1	84.2	22.3	M10x1.25			2.18
SA212-36	CSA212-36	2 1/4		4.3310	1.4606	0.8660	0.0984	0.4330	1.0276	0.3150	2.0910	3.3150	0.8780	3/8-24	4100	3150	2.20
SA212-39	CSA212-39	2 7/16															2.16

Narrow Inner Ring Bearing * Light Duty * Relubricatable
SB - Spherical Outer Diameter * CSB - Cylindrical Outer Diameter

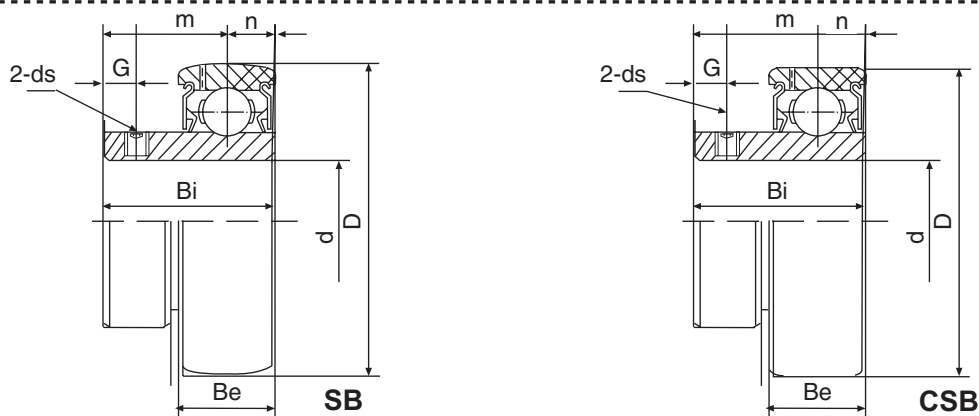


Bearing No.		Shaft Dia.		Dimension (mm/inch)								Basic Load Rating (N)		Weight (Lbs)
		In.	mm	D	Bi	Be	r	n	m	G	ds	Dynamic C	Static Co	
SB201	CSB201		12											
SB202	CSB202		15	40	22	12	1	6	16	45	M5x0.8			0.15
SB203	CSB203		17											
SB201-8	CSB201-8	1/2										780	454	
SB202-9	CSB202-9	9/16												
SB202-10	CSB202-10	5/8		0.5748	0.8661	0.4724	0.0393	0.2362	0.6300	0.1772	10-32			0.22
SB203-11	CSB203-12	11/16												
SB204	CSB204		20	47	25	14	1.5	7	18	4.5	M6x0.75	1010	630	
SB204-12	CSB204-13	3/4		1.8504	0.9840	0.5512	0.0590	0.2756	0.7080	0.1772	1/4-28			0.26
SB205	CSB205		25	52	27	15	1.5	7.5	19.5	5	M6x0.75			0.37
SB205-14	CSB205-14	7/8										1100	710	0.40
SB205-15	CSB205-15	15/16		2.0472	1.0630	0.5906	0.0590	0.2953	0.7677	0.1969	1/4-28			0.37
SB205-16	CSB205-16	1												0.35
SB206	CSB206		30	62	30	16	1.5	8	22	5.5	M6x0.75			0.55
SB206-17	CSB206-17	1 1/16												0.62
SB206-18	CSB206-18	1 1/8										1550	1020	0.57
SB206-19	CSB206-19	1 3/16		2.4409	1.1811	0.6299	0.0590	0.3150	0.8661	0.2170	1/4-28			0.55
SB206-20	CSB206-20	1 1/4												0.51
SB207	CSB207		35	72	32	17	2	8.5	23.5	6	M8x1			0.81
SB207-20	CSB207-20	1 1/4												0.90
SB207-21	CSB207-21	1 5/16										2030	1400	0.86
SB207-22	CSB207-22	1 3/8		2.8346	1.2598	0.6693	0.0787	0.3346	0.9252	0.2362	5/16-24			0.81
SB207-23	CSB207-23	1 7/16												0.77
SB208	CSB208		40	80	34	18	2	9	25	8	M8x1			0.99
SB208-24	CSB208-24	1 1/2		3.1496	1.3386	0.7087	0.0787	0.3543	0.9843	0.3150	5/16-24	2300	1600	1.06
SB208-25	CSB208-25	1 9/16												0.99
SB209	CSB209		45	85	41.2	19	2	10.2	31	8	M8x1			1.76
SB209-26	CSB209-26	1 5/8												1.76
SB209-27	CSB209-27	1 11/16		3.3465	1.6220	0.7480	0.0787	0.4016	1.2205	0.3150	5/16-24	2570	1810	1.76
SB209-28	CSB209-28	1 3/4												1.76
SB210	CSB210		50	90	43.5	20	2	10.9	32.6	9	M8x1			1.91
SB210-30	CSB210-30	1 7/8		3.5433	1.7126	0.7474	0.0787	0.4291	1.2835	0.3543	5/16-24	2760	2010	1.91
SB210-31	CSB210-31	1 15/16												1.91
SB211	CSB211		55	100	45.3	21	2.5	11.8	33.5	10	M8x1			2.42
SB211-32	CSB211-32	2		3.9370	1.7835	0.8268	0.0984	0.4646	1.3189	0.3937	5/16-24	3400	2550	2.42
SB211-35	CSB211-35	2 3/16												2.42
SB212	CSB212		60	110	53.7	22	2.5	14.9	38.8	10	M10x1.25			2.86
SB212-36	CSB212-36	2 1/4		4.3307	2.1142	0.8661	0.0984	0.5866	1.5276	0.3937	3/8-24	4100	3150	2.86
SB212-39	CSB212-39	2 7/16												2.86

Wide Inner Ring Bearing * Set Screw Locking * Relubricatable

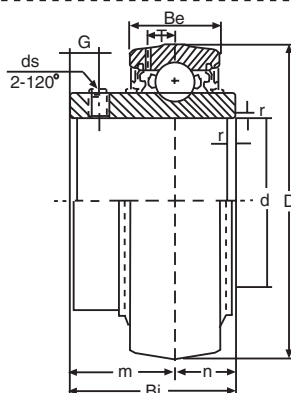


Bearing No.	Shaft Dia.		Dimension (mm/inch)									Basic Load	Rating (N)	Weight (Lbs)
	In.	mm	D	Bi	Be	r	n	m	G	ds	T	Dynamic C	Static Co	
UC201		12												0.46
UC202		15	47	31	17	1	14.3	19.8	5	M6x0.75	3.7			0.42
UC203		17												0.41
UC204		20												0.35
UC201-8	1/2											1000	630	0.44
UC202-10	5/8		1.8504	1.2205	0.6693	0.039	0.5630	0.78	0.197	1/4-28	0.1456			0.42
UC203-11	11/16													0.41
UC204-12	3/4													0.35
UC205		25	52	34.1	17	1.5	14.3	19.8	5	M6x0.75	3.9			0.42
UC205-14	7/8											1100	710	0.48
UC205-15	15/16		2.0472	1.3425	0.669	0.059	0.563	0.7795	0.1969	1/4-28	0.1535			0.44
UC205-16	1													0.42
UC206		30	62	38.1	19	1.5	15.9	22.2	5	M6x0.75	5			0.68
UC206-17	1 1/16											1540	1020	0.79
UC206-18	1 1/8													0.75
UC206-19	1 3/16		2.4409	1.500	0.748	0.059	0.626	0.8740	0.1969	1/4-28	0.1968			0.70
UC206-20	1 1/4													0.68
UC207		35	72	42.9	20	2	17.5	25.4	6.5	M8x1	5.7			1.01
UC207-20	1 1/4											2030	1400	1.14
UC207-21	1 5/16													1.10
UC207-22	1 3/8		2.8346	1.6890	0.787	0.079	0.689	1.000	0.2559	5/16-24	0.2244			1.06
UC207-23	1 7/16													1.01
UC208		40	80	49.2	21	2	19	30.2	8	M8x1	6.2			1.39
UC208-24	1 1/2		3.1496	1.9370	0.827	0.079	0.748	1.1890	0.3150	5/16-24	0.2440	2300	1600	1.51
UC208-25	1 9/16													1.41
UC209		45	85	49.2	22	2	19	30.2	8	M8x1	6.4			1.49
UC209-26	1 5/8											2560	1810	1.72
UC209-27	1 11/16		3.3465	1.9370	0.866	0.079	0.748	1.1890	0.3150	5/16-24	0.2519			1.63
UC209-28	1 3/4													1.54
UC210		50	90	51.6	24	2	19	32.6	10	M10x1.25	6.5			1.72
UC210-30	1 7/8											2750	2020	1.87
UC210-31	1 15/16		3.5433	2.0315	0.9449	0.079	0.748	1.2835	0.3937	3/8-24	0.2559			1.76
UC210-32	2													2.09
UC211		55	100	55.6	25	2.5	22.2	33.4	10	M10x1.25	7			2.35
UC211-32	2											3400	2550	2.68
UC211-34	2 1/8		3.9370	2.1890	0.9843	0.098	0.874	1.3150	0.3937	3/8-24	0.2755			2.42
UC211-35	2 3/16													2.31
UC212		60	110	65.1	27	2.5	25.4	39.7	10	M10x1.25	7.6			3.34
UC212-36	2 1/4											4100	3150	3.63
UC212-38	2 3/8		4.3307	2.5630	1.0630	0.098	1.000	1.5630	0.3937	3/8-24	0.2992			3.28
UC212-39	2 7/16													3.13
UC213		65	120	65.1	28	2.5	25.4	39.7	10	M10x1.25	8.9			3.96
UC213-40	2 1/2		4.7244	2.5630	1.1024	0.098	1.00	1.5630	0.3937	3/8-24	0.3503	4480	3470	4.14
UC214		70	125	74.6	30	2.5	30.2	44.4	12	M12x1.5	8.9			4.53
UC214-44	2 3/4		4.9213	2.9370	1.1811	0.098	1.189	1.7480	0.4724	7/16-20	0.3503	4870	3810	4.55
UC215		75	130	77.8	32	2.5	33.3	44.5	12	M12x1.5	8.9			4.82
UC215-47	2 15/16		5.1181	3.0630	1.2598	0.098	1.311	1.7520	0.4724	7/16-20	0.3503	5200	4200	4.86
UC215-48	3													4.64
UC216		80	140	82.6	33	3	33.3	49.3	14	M12x1.5	9.6			6.20
UC216-50	3 1/8		5.5118	3.2520	1.2992	0.1180	1.3110	1.9410	0.5512	7/16-20	0.3779	5700	4550	6.38
UC217		85	150	85.7	35	3	34.1	51.6	14	M12x1.5	10			7.61
UC217-52	3 1/4		5.9055	3.3740	1.3780	0.1180	1.3425	2.0315	0.5512	7/16-20	0.3937	6600	5320	7.83
UC218		90	160	96	37	3	39.7	56.3	15	M12x1.5	11			9.97
UC218-56	3 1/2		6.2992	3.7795	1.4567	0.1180	1.5630	2.2165	0.5905	1/2-20	0.4330	7550	6170	10.16

Wide Inner Ring Bearing * Eccentric Locking Collar * Relubricatable

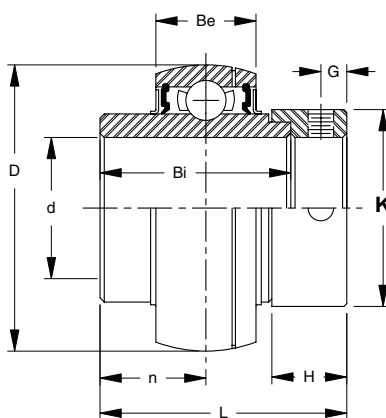


Bearing No.	Shaft Dia.		Dimension (mm/inch)									Basic Load Rating (N)		Weight (Lbs)
	In.	mm	D	L	Bi	Be	n	K	H	G	ds	Dynamic C	Static Co	
HC204		20	47	43.2	34.1	16	17.1	32	13.5	4.8				0.46
HC201-8	1/2													0.59
HC202-10	5/8		1.8504	4302	34.1	0.629	0.673	1.260	0.531	0.188	1/4-28	2880	1484	0.53
HC204-12	3/4													0.57
HC205		25	52	44.4	34.9	17	17.5	38.1	13.5	4.8				0.22
HC205-14	7/8													0.64
HC205-15	15/16		2.0472	1.748	1.374	0.669	0.688	1.500	0.531	0.188	1/4-28	3152	1765	0.59
HC205-16	1													0.55
HC206		30	62	48.4	36.5	19	18.3	44.4	15.9	6				0.79
HC206-17	1 1/16													0.88
HC206-18	1 1/8		2.4409	1.905	1.437	0.748	0.720	1.748	0.625	0.234	5/16-24	4375	2542	0.84
HC206-19	1 3/16													0.77
HC206-20	1 1/4													0.71
HC207		35	72	51.2	37.7	20	18.8	55.6	17.5	6.8				1.31
HC207-20	1 1/4													1.37
HC207-21	1 5/16		2.8346	2.016	1.484	0.787	18.8	2.188	0.688	0.266	5/16-24	5777	3459	1.36
HC207-22	1 3/8													1.31
HC207-23	1 7/16													1.21
HC208		40	80	56.4	42.9	21	21.4	60.3	18.3	6.8				1.63
HC208-24	1 1/2		3.1496	2.220	1.689	0.862	0.844	2.377	0.719	0.266	5/16-24	5787	4042	1.63
HC208-25	1 9/16													1.65
HC209		45	85	56.4	42.9	22	21.4	63.5	18.3	6.8				1.81
HC209-26	1 5/8													2.05
HC209-27	1 11/16		3.3465	2.220	1.689	0.866	0.844	2.499	0.719	0.266	5/16-24	7357	4595	1.94
HC209-28	1 3/4													1.85
HC210		50	90	62.7	49.2	22	24.6	69.8	18.3	6.8				2.38
HC210-30	1 7/8													2.57
HC210-31	1 15/16		3.5433	2.468	1.937	0.866	0.969	2.751	0.719	0.266	5/16-24	7895	5180	2.44
HC210-32	2													2.46
HC211		55	100	71.4	55.6	24	27.7	76.2	20.6	8				3.08
HC211-32	2													3.51
HC211-34	2 1/8		3.9370	2.814	2.189	0.944	1.091	2.999	0.813	0.313	5/16-24	9757	6552	3.19
HC211-35	2 3/16													3.01
HC212		60	110	77.8	61.9	27	31	84.1	22.2	8				3.74
HC212-36	2 1/4													4.29
HC212-38	2 3/8		4.3307	3.062	2.437	1.023	1.219	3.312	0.875	0.313	3/8-24	11798	8093	3.89
HC212-39	2 7/16													3.71
HC215-47	2 15/16		130	85.7	74.6	30	37.3	102	23.5	8.5	3/8-24	15149	10897	5.63
HC215-48	3		5.1181	3.374	2.937	1.181	1.469	4.016	0.925	0.335				5.35

Wide Inner Ring Bearing * Set Screw Locking * Medium Duty
Relubricatable * Spherical Outer Diameter

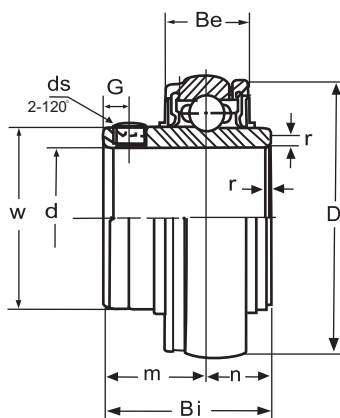

Bearing No.	Shaft Dia.	Dimension (mm/inch)									Basic Load Rating (N)		Weight (Lbs)
	In.	D	Bi	Be	r	n	m	G	ds	w	Dynamic C	Static Co	
UCX05-14	7/8	62	38.1	19	1.5	15.9	22.2	5					
UCX05-15	15/16	2.4409	1.500	0.748	0.059	0.626	0.874	0.197	1/4-28	1.591	4380	2559	0.81
UCX05-16	1												
UCX06-18	1 1/8	72	42.9	20	1.5	17.5	25.4	6					
UCX06-19	1 3/16	2.8346	1.689	0.787	0.059	0.689	1.000	0.236	5/16-24	1.866	5781	3483	1.03
UCX06-20	1 1/4												
UCX07-20	1 1/4	80	49.2	21	2	19	30.2	8					
UCX07-21	1 5/16												
UCX07-22	1 3/8	3.1496	1.937	0.827	0.079	0.748	1.189	0.315	5/16-24	2.075	6558	4043	1.67
UCX07-23	1 7/16												
UCX08-24	1 1/2	85	49.2	22	2	19	30.2	8	5/16-24	2.248	7365	4599	1.78
UCX08-25	1 9/16	3.3465	1.937	0.866	0.079	0.748	1.189	0.315					
UCX09-26	1 5/8	90	51.6	22	2	19	32.6	9					
UCX09-27	1 11/16	3.5433	2.031	0.866	0.079	0.748	1.283	0.354	3/8-24	2.465	7895	5178	2.02
UCX09-28	1 3/4												
UCX10-30	1 7/8	100	55.6	24	2	22.2	1.315	9					
UCX10-31	1 15/16	3.9370	2.189	0.944	0.079	0.874	33.4	0.354	3/8-24	2.776	9759	6552	2.71
UCX10-32													
UCX11-34	2 1/8	110	65.1	26	2.5	25.4	39.7	10					
UCX11-35	2 3/16	4.3307	2.563	1.024	0.098	1.000	1.563	0.394	3/8-24	3.059	11798	8093	3.83
UCX11-36	2 1/4												
UCX12-38	2 3/8	120	65.1	27	2.5	25.4	1.563	10	3/8-24	3.260	12880	8917	4.47
UCX12-39	2 7/16	4.7244	2.563	1.063	0.098	1.000	39.7	0.394					
UCX13-40	2 1/2	125	74.6	29	2.5	30.2	44.4	12	7/16-20	3.425	13984	10031	5.13
		4.9213	2.937	1.142	0.098	1.189	1.748	0.472					
UCX14-44	2 3/4	130	77.8	30	2.5	33.3	44.5	12	7/16-20	3.598	14839	11224	5.59
		5.1181	3.063	1.181	0.098	1.311	1.752	0.472					
UCX15-47	2 15/16	140	82.6	32	2.5	33.3	49.3	12	7/16-20	3.878	17412	13174	7.04
UCX15-48	3	5.5118	3.252	1.260	0.098	1.311	1.941	0.472					

Wide Inner Ring Bearing - Set Screw Locking - Cylindrical OD / Snap Ring

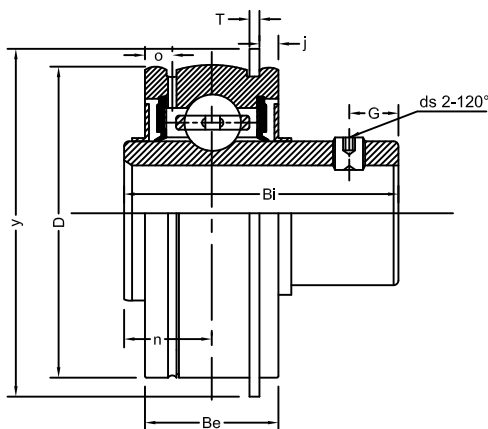

Bearing No.	Shaft Dia.		Dimensions (mm/inch)										Basic Load Ratings (N)		Weight (Lbs)
	In.	mm	D	Bi	Be	n	o	T	j	G	ds	y	Dynamic C	Static Co	
SER201-08	1/2		1.85	1.22	0.63	0.45	0.16	0.05	0.11	0.21					
SER202-10	5/8		47	31.0	15.9	11.5	4.0	1.35	2.46	5.0	1/4-28UNF M6 x 1.0	52.7	12850	6650	0.55
SER204		20													
SER204-12	3/4														
SER205		25	52	34.9	19.1	13.1	5.2	1.35	2.46	5.6		57.9	14030	7880	0.68
SER205-14	7/8		2.05	1.37	0.75	0.52	0.21	0.05	0.06	0.22	1/4-28UNF M6 x 1.0	2.28			
SER205-15	15/16														
SER205-16	1														
SER206		30	62	38.1	22.2	15.9	5.6	1.90	3.28	5.6		67.7	19480	11320	0.92
SER206-17	1-1/16		2.44	1.50	1.87	0.63	0.22	0.75	0.13	0.10	1/4-28UNF M6 x 1.0	2.67			
SER206-18	1-1/8														
SER206-19	1-3/16														
SER206-20	1-1/4S														
SER207		35	72	42.9	23.8	17.5	5.6	1.90	3.28	6.4		78.6	25680	15310	1.36
SER207-20	1-1/4		2.83	1.69	0.94	0.69	0.22	0.07	0.13	0.25	5/16-24UNF M8 x 1.0	3.09			
SER207-21	1-5/16														
SER207-22	1-3/8														
SER207-23	1-7/16														
SER208		40	80	49.2	27.8	19.0	6.4	1.90	3.28	8.0		86.6	29540	18150	2.0
SER208-24	1-1/2		3.15	1.94	1.09	1.75	0.25	0.07	0.13	0.32	5/16-24UNF M8 x 1.0	3.41			
SER208-25	1-9/16														
SER209		45	85	49.2	27.8	19.0	6.4	1.90	3.28	8.0		91.6	31700	20690	2.31
SER209-26	1-5/8		3.35	1.94	1.09	0.75	0.25	0.07	0.13	0.13	3/8-24UNF M10 x 1.25	3.60			
SER209-27	1-11/16														
SER209-28	1-3/4														
SER210		50	90	51.6	28.6	19.0	7.5	2.70	3.28	9.5		96.6	35100	23190	2.42
SER210-30	1-7/8		3.54	2.03	1.13	0.75	0.31	0.11	0.13	0.37	3/8-24UNF M10 x 1.25	3.80			
SER210-31	1-15/16														
SER210-32	2S														
SER211		55	100	55.6	30.2	22.2	7.5	2.70	3.28	9.5		106.6	43400	29240	2.99
SER211-32	2		3.94	2.19	1.19	0.87	0.31	0.11	0.13	0.37	3/8-24UNF M10 x 1.25	4.21			
SER211-34	2-1/8														
SER211-35	2-3/16														
SER212		60	110	65.1	31.8	25.4	7.5	2.70	3.28	11.1		116.6	47790	32950	5.57
SER212-36	2-1/4		4.33	2.56	1.25	1.00	0.31	0.12	0.13	0.44	3/8-24UNF M10 x 1.25	4.59			
SER212-38	2-3/8														
SER212-39	2-7/16														
SER213		65	120	65.1	32	25.4	7.9	2.80	4.00	11.1		134.7	57250	40030	6.38
SER213-40	2-1/2		4.72	2.56	1.26	1.00	0.31	0.11	0.16	0.44	3/8-24UNF M10 x 1.25	5.30			
SER215		75	130	77.8	38.1	33.3	10.0	3.10	4.16	12	139.7				
SER215-47	2-15/16		5.12	3.06	1.05	1.31	0.39	0.12	0.16	0.47	3/8-24UNF M10 x 1.25	5.05			
SER215-48	3														