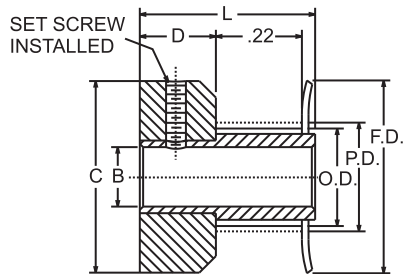
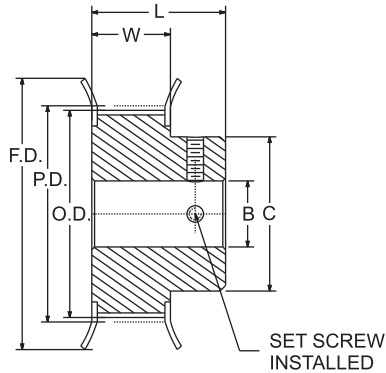


40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 3/16" WIDE BELT


TYPE - 6FC



TYPE - 6F

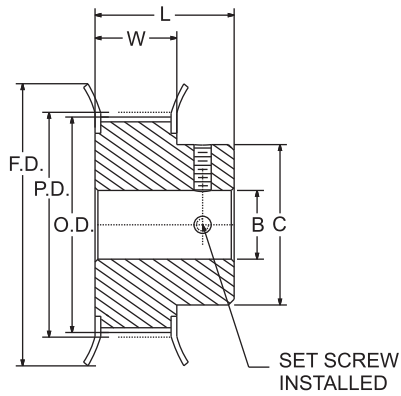


0.0816" PITCH (LT) 3/16" WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
10LT187-6CA-1/8	10	6FC	0.260	0.246	27/64	27/64	1/8	1/8	1/2	17/64	0.234	0.01
11LT187-6CA-1/8	11	6FC	0.286	0.272	29/64	29/64	1/8	1/8	1/2	17/64	0.234	0.01
12LT187-6CA-1/8	12	6FC	0.312	0.298	31/64	31/64	1/8	1/8	1/2	17/64	0.234	0.01
13LT187-6CA-1/8	13	6FC	0.338	0.324	1/2	1/2	1/8	1/8	1/2	17/64	0.234	0.01
14LT187-6CA-1/8	14	6FC	0.364	0.350	17/32	17/32	1/8	1/8	1/2	17/64	0.234	0.01
15LT187-6CA-1/8	15	6FC	0.390	0.376	9/16	9/16	1/8	3/16	1/2	17/64	0.234	0.02
16LT187-6CA-1/8	16	6FC	0.416	0.402	37/64	37/64	1/8	3/16	1/2	17/64	0.234	0.02
18LT187-6FA-1/8	18	6F	0.468	0.454	41/64	5/16	1/8	3/16	9/16	21/64	0.234	0.01
18LT187-6CA-1/4	18	6FC	0.468	0.454	41/64	41/64	1/4	-	1/2	17/64	0.234	0.02
20LT187-6FA-1/8	20	6F	0.520	0.506	11/64	23/64	1/8	3/16	9/16	21/64	0.234	0.02
20LT187-6CA-1/4	20	6FC	0.520	0.506	11/64	11/64	1/4	-	1/2	17/64	0.234	0.02
21LT187-6FA-1/8	21	6F	0.546	0.532	45/64	25/64	1/8	3/16	9/16	21/64	0.234	0.02
21LT187-6CA-1/4	21	6FC	0.546	0.532	45/64	45/64	1/4	-	1/2	17/64	0.234	0.02
22LT187-6FA-1/8	22	6F	0.572	0.558	47/64	25/64	1/8	3/16	9/16	21/64	0.234	0.02
22LT187-6CA-1/4	22	6F	0.572	0.558	47/64	47/64	1/4	-	1/2	17/64	0.234	0.03
24LT187-6FA-3/16	24	6F	0.624	0.610	51/64	7/16	3/16	1/4	5/8	21/64	0.297	0.03
26LT187-6FA-3/16	26	6F	0.676	0.662	27/32	1/2	3/16	1/4	5/8	21/64	0.297	0.05
28LT187-6FA-3/16	28	6F	0.728	0.714	57/64	1/2	3/16	1/4	5/8	21/64	0.297	0.06

Note : Pulleys with 10 to 16 grooves have 1set screw; others have 2 at 90°.

Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size.

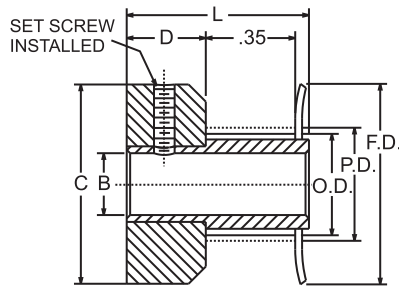
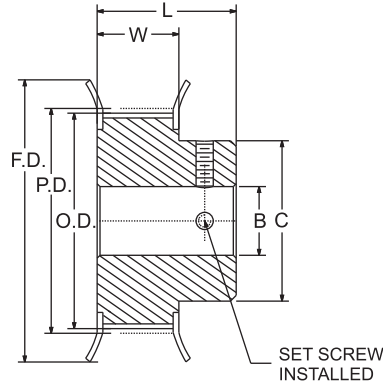
40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 3/16" WIDE BELT

TYPE - 6F


0.0816" PITCH (LT) 3/16" WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
30LT187-6FA-3/16	30	6F	0.780	0.766	15/16	35/64	3/16	1/4	5/8	21/64	0.297	0.07
32LT187-6FA-3/16	32	6F	0.832	0.818	1	19/32	3/16	1/4	5/8	21/64	0.297	0.08
33LT187-6FA-3/16	33	6F	0.858	0.844	1-1/2	5/8	3/16	1/4	5/8	21/64	0.297	0.08
34LT187-6FA-3/16	34	6F	0.884	0.870	1-3/64	5/8	3/16	1/4	5/8	21/64	0.297	0.01
35LT187-6FA-3/16	35	6F	0.910	0.896	1-5/64	21/32	3/16	1/4	5/8	21/64	0.297	0.01
36LT187-6FA-3/16	36	6F	0.936	0.922	1-7/64	43/64	3/16	1/4	5/8	21/64	0.297	0.02
38LT187-6FA-1/4	38	6F	0.988	0.974	1-5/32	47/64	1/4	5/16	5/8	21/64	0.297	0.02
40LT187-6FA-1/4	40	6F	1.040	1.026	1-13/64	3/4	1/4	5/16	21/32	11/32	0.328	0.03
42LT187-6FA-1/4	42	6F	1.092	1.078	1-17/64	13/16	1/4	5/16	21/32	11/32	0.328	0.04
44LT187-6FA-1/4	44	6F	1.144	1.130	1-5/16	55/64	1/4	5/16	21/32	11/32	0.328	0.05
45LT187-6FA-1/4	45	6F	1.170	1.156	1-11/32	57/64	1/4	5/16	21/32	11/32	0.328	0.06
48LT187-6FA-1/4	48	6F	1.248	1.234	1-27/64	15/16	1/4	5/16	21/32	11/32	0.328	0.02
50LT187-6FA-1/4	50	6F	1.300	1.286	1-15/32	63/64	1/4	5/16	21/32	11/32	0.328	0.02
54LT187-6FA-1/4	54	6F	1.404	1.390	1-37/64	1-1/16	1/4	5/16	21/32	11/32	0.328	0.03
60LT187-6FA-1/4	60	6F	1.560	1.546	1-47/64	1-7/32	1/4	5/16	21/32	11/32	0.328	0.03

Note : All Pulley have 2 set screw at 90°.

Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size.

40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 5/16" WIDE BELT

TYPE - 6FC

TYPE - 6F


0.0816" PITCH (LT) 5/16" WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
10LT312-6CA-1/8	10	6FC	0.260	0.246	27/64	27/64	1/8	1/8	5/8	25/64	0.234	0.01
11LT312-6CA-1/8	11	6FC	0.286	0.272	29/64	29/64	1/8	1/8	5/8	25/64	0.234	0.01
12LT312-6CA-1/8	12	6FC	0.312	0.298	31/64	31/64	1/8	1/8	5/8	25/64	0.234	0.01
13LT312-6CA-1/8	13	6FC	0.338	0.324	1/2	1/2	1/8	1/8	5/8	25/64	0.234	0.01
14LT312-6CA-1/8	14	6FC	0.364	0.350	17/32	17/32	1/8	1/8	5/8	25/64	0.234	0.01
15LT312-6CA-1/8	15	6FC	0.390	0.376	9/16	9/16	1/8	3/16	5/8	25/64	0.234	0.01
16LT312-6CA-1/8	16	6FC	0.416	0.402	37/64	37/64	1/8	3/16	5/8	25/64	0.234	0.01
18LT312-6FA-1/8	18	6F	0.468	0.454	41/64	5/16	1/8	3/16	11/16	29/64	0.234	0.01
18LT312-6CA-1/4	18	6FC	0.468	0.454	41/64	41/64	1/4	-	5/8	0.397	0.234	0.01
20LT312-6FA-1/8	20	6F	0.520	0.506	11/16	23/64	1/8	3/16	11/16	29/64	0.234	0.01
20LT312-6CA-1/4	20	6FC	0.520	0.506	11/16	11/16	1/4	-	5/8	0.397	0.234	0.01
21LT312-6FA-1/8	21	6F	0.546	0.532	41/64	25/64	1/8	3/16	11/16	29/64	0.234	0.01
21LT312-6CA-1/4	21	6FC	0.546	0.532	41/64	41/64	1/4	-	5/8	0.397	0.234	0.01
22LT312-6FA-1/8	22	6F	0.572	0.558	47/64	25/64	1/8	3/16	11/16	29/64	0.234	0.01
22LT312-6CA-1/4	22	6FC	0.572	0.558	47/64	47/64	1/4	-	5/8	0.397	0.234	0.02
24LT312-6FA-3/16	24	6F	0.624	0.610	51/64	7/16	3/16	1/4	3/4	29/64	0.297	0.02
26LT312-6FA-3/16	26	6F	0.676	0.662	27/32	1/2	3/16	1/4	3/4	29/64	0.297	0.02
28LT312-6FA-3/16	28	6F	0.728	0.714	57/64	1/2	3/16	1/4	3/4	29/64	0.297	0.02

Note : Pulleys with 10 to 16 grooves have 1set screw; others have 2 at 90° .

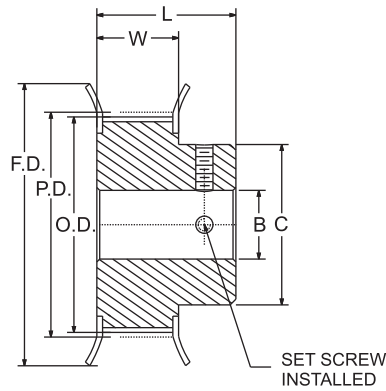
Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size.

40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH

**ALUMINUM
CLEAR ANODIZED**

FOR 5/16" WIDE BELT



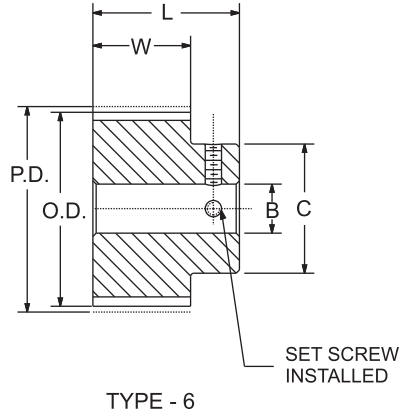
TYPE - 6F

0.0816" PITCH (LT) 5/16" WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
30LT312-6FA-3/16	30	6F	0.780	0.766	15/16	35/64	3/16	1/4	3/4	29/64	0.297	0.01
32LT312-6FA-3/16	32	6F	0.832	0.818	1	19/32	3/16	1/4	3/4	29/64	0.297	0.01
33LT312-6FA-3/16	33	6F	0.858	0.844	1-1/2	5/8	3/16	1/4	3/4	29/64	0.297	0.01
34LT312-6FA-3/16	34	6F	0.884	0.870	1-3/64	5/8	3/16	1/4	3/4	29/64	0.297	0.01
35LT312-6FA-3/16	35	6F	0.910	0.896	1-5/64	21/32	3/16	1/4	3/4	29/64	0.297	0.01
36LT312-6FA-3/16	36	6F	0.936	0.922	1-7/64	43/64	3/16	1/4	3/4	29/64	0.297	0.01
38LT312-6FA-1/4	38	6F	0.988	0.974	1-5/32	47/64	1/4	5/16	3/4	29/64	0.297	0.01
40LT312-6FA-1/4	40	6F	1.040	1.026	1-13/64	3/4	1/4	5/16	25/32	15/32	0.313	0.01
42LT312-6FA-1/4	42	6F	1.092	1.078	1-17/64	13/16	1/4	5/16	25/32	15/32	0.313	0.02
44LT312-6FA-1/4	44	6F	1.144	1.130	1-5/16	55/64	1/4	5/16	25/32	15/32	0.313	0.02
45LT312-6FA-1/4	45	6F	1.170	1.156	1-11/32	57/64	1/4	5/16	25/32	15/32	0.313	0.03
48LT312-6FA-1/4	48	6F	1.248	1.234	1-27/64	15/16	1/4	5/16	25/32	15/32	0.313	0.03
50LT312-6FA-1/4	50	6F	1.300	1.286	1-15/32	63/64	1/4	5/16	25/32	15/32	0.313	0.02
54LT312-6FA-1/4	54	6F	1.404	1.390	1-37/64	1-1/16	1/4	5/16	25/32	15/32	0.313	0.03
60LT312-6FA-1/4	60	6F	1.560	1.546	1-47/64	1-7/32	1/4	5/16	25/32	15/32	0.313	0.03

Note : All Pulley have 2 set screw at 90°.

Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size.

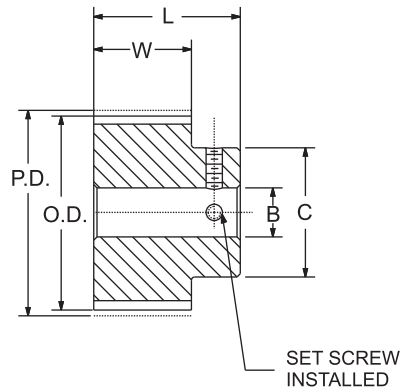
40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 3/16" WIDE BELT


0.0816" PITCH (LT) 3/16" WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
20LT187-6A-3/16	20	6	0.520	0.506	-	7/16	3/16	1/4	3/4	3/8	0.375	0.01
24LT187-6A-3/16	24	6	0.624	0.610	-	1/2	3/16	1/4	3/4	3/8	0.375	0.01
30LT187-6A-1/4	30	6	0.780	0.766	-	21/32	1/4	1/4	3/4	3/8	0.375	0.01
40LT187-6A-1/4	40	6	1.040	1.026	-	43/64	1/4	1/4	3/4	3/8	0.375	0.02
45LT187-6A-1/4	45	6	1.170	1.156	-	51/64	1/4	1/4	3/4	3/8	0.375	0.02
50LT187-6A-1/4	50	6	1.300	1.286	-	59/64	1/4	5/16	3/4	3/8	0.375	0.03
60LT187-6A-1/4	60	6	1.560	1.546	-	1-3/16	1/4	5/16	3/4	3/8	0.375	0.04
70LT187-6A-1/4	70	6	1.820	1.806	-	1-5/32	1/4	3/8	3/4	3/8	0.375	0.05
72LT187-6A-1/4	72	6	1.872	1.858	-	1-13/64	1/4	3/8	3/4	3/8	0.375	0.05
75LT187-6A-1/4	75	6	1.950	1.936	-	1-17/64	1/4	3/8	3/4	3/8	0.375	0.05
80LT187-6A-1/4	80	6	2.080	2.066	-	1-25/64	1/4	3/8	3/4	3/8	0.375	0.06
84LT187-6A-1/4	84	6	2.184	2.170	-	1-1/2	1/4	3/8	3/4	3/8	0.375	0.07
88LT187-6A-1/4	88	6	2.288	2.274	-	1-1/2	1/4	3/8	3/4	3/8	0.375	0.07
90LT187-6A-1/4	90	6	2.340	2.326	-	1-1/2	1/4	3/8	3/4	3/8	0.375	0.08
96LT187-6A-1/4	96	6	2.496	2.482	-	1-1/2	1/4	3/8	3/4	3/8	0.375	0.09
98LT187-6A-1/4	98	6	2.548	2.534	-	1-1/2	1/4	3/8	3/4	3/8	0.375	0.09
100LT187-6A-5/16	100	6	2.600	2.586	-	1-1/2	5/16	3/8	3/4	3/8	0.375	0.09
108LT187-6A-5/16	108	6	2.808	2.794	-	1-1/2	5/16	3/8	3/4	3/8	0.375	0.11
120LT187-6A-5/16	120	6	3.120	3.106	-	1-1/2	5/16	3/8	3/4	3/8	0.375	0.13

Note : All Pulley have 2 set screw at 90°.

Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size.

40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 5/16" WIDE BELT

TYPE - 6


0.0816"PITCH (LT) 5/16" WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
20LT312-6A-3/16	20	6	0.520	0.506	-	7/16	3/16	1/4	7/8	1/2	0.375	0.01
24LT312-6A-3/16	24	6	0.624	0.610	-	1/2	3/16	1/4	7/8	1/2	0.375	0.01
30LT312-6A-1/4	30	6	0.780	0.766	-	21/32	1/4	1/4	7/8	1/2	0.375	0.01
40LT312-6A-1/4	40	6	1.040	1.026	-	43/64	1/4	1/4	7/8	1/2	0.375	0.02
45LT312-6A-1/4	45	6	1.170	1.156	-	51/64	1/4	1/4	7/8	1/2	0.375	0.02
50LT312-6A-1/4	50	6	1.300	1.286	-	59/64	1/4	5/16	7/8	1/2	0.375	0.02
60LT312-6A-1/4	60	6	1.560	1.546	-	1-3/16	1/4	5/16	7/8	1/2	0.375	0.04
70LT312-6A-1/4	70	6	1.820	1.806	-	1-5/32	1/4	5/16	7/8	1/2	0.375	0.05
72LT312-6A-1/4	72	6	1.872	1.858	-	1-13/64	1/4	3/8	7/8	1/2	0.375	0.05
75LT312-6A-1/4	75	6	1.950	1.936	-	1-17/64	1/4	3/8	7/8	1/2	0.375	0.05
80LT312-6A-1/4	80	6	2.080	2.066	-	1-25/64	1/4	3/8	7/8	1/2	0.375	0.06
84LT312-6A-1/4	84	6	2.184	2.170	-	1-1/2	1/4	3/8	7/8	1/2	0.375	0.07
88LT312-6A-1/4	88	6	2.288	2.274	-	1-1/2	1/4	3/8	7/8	1/2	0.375	0.07
90LT312-6A-1/4	90	6	2.340	2.326	-	1-1/2	1/4	3/8	7/8	1/2	0.375	0.08
96LT312-6A-1/4	96	6	2.496	2.482	-	1-1/2	1/4	3/8	7/8	1/2	0.375	0.09
98LT312-6A-1/4	98	6	2.548	2.534	-	1-1/2	1/4	3/8	7/8	1/2	0.375	0.09
100LT312-6A-5/16	100	6	2.600	2.586	-	1-1/2	5/16	3/8	7/8	1/2	0.375	0.09
108LT312-6A-5/16	108	6	2.808	2.794	-	1-1/2	5/16	3/8	7/8	1/2	0.375	0.11
110LT312-6A-3/8	110	6	2.86	2.846	-	1-1/2	3/8	3/8	7/8	1/2	0.375	0.11
120LT312-6A-5/16	120	6	3.12	3.106	-	1-1/2	5/16	3/8	7/8	1/2	0.375	0.13
130LT312-6A-3/8	130	6	3.38	3.366	-	1-5/8	3/8	3/8	7/8	1/2	0.375	0.15
140LT312-6A-3/8	140	6	3.64	3.626	-	1-3/4	3/8	3/8	7/8	1/2	0.375	0.18
150LT312-6A-3/8	150	6	3.90	3.886	-	2	3/8	3/8	7/8	1/2	0.375	0.20

Note : All Pulley have 2 set screw at 90°.

Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size.