


40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH

ALUMINUM

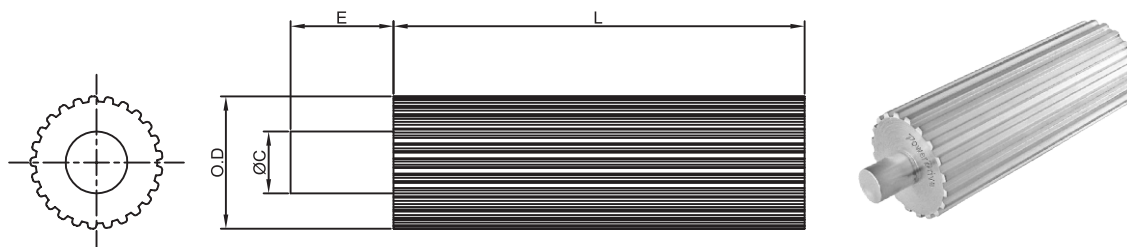


40D.P. Timing Pulley Stock - 0.0816" Pitch						
PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (In Inch)	C Shank Diameter	Shank Length (In Inch)
10-LT-PS2A	10	0.260"	0.250"	2	0.19	1.00"
11-LT-PS2A	11	0.286"	0.270"	2	0.19	1.00"
12-LT-PS2A	12	0.312"	0.300"	2	0.19	1.00"
13-LT-PS2A	13	0.338"	0.320"	2	0.25	1.00"
14-LT-PS2A	14	0.364"	0.350"	2	0.25	1.00"
15-LT-PS3A	15	0.390"	0.380"	3	0.31	1.00"
16-LT-PS3A	16	0.416"	0.400"	3	0.31	1.00"
17-LT-PS3A	17	0.442"	0.430"	3	0.31	1.00"
18-LT-PS3A	18	0.468"	0.450"	3	0.38	1.00"
19-LT-PS3A	19	0.494"	0.480"	3	0.38	1.00"
20-LT-PS4A	20	0.520"	0.510"	4	0.38	0.88"
21-LT-PS4A	21	0.546"	0.530"	4	0.38	0.88"
22-LT-PS4A	22	0.572"	0.560"	4	0.38	0.88"
23-LT-PS4A	23	0.598"	0.580"	4	0.38	0.88"
24-LT-PS5A	24	0.624"	0.610"	5	0.50	0.75"
25-LT-PS5A	25	0.650"	0.640"	5	0.50	0.75"
26-LT-PS5A	26	0.676"	0.660"	5	0.50	0.75"
27-LT-PS5A	27	0.702"	0.690"	5	0.50	0.75"
28-LT-PS5A	28	0.728"	0.710"	5	0.50	0.75"
29-LT-PS5A	29	0.754"	0.740"	5	0.50	0.75"
30-LT-PS6A	30	0.780"	0.770"	6	0.50	0.75"
31-LT-PS6A	31	0.806"	0.790"	6	0.50	0.75"
32-LT-PS6A	32	0.832"	0.820"	6	0.50	0.75"
33-LT-PS6A	33	0.858"	0.840"	6	0.50	0.75"
34-LT-PS6A	34	0.884"	0.870"	6	0.50	0.75"
35-LT-PS6A	35	0.910"	0.896"	6	0.50	0.75"
36-LT-PS6A	36	0.936"	0.922"	6	0.50	0.75"
37-LT-PS6A	37	0.962"	0.948"	6	0.50	0.75"
38-LT-PS6A	38	0.988"	0.974"	6	0.50	0.75"
39-LT-PS6A	39	1.014"	1.000"	6	0.50	0.75"
40-LT-PS7A	40	1.040"	1.030"	7	0.50	0.75"

Note : Shank may or may not be available in some cases.

40 D.P. (LT) TIMING BELT PULLEY - 0.0816" PITCH

ALUMINUM

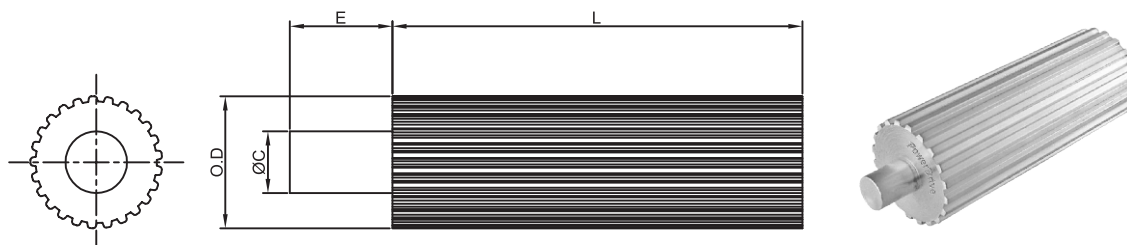

40D.P. Timing Pulley Stock - 0.0816" Pitch						
PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (In Inch)	C Shank Diameter	Shank Length (In Inch)
42-LT-PS7A	42	1.092"	1.080"	7	0.50	0.75"
44-LT-PS7A	44	1.144"	1.130"	7	0.50	0.75"
45-LT-PS7A	45	1.170"	1.160"	7	0.50	0.75"
48-LT-PS7A	48	1.248"	1.230"	7	0.50	0.75"
49-LT-PS7A	49	1.274"	1.260"	7	0.50	0.75"
50-LT-PS7A	50	1.300"	1.290"	7	0.50	0.75"
51-LT-PS7A	51	1.326"	1.310"	7	0.50	0.75"
52-LT-PS7A	52	1.352"	1.340"	7	0.50	0.75"
54-LT-PS7A	54	1.404"	1.390"	7	0.50	0.75"
55-LT-PS7A	55	1.430"	1.420"	7	0.50	0.75"
56-LT-PS7A	56	1.456"	1.440"	7	0.50	0.75"
57-LT-PS7A	57	1.482"	1.470"	7	0.50	0.75"
60-LT-PS8A	60	1.560"	1.550"	8	0.50	0.75"
64-LT-PS8A	64	1.664"	1.650"	8	0.50	0.75"
65-LT-PS8A	65	1.690"	1.680"	8	0.50	0.75"
66-LT-PS8A	66	1.716"	1.700"	8	0.50	0.75"
70-LT-PS8A	70	1.820"	1.810"	8	0.50	0.75"
72-LT-PS8A	72	1.872"	1.860"	8	0.50	0.75"
75-LT-PS8A	75	1.950"	1.940"	8	0.50	0.75"
80-LT-PS8A	80	2.080"	2.070"	8	0.75	0.75"
82-LT-PS8A	82	2.132"	2.120"	8	0.75	0.75"
84-LT-PS8A	84	2.184"	2.170"	8	0.75	0.75"
88-LT-PS8A	88	2.288"	2.270"	8	0.75	0.75"
90-LT-PS8A	90	2.340"	2.330"	8	0.75	0.75"
96-LT-PS8A	96	2.496"	2.480"	8	0.75	0.75"
98-LT-PS8A	98	2.548"	2.530"	8	0.75	0.75"
100-LT-PS8A	100	2.600"	2.590"	8	0.75	0.75"
102-LT-PS8A	102	2.652"	2.640"	8	0.75	0.75"
108-LT-PS8A	108	2.808"	2.790"	8	0.75	0.75"
110-LT-PS8A	110	2.860"	2.850"	8	0.75	0.75"
120-LT-PS8A	120	3.120"	3.106"	8	0.75	0.75"
130-LT-PS8A	130	3.380"	3.366"	8	0.75	0.75"
140-LT-PS8A	140	3.640"	3.626"	8	0.75	0.75"
150-LT-PS8A	150	3.900"	3.886"	8	0.75	0.75"

Note : Shank may or may not be available in some cases.