


**TIMING PULLEY Stock - AT5MM PITCH**

**ALUMINUM**

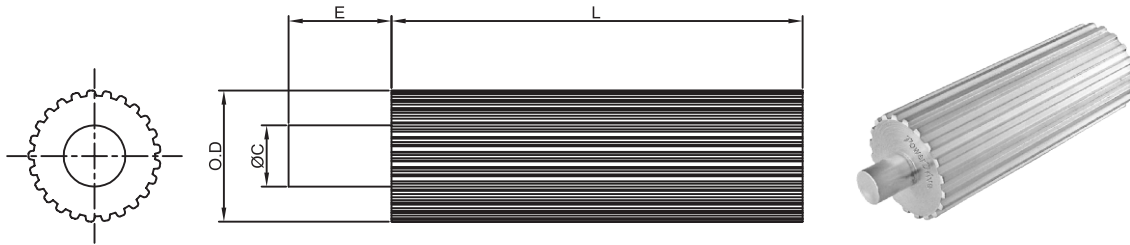

Timing Pulley Stock - AT5 Pitch						
PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (IN MM)	C Shank Diameter	E Shank Length (In Inch)
12-AT5-PS140A	12	0.752	0.703	139.70	0.50	0.80
13-AT5-PS140A	13	0.814	0.766	139.70	0.50	0.80
14-AT5-PS140A	14	0.877	0.829	139.70	0.50	0.80
15-AT5-PS140A	15	0.940	0.892	139.70	0.50	0.80
16-AT5-PS140A	16	1.002	0.953	139.70	0.50	0.80
17-AT5-PS140A	17	1.065	1.016	139.70	0.50	0.80
18-AT5-PS140A	18	1.128	1.079	139.70	0.50	0.80
19-AT5-PS140A	19	1.190	1.142	139.70	0.50	0.80
20-AT5-PS160A	20	1.253	1.205	160.02	0.50	0.80
21-AT5-PS160A	21	1.315	1.272	160.02	0.50	0.80
22-AT5-PS160A	22	1.378	1.333	160.02	0.50	0.80
23-AT5-PS160A	23	1.441	1.396	160.02	0.50	0.80
24-AT5-PS160A	24	1.504	1.457	160.02	0.50	0.80
25-AT5-PS160A	25	1.566	1.520	160.02	0.50	0.80
26-AT5-PS160A	26	1.628	1.583	160.02	0.50	0.80
27-AT5-PS160A	27	1.691	1.646	160.02	0.50	0.80
28-AT5-PS160A	28	1.754	1.707	160.02	0.50	0.80
29-AT5-PS160A	29	1.817	1.770	160.02	0.50	0.80
30-AT5-PS160A	30	1.880	1.833	160.02	0.75	0.80
31-AT5-PS160A	31	1.941	1.896	160.02	0.75	0.80
32-AT5-PS160A	32	2.005	1.957	160.02	0.75	0.80
33-AT5-PS160A	33	2.067	2.020	160.02	0.75	0.80
34-AT5-PS160A	34	2.130	2.081	160.02	0.75	0.80
35-AT5-PS160A	35	2.193	2.144	160.02	0.75	0.80
36-AT5-PS160A	36	2.255	2.207	160.02	0.75	0.80
38-AT5-PS160A	38	2.381	2.333	160.02	0.75	0.80
40-AT5-PS160A	40	2.506	2.459	160.02	0.75	0.80
42-AT5-PS160A	42	2.630	2.583	160.02	0.75	0.80
44-AT5-PS160A	44	2.756	2.709	160.02	0.75	0.80
45-AT5-PS160A	45	2.819	2.772	160.02	0.75	0.80
46-AT5-PS160A	46	2.882	2.835	160.02	0.75	0.80
48-AT5-PS160A	48	3.004	2.959	160.02	0.75	0.80
50-AT5-PS160A	50	3.130	3.085	160.02	1.00	1.00
52-AT5-PS160A	52	3.256	3.211	160.02	1.00	1.00
54-AT5-PS160A	54	3.382	3.335	160.02	1.00	1.00
55-AT5-PS160A	55	3.445	3.398	160.02	1.00	1.00
56-AT5-PS160A	56	3.508	3.461	160.02	1.00	1.00
58-AT5-PS160A	58	3.634	3.587	160.02	1.00	1.00
60-AT5-PS160A	60	3.756	3.711	160.02	1.00	1.00
62-AT5-PS160A	62	3.882	3.837	160.02	1.00	1.00
64-AT5-PS160A	64	4.008	3.963	160.02	1.00	1.00
65-AT5-PS160A	65	4.073	4.026	160.02	1.00	1.00
70-AT5-PS160A	70	4.386	4.339	160.02	1.00	1.00
72-AT5-PS160A	72	4.508	4.463	160.02	1.00	1.00

Note : Shank may or may not be available in some cases.