




GT2® TIMING BELT PULLEY 3MM PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 6MM WIDE BELT


Type - 6C



Type - 6F




TYPE - 6




3MM PITCH (GT2®) 6MM WIDE BELTS													
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/ GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
3MR-16S-06	16-3MGT-06-6CA	16	6C	0.602	0.572	45/64	45/64	0.187	0.250	9/16	-	15/64	0.01
3MR-17S-06	17-3MGT-06-6CA	17	6C	0.639	0.609	47/64	47/64	0.187	0.250	9/16	-	15/64	0.01
3MR-18S-06	18-3MGT-06-6FA	18	6F	0.677	0.647	1/64	7/16	0.250	0.250	11/16	25/64	19/64	0.01
3MR-19S-06	19-3MGT-06-6FA	19	6F	0.714	0.684	13/16	15/32	0.250	0.250	11/16	25/64	19/64	0.02
3MR-20S-06	20-3MGT-06-6FA	20	6F	0.752	0.722	57/64	1/2	0.250	0.250	11/16	25/64	19/64	0.02
3MR-21S-06	21-3MGT-06-6FA	21	6F	0.790	0.760	57/64	1/2	0.250	0.250	11/16	25/64	19/64	0.02
3MR-22S-06	22-3MGT-06-6FA	22	6F	0.827	0.797	15/16	9/16	0.250	0.312	11/16	25/64	19/64	0.02
3MR-24S-06	24-3MGT-06-6FA	24	6F	0.902	0.872	1-1/32	5/8	0.250	0.375	11/16	25/64	19/64	0.03
3MR-25S-06	25-3MGT-06-6FA	25	6F	0.940	0.910	1-1/16	5/8	0.250	0.375	11/16	25/64	19/64	0.03
3MR-26S-06	26-3MGT-06-6FA	26	6F	0.977	0.947	1-7/64	5/8	0.250	0.375	11/16	25/64	19/64	0.03
3MR-28S-06	28-3MGT-06-6FA	28	6F	1.053	1.023	1-1/64	5/8	0.250	0.500	11/16	25/64	19/64	0.04
3MR-30S-06	30-3MGT-06-6FA	30	6F	1.128	1.098	1-1/4	59/64	0.250	0.563	11/16	25/64	19/64	0.04
3MR-32S-06	32-3MGT-06-6FA	32	6F	1.203	1.173	1-21/64	1	0.250	0.629	11/16	25/64	19/64	0.04
3MR-34S-06	34-3MGT-06-6FA	34	6F	1.278	1.248	1-25/64	1-5/64	0.250	0.687	23/32	13/62	5/16	0.06
3MR-34S-06	34-3MGT-06-6A	34	6	1.278	1.248	-	59/64	0.250	0.687	23/32	-	5/16	0.06
3MR-36S-06	36-3MGT-06-6FA	36	6F	1.353	1.323	1-15/32	1-5/32	0.250	0.750	23/32	13/62	5/16	0.07
3MR-36S-06	36-3MGT-06-6A	36	6	1.353	1.323	-	1	0.250	0.750	23/32	-	5/16	0.07
3MR-38S-06	38-3MGT-06-6FA	38	6F	1.429	1.399	1-35/64	1-19/64	0.250	0.875	23/32	13/62	5/16	0.08
3MR-38S-06	38-3MGT-06-6A	38	6	1.429	1.399	-	1-5/64	0.250	0.875	23/32	-	5/16	0.08
3MR-40S-06	40-3MGT-06-6FA	40	6F	1.504	1.474	1-5/8	45/64	0.250	0.937	23/32	13/62	5/16	0.08
3MR-40S-06	40-3MGT-06-6A	40	6	1.504	1.474	-	1-5/32	0.250	0.937	23/32	-	5/16	0.08
3MR-44S-06	44-3MGT-06-6FA	44	6F	1.654	1.624	1-25/32	25/32	0.250	1.000	23/32	13/62	5/16	0.12
3MR-44S-06	44-3MGT-06-6A	44	6	1.654	1.624	-	1-19/64	0.250	1.000	23/32	-	5/16	0.12
3MR-45S-06	45-3MGT-06-6FA	45	6F	1.692	1.662	1-25/32	27/32	0.250	1.000	23/32	13/62	5/16	0.12
3MR-45S-06	45-3MGT-06-6A	45	6	1.692	1.662	-	1-19/64	0.312	1.000	47/64	-	21/64	0.12
3MR-48S-06	48-3MGT-06-6A	48	6	1.805	1.775	-	1-1/4	0.312	1.000	47/64	-	21/64	0.13
3MR-50S-06	50-3MGT-06-6A	50	6	1.880	1.850	-	1-1/4	0.312	1.000	47/64	-	21/64	0.14
3MR-56S-06	56-3MGT-06-6A	56	6	2.105	2.075	-	1-1/4	0.312	1.000	47/64	-	21/64	0.16
3MR-60S-06	60-3MGT-06-6A	60	6	2.256	2.226	-	1-1/4	0.312	1.000	47/64	-	21/64	0.18
3MR-62S-06	62-3MGT-06-6A	62	6	2.331	2.301	-	1-1/4	0.312	1.000	47/64	-	21/64	0.19
3MR-68S-06	68-3MGT-06-6A	68	6	2.557	2.527	-	1-1/4	0.312	1.000	47/64	-	21/64	0.23
3MR-72S-06	72-3MGT-06-6A	72	6	2.707	2.677	-	1-1/4	0.312	1.000	47/64	-	21/64	0.25
3MR-80S-06	80-3MGT-06-6A	80	6	3.008	2.978	-	1-1/4	0.312	1.000	47/64	-	21/64	0.31


Note : All pulleys have 2 set screws at 90°.

GT2® TIMING BELT PULLEY 3MM PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 9MM WIDE BELT


Type - 6C



Type - 6F



TYPE - 6




3MM PITCH (GT2®) 9MM WIDE BELTS													
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/ GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
3MR-16S-09	16-3MGT-09-6CA	16	6C	0.602	0.572	45/64	45/64	0.187	0.250	11/16	-	15/64	0.02
3MR-17S-09	17-3MGT-09-6CA	17	6C	0.639	0.609	47/64	47/64	0.187	0.250	11/16	-	19/64	0.02
3MR-18S-09	18-3MGT-09-6FA	18	6F	0.677	0.647	1/64	7/16	0.250	0.250	13/16	1/2	19/64	0.02
3MR-19S-09	19-3MGT-09-6FA	19	6F	0.714	0.684	13/16	15/32	0.250	0.250	13/16	1/2	19/64	0.02
3MR-20S-09	20-3MGT-09-6FA	20	6F	0.752	0.722	57/64	1/2	0.250	0.250	13/16	1/2	19/64	0.02
3MR-21S-09	21-3MGT-09-6FA	21	6F	0.790	0.760	57/64	1/2	0.250	0.250	13/16	1/2	19/64	0.02
3MR-22S-09	22-3MGT-09-6FA	22	6F	0.827	0.797	15/16	9/16	0.250	0.312	13/16	1/2	19/64	0.02
3MR-24S-09	24-3MGT-09-6FA	24	6F	0.902	0.872	1-1/32	5/8	0.250	0.375	13/16	1/2	19/64	0.02
3MR-25S-09	25-3MGT-09-6FA	25	6F	0.940	0.910	1-1/16	5/8	0.250	0.375	13/16	1/2	19/64	0.04
3MR-26S-09	26-3MGT-09-6FA	26	6F	0.977	0.947	1-7/64	5/8	0.250	0.375	13/16	1/2	19/64	0.02
3MR-28S-09	28-3MGT-09-6FA	28	6F	1.053	1.023	1-1/64	5/8	0.250	0.500	13/16	1/2	19/64	0.02
3MR-30S-09	30-3MGT-09-6FA	30	6F	1.128	1.098	1-1/4	59/64	0.250	0.563	13/16	1/2	19/64	0.02
3MR-32S-09	32-3MGT-09-6FA	32	6F	1.203	1.173	1-21/64	1	0.250	0.629	13/16	1/2	19/64	0.02
3MR-34S-09	34-3MGT-09-6FA	34	6F	1.278	1.248	1-25/64	1-5/64	0.250	0.687	27/32	17/32	5/16	0.02
3MR-34S-09	34-3MGT-09-6A	34	6	1.278	1.248	-	59/64	0.250	0.687	27/32	17/32	5/16	0.02
3MR-36S-09	36-3MGT-09-6FA	36	6F	1.353	1.323	1-15/32	1-5/32	0.250	0.750	27/32	17/32	5/16	0.02
3MR-36S-09	36-3MGT-09-6A	36	6	1.353	1.323	-	1	0.250	0.750	27/32	17/32	5/16	0.02
3MR-38S-09	38-3MGT-09-6FA	38	6F	1.429	1.399	1-35/64	1-19/64	0.250	0.875	27/32	17/32	5/16	0.03
3MR-38S-09	38-3MGT-09-6A	38	6	1.429	1.399	-	1-5/64	0.250	0.875	27/32	17/32	5/16	0.03
3MR-40S-09	40-3MGT-09-6FA	40	6F	1.504	1.474	1-5/8	45/64	0.250	0.937	27/32	17/32	5/16	0.09
3MR-40S-09	40-3MGT-09-6A	40	6	1.504	1.474	-	1-5/32	0.250	0.937	27/32	17/32	5/16	0.09
3MR-44S-09	44-3MGT-09-6FA	44	6F	1.654	1.624	1-25/32	25/32	0.250	1.000	27/32	17/32	5/16	0.12
3MR-44S-09	44-3MGT-09-6A	44	6	1.654	1.624	-	1-19/64	0.250	1.000	27/32	17/32	5/16	0.12
3MR-45S-09	45-3MGT-09-6FA	45	6F	1.692	1.662	1-25/32	27/32	0.250	1.000	27/32	17/32	5/16	0.09
3MR-45S-09	45-3MGT-09-6A	45	6	1.692	1.662	-	1-19/64	0.312	1.000	7/8	1/2	3/8	0.09
3MR-48S-09	48-3MGT-09-6A	48	6	1.805	1.775	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.15
3MR-50S-09	50-3MGT-09-6A	50	6	1.880	1.850	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.15
3MR-56S-09	56-3MGT-09-6A	56	6	2.105	2.075	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.11
3MR-60S-09	60-3MGT-09-6A	60	6	2.256	2.226	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.22
3MR-62S-09	62-3MGT-09-6A	62	6	2.331	2.301	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.12
3MR-68S-09	68-3MGT-09-6A	68	6	2.557	2.527	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.30
3MR-72S-09	72-3MGT-09-6A	72	6	2.707	2.677	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.31
3MR-80S-09	80-3MGT-09-6A	80	6	3.008	2.978	-	1-1/4	0.312	1.000	7/8	1/2	3/8	0.16

Note : All pulleys have 2 set screws at 90°.

GT2® TIMING BELT PULLEY 3MM PITCH

ALUMINUM
CLEAR ANODIZED

FOR 15MM WIDE BELT

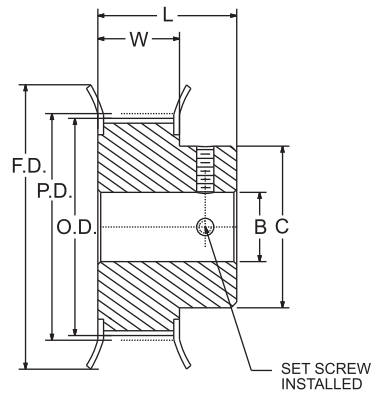

TYPE - 6F

3MM PITCH (GT2®) 15MM WIDE BELTS												
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/ GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"	
3MR-16A-15	16-5MGT15-6C	16	6C	0.602	0.572	45/64	45/64	0.187	0.250	59/64	11/16	0.02
3MR-17A-15	17-5MGT15-6C	17	6C	0.639	0.609	47/64	45/64	0.187	0.250	59/64	11/16	0.02
3MR-18A-15	18-5MGT15-6F	18	6F	0.677	0.647	1/64	7/16	0.250	0.250	1-1/16	47/64	0.02
3MR-19A-15	19-5MGT15-6F	19	6F	0.714	0.684	13/16	15/32	0.250	0.250	1-1/16	47/64	0.02
3MR-20A-15	20-5MGT15-6F	20	6F	0.752	0.722	57/64	1/2	0.250	0.250	1-1/16	47/64	0.02
3MR-21A-15	21-5MGT15-6F	21	6F	0.790	0.760	57/64	1/2	0.250	0.250	1-1/16	47/64	0.02
3MR-22A-15	22-5MGT15-6F	22	6F	0.827	0.797	15/16	19/16	0.250	0.312	1-1/16	47/64	0.02
3MR-24A-15	24-5MGT15-6F	24	6F	0.902	0.872	1-1/32	5/8	0.250	0.375	1-1/16	47/64	0.02
3MR-25A-15	25-5MGT15-6F	25	6F	0.940	0.910	1-1/16	5/8	0.250	0.375	1-1/16	47/64	0.05
3MR-26A-15	26-5MGT15-6F	26	6F	0.977	0.947	1-7/64	5/8	0.250	0.375	1-1/16	47/64	0.02
3MR-28A-15	28-5MGT15-6F	28	6F	1.053	1.023	1-1/64	45/64	0.250	0.500	1-1/16	47/64	0.02
3MR-30A-15	30-5MGT15-6F	30	6F	1.128	1.098	1-1/4	25/32	0.250	0.563	1-1/16	47/64	0.02
3MR-32A-15	32-5MGT15-6F	32	6F	1.203	1.173	1-21/64	27/32	0.250	0.629	1-1/16	47/64	0.02
3MR-34A-15	34-5MGT15-6F	34	6F	1.278	1.248	1-25/64	59/64	0.250	0.687	1-1/16	47/64	0.02
3MR-36A-15	36-5MGT15-6F	36	6F	1.353	1.323	1-15/32	1	0.250	0.750	1-1/16	47/64	0.02
3MR-38A-15	38-5MGT15-6F	38	6F	1.429	1.399	1-35/64	5/64	0.250	0.875	1-1/16	47/64	0.15
3MR-40A-15	40-5MGT15-6F	40	6F	1.504	1.474	1-5/8	5/32	0.250	0.937	1-1/16	47/64	0.09
3MR-44A-15	44-5MGT15-6F	44	6F	1.654	1.624	1-25/32	19/64	0.250	1.000	1-1/16	47/64	0.18
3MR-45A-15	45-5MGT15-6	45	6	1.692	1.662	1-25/32	1-1/4	0.250	1.000	1-1/16	47/64	0.09
3MR-48A-15	48-5MGT15-6	48	6	1.805	1.775	-	1-1/4	0.312	1.000	1-7/64	47/64	0.21
3MR-50A-15	50-5MGT15-6	50	6	1.880	1.850	-	1-1/4	0.312	1.000	1-7/64	47/64	0.10
3MR-56A-15	56-5MGT15-6	56	6	2.105	2.075	-	1-1/4	0.312	1.000	1-7/64	47/64	0.30
3MR-60A-15	60-5MGT15-6	60	6	2.256	2.226	-	1-1/4	0.312	1.000	1-7/64	47/64	0.30
3MR-62A-15	62-5MGT15-6	62	6	2.331	2.301	-	1-1/4	0.312	1.000	1-7/64	47/64	0.35
3MR-68A-15	68-5MGT15-6	68	6	2.557	2.527	-	1-1/4	0.312	1.000	1-7/64	47/64	0.12
3MR-72A-15	72-5MGT15-6	72	6	2.707	2.677	-	1-1/4	0.312	1.000	1-7/64	47/64	0.43
3MR-74A-15	74-5MGT15-6	74	6	2.782	2.752	-	1-1/4	0.312	1.000	1-7/64	47/64	0.50
3MR-80A-15	80-5MGT15-6	80	6	3.008	2.978	-	1-1/4	0.312	1.000	1-7/64	47/64	0.16
3MR-90A-15	90-5MGT15-6	90	6	3.384	3.354	-	1-1/4	0.312	1.000	1-7/64	47/64	0.60
3MR-100A-15	100-5MGT15-6	100	6	3.760	3.730	-	1-1/4	0.312	1.000	1-7/64	47/64	0.73
3MR-120A-15	120-5MGT15-6	120	6	4.511	4.481	-	1-1/4	0.312	1.000	1-7/64	47/64	0.85

Note : Pulleys with 12 and 13 grooves have 1 set screw; others have 2 at 90°.