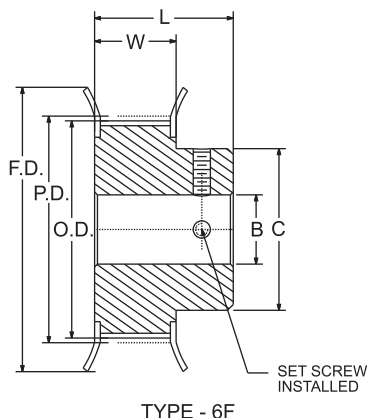
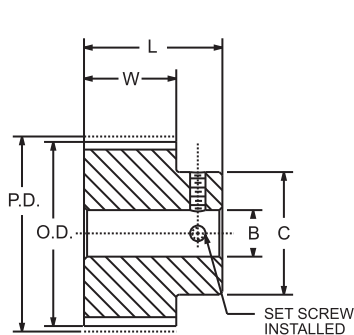


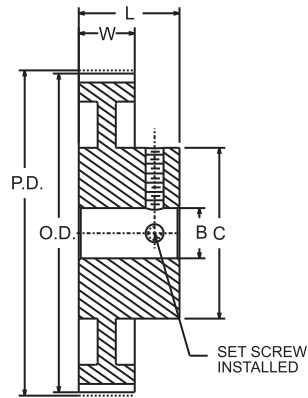
GT2® TIMING BELT PULLEY 5MM PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 9MM WIDE BELT

TYPE - 6F

5MM PITCH (GT2®) 9MM WIDE BELTS													
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/ GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
5MR-12S-09	12-5MGT-09-6FA	12	6F	0.752	0.707	7/8	7/16	0.250	0.250	51/64	35/64	1/4	0.02
5MR-13S-09	13-5MGT-09-6FA	13	6F	0.815	0.770	15/16	5/8	0.250	0.250	51/64	35/64	1/4	0.03
5MR-14S-09	14-5MGT-09-6FA	14	6F	0.877	0.832	1	5/8	0.250	0.250	51/64	35/64	1/4	0.03
5MR-15S-09	15-5MGT-09-6FA	15	6F	0.940	0.895	1-1/16	5/8	0.250	0.250	51/64	35/64	1/4	0.04
5MR-16S-09	16-5MGT-09-6FA	16	6F	1.003	0.958	1-3/32	5/8	0.250	0.250	51/64	35/64	1/4	0.04
5MR-17S-09	17-5MGT-09-6FA	17	6F	1.065	1.020	1-3/16	5/8	0.250	0.250	51/64	35/64	3/8	0.04
5MR-18S-09	18-5MGT-09-6FA	18	6F	1.128	1.083	1-1/4	11/16	0.250	0.250	51/64	35/64	3/8	0.06
5MR-19S-09	19-5MGT-09-6FA	19	6F	1.191	1.146	1-5/16	3/4	0.250	0.250	51/64	35/64	3/8	0.06
5MR-20S-09	20-5MGT-09-6FA	20	6F	1.253	1.208	1-3/8	13/16	0.250	0.250	51/64	35/64	3/8	0.06
5MR-22S-09	22-5MGT-09-6FA	22	6F	1.379	1.334	1-1/2	15/16	0.250	0.250	51/64	35/64	1/2	0.08
5MR-24S-09	24-5MGT-09-6FA	24	6F	1.504	1.459	1-5/8	1-1/8	0.375	0.375	59/64	35/64	1/2	0.11
5MR-25S-09	25-5MGT-09-6FA	25	6F	1.566	1.521	1-11/16	1-1/8	0.375	0.375	59/64	35/64	1/2	0.12
5MR-26S-09	26-5MGT-09-6FA	26	6F	1.629	1.584	1-3/4	1-1/8	0.375	0.375	59/64	35/64	1/2	0.13
5MR-28S-09	28-5MGT-09-6FA	28	6F	1.754	1.709	1-7/8	1-1/2	0.500	0.500	1-1/8	35/64	1/2	0.15
5MR-30S-09	30-5MGT-09-6FA	30	6F	1.880	1.835	2	1-1/2	0.500	0.500	1-1/8	35/64	1/2	0.17
5MR-32S-09	32-5MGT-09-6FA	32	6F	2.005	1.960	2-1/8	1-1/2	0.500	0.500	1-1/8	35/64	1/2	0.19
5MR-34S-09	34-5MGT-09-6FA	34	6F	2.130	2.085	2-1/4	1-1/2	0.500	0.500	1-1/2	35/64	1/2	0.22

Note : Pulleys with 12 and 13 grooves have 1 set screw; others have 2 at 90°.

GT2® TIMING BELT PULLEY 5MM PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 9MM WIDE BELT


TYPE - 6

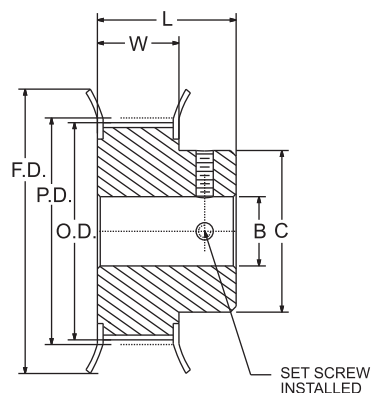


TYPE - 6W



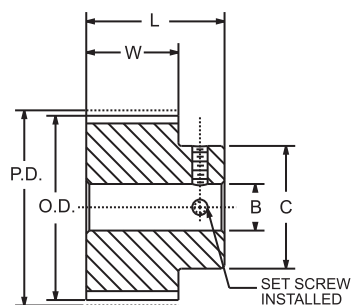
5MM PITCH (GT2®) 9MM WIDE BELTS												
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/GROOVES	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
				P.D.	O.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
5MR-12S-09	12-5MGT-09-6A	12	6	0.752	0.707	7/16	0.250	0.250	1-1/30	35/64	1/4	0.02
5MR-13S-09	13-5MGT-09-6A	13	6	0.815	0.770	5/8	0.250	0.250	1-1/30	35/64	1/4	0.02
5MR-14S-09	14-5MGT-09-6A	14	6	0.877	0.832	5/8	0.250	0.250	1-1/30	35/64	1/4	0.03
5MR-15S-09	15-5MGT-09-6A	15	6	0.940	0.895	5/8	0.250	0.250	1-1/30	35/64	1/4	0.03
5MR-16S-09	16-5MGT-09-6A	16	6	1.003	0.958	5/8	0.250	0.250	1-1/30	35/64	1/4	0.04
5MR-17S-09	17-5MGT-09-6A	17	6	1.065	1.020	5/8	0.250	0.250	1-1/30	35/64	3/8	0.04
5MR-18S-09	18-5MGT-09-6A	18	6	1.128	1.083	11/16	0.250	0.250	1-1/30	35/64	3/8	0.05
5MR-19S-09	19-5MGT-09-6A	19	6	1.191	1.146	3/4	0.250	0.250	1-1/30	35/64	3/8	0.05
5MR-20S-09	20-5MGT-09-6A	20	6	1.253	1.208	13/16	0.250	0.250	1-1/30	35/64	3/8	0.06
5MR-22S-09	22-5MGT-09-6A	22	6	1.379	1.334	15/16	0.250	0.250	1-1/30	35/64	1/2	0.08
5MR-24S-09	24-5MGT-09-6A	24	6	1.504	1.459	1-1/8	0.375	0.375	1-5/32	35/64	1/2	0.11
5MR-25S-09	25-5MGT-09-6A	25	6	1.566	1.521	1-1/8	0.375	0.375	1-5/32	35/64	1/2	0.11
5MR-26S-09	26-5MGT-09-6A	26	6	1.629	1.584	1-1/8	0.375	0.375	1-5/32	35/64	1/2	0.12
5MR-28S-09	28-5MGT-09-6A	28	6	1.754	1.709	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.18
5MR-30S-09	30-5MGT-09-6A	30	6	1.880	1.835	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.19
5MR-32S-09	32-5MGT-09-6A	32	6	2.005	1.960	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.21
5MR-34S-09	34-5MGT-09-6A	34	6	2.130	2.085	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.23
5MR-36S-09	36-5MGT-09-6A	36	6	2.256	2.211	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.26
5MR-38S-09	38-5MGT-09-6A	38	6	2.381	2.336	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.28
5MR-40S-09	40-5MGT-09-6A	40	6	2.506	2.461	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.30
5MR-44S-09	44-5MGT-09-6WA	44	6W	2.757	2.712	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.31
5MR-48S-09	48-5MGT-09-6WA	48	6W	3.008	2.963	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.36
5MR-50S-09	50-5MGT-09-6WA	50	6W	3.133	3.088	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.38
5MR-56S-09	56-5MGT-09-6WA	56	6W	3.509	3.464	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.47
5MR-60S-09	60-5MGT-09-6WA	60	6W	3.760	3.715	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.53
5MR-62S-09	62-5MGT-09-6WA	62	6W	3.885	3.840	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.56
5MR-70S-09	70-5MGT-09-6WA	70	6W	4.386	4.341	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.70
5MR-72S-09	72-5MGT-09-6WA	72	6W	4.511	4.466	1-1/2	0.500	0.500	1-9/32	35/64	1/2	0.74

Note : Pulleys with 12 and 13 grooves have 1 set screw; others have 2 at 90°.

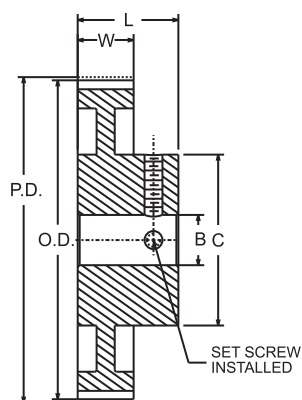
GT2® TIMING BELT PULLEY 5MM PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 15MM WIDE BELT

TYPE - 6F

5MM PITCH (GT2®) 15MM WIDE BELTS												
PART NUMBER	NO. OF TEETH/GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
12-5MGT-15-6FA	12	6F	0.752	0.707	7/8	7/16	0.250	0.250	1-1/32	25/32	1/4	0.03
13-5MGT-15-6FA	13	6F	0.815	0.770	15/16	5/8	0.250	0.250	1-1/32	25/32	1/4	0.03
14-5MGT-15-6FA	14	6F	0.877	0.832	1	5/8	0.250	0.250	1-1/32	25/32	1/4	0.04
15-5MGT-15-6FA	15	6F	0.940	0.895	1-1/16	5/8	0.250	0.250	1-1/32	25/32	1/4	0.04
16-5MGT-15-6FA	16	6F	1.003	0.958	1-3/32	5/8	0.250	0.250	1-1/32	25/32	1/4	0.05
17-5MGT-15-6FA	17	6F	1.065	1.020	1-3/16	5/8	0.250	0.250	1-1/32	25/32	1/4	0.06
18-5MGT-15-6FA	18	6F	1.128	1.083	1-1/4	11/16	0.250	0.250	1-1/32	25/32	1/4	0.07
19-5MGT-15-6FA	19	6F	1.191	1.146	1-5/16	3/4	0.250	0.250	1-1/32	25/32	1/4	0.08
20-5MGT-15-6FA	20	6F	1.253	1.208	1-3/8	13/16	0.250	0.250	1-1/32	25/32	1/4	0.10
22-5MGT-15-6FA	22	6F	1.379	1.334	1-1/2	15/16	0.250	0.250	1-1/32	25/32	1/4	0.11
24-5MGT-15-6FA	24	6F	1.504	1.459	1-5/8	1-1/8	0.375	0.375	1-5/32	25/32	3/8	0.13
25-5MGT-15-6FA	25	6F	1.566	1.521	1-11/16	1-1/8	0.375	0.375	1-5/32	25/32	3/8	0.14
26-5MGT-15-6FA	26	6F	1.629	1.584	1-3/4	1-1/8	0.375	0.375	1-5/32	25/32	3/8	0.16
28-5MGT-15-6FA	28	6F	1.754	1.709	1-7/8	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.21
30-5MGT-15-6FA	30	6F	1.880	1.835	2	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.22
32-5MGT-15-6FA	32	6F	2.005	1.960	2-1/8	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.25
34-5MGT-15-6FA	34	6F	2.130	2.085	2-1/4	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.29


Note : Pulleys with 12 and 13 grooves have 1 set screw; others have 2 at 90°.

GT2® TIMING BELT PULLEY 5MM PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 15MM WIDE BELT


TYPE - 6

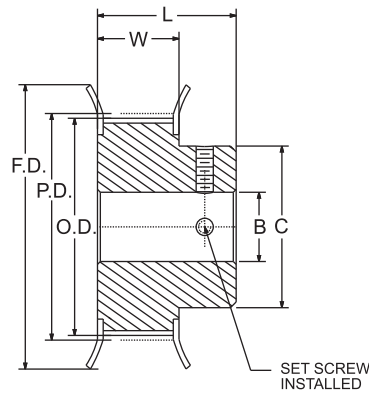


TYPE - 6W



5MM PITCH (GT2®) 15MM WIDE BELTS											
PART NUMBER	NO. OF TEETH/ GROOVES	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
			P.D.	O.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
12-5MGT-15-6A	12	6	0.752	0.707	7/16	0.250	0.250	1-3/32	25/32	1/4	0.02
13-5MGT-15-6A	13	6	0.815	0.770	5/8	0.250	0.250	1-3/32	25/32	1/4	0.03
14-5MGT-15-6A	14	6	0.877	0.832	5/8	0.250	0.250	1-3/32	25/32	1/4	0.04
15-5MGT-15-6A	15	6	0.940	0.895	5/8	0.250	0.250	1-3/32	25/32	1/4	0.04
16-5MGT-15-6A	16	6	1.003	0.958	5/8	0.250	0.250	1-3/32	25/32	1/4	0.05
17-5MGT-15-6A	17	6	1.065	1.020	5/8	0.250	0.250	1-3/32	25/32	3/8	0.06
18-5MGT-15-6A	18	6	1.128	1.083	11/16	0.250	0.250	1-3/32	25/32	3/8	0.06
19-5MGT-15-6A	19	6	1.191	1.146	3/4	0.250	0.250	1-3/32	25/32	3/8	0.07
20-5MGT-15-6A	20	6	1.253	1.208	7/16	0.250	0.250	1-3/32	25/32	3/8	0.08
22-5MGT-15-6A	22	6	1.379	1.334	13/16	0.250	0.250	1-3/32	25/32	1/2	0.09
24-5MGT-15-6A	24	6	1.504	1.459	15/16	0.375	0.375	1-5/32	25/32	1/2	0.15
25-5MGT-15-6A	25	6	1.566	1.521	1-1/8	0.375	0.375	1-5/32	25/32	1/2	0.21
26-5MGT-15-6A	26	6	1.629	1.584	1-1/8	0.375	0.375	1-5/32	25/32	1/2	0.23
28-5MGT-15-6A	28	6	1.754	1.709	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.25
30-5MGT-15-6A	30	6	1.880	1.835	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.25
32-5MGT-15-6A	32	6	2.005	1.960	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.27
34-5MGT-15-6A	34	6	2.130	2.085	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.30
36-5MGT-15-6A	36	6	2.256	2.211	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.33
38-5MGT-15-6A	38	6	2.381	2.336	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.37
40-5MGT-15-6A	40	6	2.506	2.461	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.40
44-5MGT-15-6WA	44	6W	2.757	2.712	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.39
48-5MGT-15-6WA	48	6W	3.008	2.963	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.45
50-5MGT-15-6WA	50	6W	3.133	3.088	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.49
56-5MGT-15-6WA	56	6W	3.509	3.464	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.60
60-5MGT-15-6WA	60	6W	3.760	3.715	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.68
62-5MGT-15-6WA	62	6W	3.885	3.840	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.72
70-5MGT-15-6WA	70	6W	4.386	4.341	1-1/2	0.500	0.500	1-9/32	25/32	1/2	0.91
72-5MGT-15-6WA	72	6W	4.511	4.466	1-1/2	0.500	0.500	1-9/32	25/32	1/2	1.11

Note : Pulleys with 12 and 13 grooves have 1 set screw; others have 2 at 90°.

GT2® TIMING BELT PULLEY 5MM PITCH
STEEL
FOR 15MM & 25MM WIDE BELT

TYPE - 6F

5MM PITCH (GT2®) 15MM WIDE BELTS												
PART NUMBER	NO. OF TEETH/GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
18-SMGT-15-6FS	18	6F	1.128	1.083	1-3/8	11/16	0.250	0.250	1-1/4	57/64	0.68	0.25
19-SMGT-15-6FS	19	6F	1.191	1.146	1-7/16	7/8	0.250	0.250	1-1/4	57/64	0.88	0.32
20-SMGT-15-6FS	20	6F	1.253	1.208	1-17/32	29/32	0.250	0.250	1-1/4	57/64	0.90	0.35
21-SMGT-15-6FS	21	6F	1.316	1.271	1-17/32	29/32	0.250	0.250	1-1/4	57/64	0.90	0.40
22-SMGT-15-6FS	22	6F	1.379	1.334	1-21/32	15/16	0.250	0.250	1-9/32	57/64	0.94	0.38
23-SMGT-15-6FS	23	6F	1.441	1.396	1-21/32	1-5/32	0.375	0.375	1-9/32	57/64	1.15	0.45
24-SMGT-15-6FS	24	6F	1.504	1.459	1-25/32	1-3/16	0.375	0.375	1-9/32	57/64	1.18	0.53
25-SMGT-15-6FS	25	6F	1.566	1.521	1-25/32	1-3/16	0.375	0.375	1-9/32	57/64	1.18	0.55
26-SMGT-15-6FS	26	6F	1.629	1.584	1-29/32	1-13/64	0.375	0.375	1-9/32	57/64	1.21	0.65
28-SMGT-15-6FS	28	6F	1.754	1.709	2-1/32	1-3/8	0.500	0.500	1-11/32	57/64	1.37	0.70
30-SMGT-15-6FS	30	6F	1.880	1.835	2-1/8	1-7/16	0.500	0.500	1-11/32	57/64	1.44	0.80
32-SMGT-15-6FS	32	6F	2.005	1.960	2-1/8	1-7/16	0.500	0.500	1-11/32	57/64	1.44	0.85
34-SMGT-15-6FS	34	6F	2.130	2.085	2-3/8	1-11/16	0.500	0.500	1-11/32	57/64	1.69	1.05
36-SMGT-15-6FS	36	6F	2.256	2.211	2-3/8	1-11/16	0.500	0.500	1-11/32	57/64	1.69	1.15
38-SMGT-15-6FS	38	6F	2.381	2.336	2-5/8	1-61/64	0.500	0.500	1-11/32	57/64	1.96	1.40
40-SMGT-15-6FS	40	6F	2.506	2.461	2-3/4	2-3/32	0.500	0.500	1-3/8	57/64	2.09	1.60
45-SMGT-15-6FS	45	6F	2.820	2.775	3-3/32	2-11/32	0.500	0.500	1-3/8	57/64	2.34	2.05
50-SMGT-15-6FS	50	6F	3.133	3.088	3-21/64	2-1/2	0.500	0.500	1-3/8	57/64	2.50	2.25

5 PITCH (GT2®) 25MM WIDE BELTS												
PART NUMBER	NO. OF TEETH/GROOVES	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ. "D"	WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"		
18-SMGT-25-6FS	18	6F	1.128	1.083	1-3/8	11/16	0.250	0.250	1-21/32	1-9/32	0.68	0.30
19-SMGT-25-6FS	19	6F	1.191	1.146	1-7/16	7/8	0.250	0.250	1-21/32	1-9/32	0.88	0.40
20-SMGT-25-6FS	20	6F	1.253	1.208	1-17/32	29/32	0.250	0.250	1-21/32	1-9/32	0.90	0.48
21-SMGT-25-6FS	21	6F	1.316	1.271	1-17/32	29/32	0.250	0.250	1-21/32	1-9/32	0.90	0.50
22-SMGT-25-6FS	22	6F	1.379	1.334	1-21/32	15/16	0.250	0.250	1-11/16	1-9/32	0.94	0.55
23-SMGT-25-6FS	23	6F	1.441	1.396	1-21/32	1-5/32	0.375	0.375	1-11/16	1-9/32	1.15	0.60
24-SMGT-25-6FS	24	6F	1.504	1.459	1-25/32	1-3/16	0.375	0.375	1-11/16	1-9/32	1.18	0.65
25-SMGT-25-6FS	25	6F	1.566	1.521	1-25/32	1-3/16	0.375	0.375	1-11/16	1-9/32	1.18	0.70
26-SMGT-25-6FS	26	6F	1.629	1.584	1-29/32	1-13/64	0.375	0.375	1-11/16	1-9/32	1.21	0.80
28-SMGT-25-6FS	28	6F	1.754	1.709	2-1/32	1-3/8	0.500	0.500	1-47/64	1-9/32	1.37	0.90
30-SMGT-25-6FS	30	6F	1.880	1.835	2-1/8	1-7/16	0.500	0.500	1-47/64	1-9/32	1.44	1.05
32-SMGT-25-6FS	32	6F	2.005	1.960	2-1/8	1-7/16	0.500	0.500	1-47/64	1-9/32	1.44	1.15
34-SMGT-25-6FS	34	6F	2.130	2.085	2-3/8	1-11/16	0.500	0.500	1-47/64	1-9/32	1.69	1.40
36-SMGT-25-6FS	36	6F	2.256	2.211	2-3/8	1-11/16	0.500	0.500	1-47/64	1-9/32	1.69	1.50
38-SMGT-25-6FS	38	6F	2.381	2.336	2-5/8	1-61/64	0.500	0.500	1-47/64	1-9/32	1.96	1.80
40-SMGT-25-6FS	40	6F	2.506	2.461	2-3/4	2-3/32	0.500	0.500	1-25/32	1-9/32	2.09	2.10
45-SMGT-25-6FS	45	6F	2.820	2.775	3-3/32	2-11/32	0.500	0.500	1-25/32	1-9/32	2.34	2.65
50-SMGT-25-6FS	50	6F	3.133	3.088	3-21/64	2-1/2	0.500	0.500	1-25/32	1-9/32	2.50	3.25

Note : Pulleys with 12 and 13 grooves have 1 set screw; others have 2 at 90°.