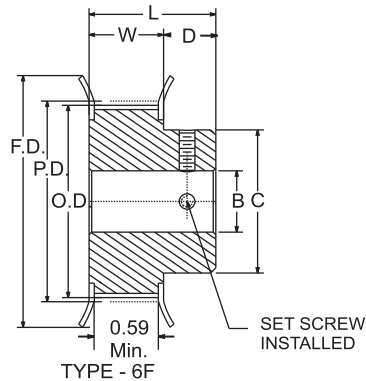


L TIMING BELT PULLEY – 3/8" PITCH
**ALUMINUM
CLEAR ANODIZED**
FOR 1/2, 3/4" & 1" WIDE BELTS


3/8" PITCH (L) 1/2" WIDE BELTS													
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/GROOVES	TYPE	DIAMETERS				STOCK BORES			DIMENSIONS		WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.		OVERALL LENGTH "L"	FACE WIDTH "W"	
10L050-6FA	10L050-6FA-3/8	10	6F	1.194	1.164	1-7/16	7/8	3/8	1/2	1/2	1-1/8	23/32	0.09
11L050-6FA	11L050-6FA-3/8	11	6F	1.313	1.283	1-17/32	1	3/8	1/2	5/8	1-1/8	23/32	0.11
12L050-6FA	12L050-6FA-3/8	12	6F	1.432	1.402	1-21/32	1-1/8	3/8	1/2	11/16	1-3/16	23/32	0.14
13L050-6FA	13L050-6FA-3/8	13	6F	1.552	1.522	1-25/32	1-1/8	3/8	1/2	11/16	1-3/16	23/32	0.16
14L050-6FA	14L050-6FA-3/8	14	6F	1.671	1.641	1-29/32	1-1/4	3/8	1/2	3/4	1-3/16	23/32	0.19
15L050-6FA	15L050-6FA-3/8	15	6F	1.790	1.760	2-1/32	1-3/8	3/8	1/2	13/16	1-1/4	23/32	0.23
16L050-6FA	16L050-6FA-1/2	16	6F	1.910	1.880	2-1/8	1-3/8	1/2	5/8	13/16	1-1/4	23/32	0.25
17L050-6FA	17L050-6FA-1/2	17	6F	2.029	1.999	2-1/4	1-1/2	1/2	5/8	15/16	1-1/4	23/32	0.29
18L050-6FA	18L050-6FA-1/2	18	6F	2.149	2.119	2-3/8	1-5/8	1/2	5/8	1	1-1/4	23/32	0.33
19L050-6FA	19L050-6FA-1/2	19	6F	2.268	2.238	2-1/2	1-11/16	1/2	5/8	1 1/16	1-5/16	23/32	0.38
20L050-6FA	20L050-6FA-1/2	20	6F	2.387	2.357	2-5/8	1-13/16	1/2	5/8	1 1/8	1-5/16	23/32	0.43
21L050-6FA	21L050-6FA-1/2	21	6F	2.507	2.477	2-3/4	2	1/2	5/8	1 1/4	1-3/8	3/4	0.52
22L050-6FA	22L050-6FA-1/2	22	6F	2.626	2.596	2-7/8	2-1/8	1/2	5/8	1 5/16	1-3/8	3/4	0.58
24L050-6FA	24L050-6FA-1/2	24	6F	2.865	2.835	3-3/32	2-1/4	1/2	5/8	1 3/8	1-3/8	3/4	0.68

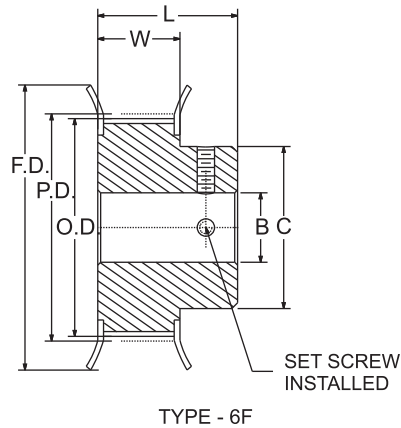
3/8" PITCH (L) 3/4" WIDE BELTS														
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/ GROOVES	TYPE	DIAMETERS				STOCK BORES				DIMENSIONS		WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.			MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"	
12L075-6FA	12L075-6FA-3/8	12	6F	1.432	1.402	1-11/16	1-1/8	3/8	1/2	5/8	11/16	1-1/2	1	0.50
13L075-6FA	13L075-6FA-3/8	13	6F	1.552	1.522	1-13/16	1-1/8	3/8	-	-	11/16	1-1/2	1	0.56
14L075-6FA	14L075-6FA-3/8	14	6F	1.671	1.641	1-15/16	1-1/8	3/8	-	-	11/16	1-1/2	1	0.69
15L075-6FA	15L075-6FA-3/8	15	6F	1.790	1.760	2-1/16	1-1/4	3/8	1/2	-	3/4	1-5/8	1	0.81
16L075-6FA	16L075-6FA-1/2	16	6F	1.910	1.880	2-3/16	1-3/8	1/2	5/8	-	13/16	1-5/8	1	1.00
17L075-6FA	17L075-6FA-1/2	17	6F	2.029	1.999	2-5/16	1-3/8	1/2	-	-	13/16	1-5/8	1	1.19
18L075-6FA	18L075-6FA-1/2	18	6F	2.149	2.119	2-7/16	1-1/2	1/2	-	-	15/16	1-5/8	1	1.31
19L075-6FA	19L075-6FA-1/2	19	6F	2.268	2.238	2-5/8	1-13/16	1/2	-	-	1 1/8	1-5/8	1	1.40
20L075-6FA	20L075-6FA-1/2	20	6F	2.387	2.357	2-5/8	1-13/16	1/2	-	-	1 1/8	1-5/8	1	1.50
21L075-6FA	21L075-6FA-1/2	21	6F	2.507	2.477	2-7/8	2	1/2	-	-	1 1/4	1-3/4	1	1.60
22L075-6FA	22L075-6FA-1/2	22	6F	2.626	2.596	2-7/8	2	1/2	5/8	-	1 1/4	1-3/4	1	1.80
24L075-6FA	24L075-6FA-1/2	24	6F	2.865	2.835	3-1/8	2-1/4	1/2	-	-	1 3/8	1-3/4	1	2.10

3/8" PITCH (L) 1" WIDE BELTS													
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH/GROOVES	TYPE	DIAMETERS				STOCK BORES			DIMENSIONS		WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.		OVERALL LENGTH "L"	FACE WIDTH "W"	
13L100-6FA	13L100-6FA-3/8	13	6F	1.552	1.522	1-13/16	1-1/8	3/8	5/8		1-3/4	1-1/4	0.69
14L100-6FA	14L100-6FA-3/8	14	6F	1.671	1.641	1-15/16	1-1/8	3/8	3/4		1-3/4	1-1/4	0.81
15L100-6FA	15L100-6FA-3/8	15	6F	1.790	1.760	2-1/16	1-1/4	3/8	3/4		1-7/8	1-1/4	1.13
16L100-6FA	16L100-6FA-1/2	16	6F	1.910	1.880	2-3/16	1-3/8	1/2	3/4		1-7/8	1-1/4	1.25
17L100-6FA	17L100-6FA-1/2	17	6F	2.029	1.999	2-5/16	1-3/8	1/2	7/8		1-7/8	1-1/4	1.44
18L100-6FA	18L100-6FA-1/2	18	6F	2.149	2.119	2-7/16	1-1/2	1/2	7/8		1-7/8	1-1/4	1.63
19L100-6FA	19L100-6FA-1/2	19	6F	2.268	2.238	2-5/8	1-13/16	1/2	7/8		1-7/8	1-1/4	1.80
20L100-6FA	20L100-6FA-1/2	20	6F	2.387	2.357	2-5/8	1-13/16	1/2	1		2	1-1/4	1.80
22L100-6FA	22L100-6FA-1/2	22	6F	2.626	2.596	2-7/8	2	1/2	1		2	1-1/4	2.31
24L100-6FA	24L100-6FA-1/2	24	6F	2.865	2.835	3-1/8	2-1/4	1/2	1		2	1-1/4	2.50

Note : All the pulleys are furnished with two set screw at 90°.

Part Number Mentioned is for Stock bore.

Rework can be done to accommodate maximum bore size.

L TIMING BELT PULLEY – 3/8" PITCH (FINISH BORE)
STEEL
FOR 1/2, 3/4" & 1" WIDE BELTS


3/8" PITCH (L) 1/2" WIDE BELTS															
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES					DIMENSIONS			WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB "C"	MIN.			MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"	HOB PROJ.		
10L050-6FS-FB-XX	10	6F	1.194	1.164	1-7/16	13/16	3/8	-	-	-	1/2	1-1/4	3/4	0.500	0.30
12L050-6FS-FB-XX	12	6F	1.432	1.402	1-11/16	1	3/8	1/2	-	-	3/4	1-1/4	3/4	0.500	0.30
13L050-6FS-FB-XX	13	6F	1.552	1.522	1-13/16	1-1/8	3/8	1/2	-	-	3/4	1-1/4	3/4	0.500	0.40
14L050-6FS-FB-XX	14	6F	1.671	1.641	1-15/16	1-1/8	3/8	1/2	-	-	3/4	1-1/4	3/4	0.500	0.50
15L050-6FS-FB-XX	15	6F	1.790	1.760	2-1/16	1-11/32	1/2	-	5/8	3/4	7/8	1-1/4	3/4	0.500	0.60
16L050-6FS-FB-XX	16	6F	1.910	1.880	2-3/16	1-7/16	1/2	-	5/8	3/4	1	1-1/4	3/4	0.500	0.80
17L050-6FS-FB-XX	17	6F	2.029	1.999	2-5/16	1-7/16	3/8	1/2	5/8	3/4	1	1-1/4	3/4	0.500	0.80

3/8" PITCH (L) 3/4" WIDE BELTS														
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES				DIMENSIONS			WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB "C"	MIN.			MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"	HOB PROJ.	
12L075-6FS-FB-XX	12	6F	1.432	1.402	1-11/16	1	3/8	1/2	-	3/4	1-1/2	1/2	0.500	0.30
13L075-6FS-FB-XX	13	6F	1.552	1.522	1-13/16	1-1/8	3/8	1/2	-	3/4	1-1/2	1/2	0.500	0.40
14L075-6FS-FB-XX	14	6F	1.671	1.641	1-15/16	1-1/8	3/8	1/2	-	3/4	1-1/2	1/2	0.500	0.50
15L075-6FS-FB-XX	15	6F	1.790	1.760	2-1/16	1-11/32	1/2	5/8	3/4	7/8	1-1/2	51/64	0.500	0.60
16L075-6FS-FB-XX	16	6F	1.910	1.880	2-3/16	1-7/16	1/2	5/8	3/4	1	1-1/2	51/64	0.500	0.80
17L075-6FS-FB-XX	17	6F	2.029	1.999	2-5/16	1-7/16	1/2	5/8	3/4	1	1-1/2	51/64	0.500	0.80

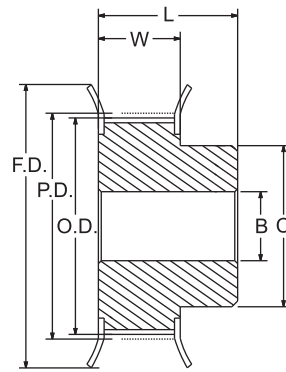
3/8" PITCH (L) 1" WIDE BELTS														
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES				DIMENSIONS			WEIGHT (lbs)
			P.D.	O.D.	F.D.	HUB "C"	MIN.			MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"	HOB PROJ.	
13L100-6FS5-FB-XX	13	6F	1.552	1.522	1-13/16	1-1/8	3/8	1/2	-	3/4	1-3/4	1	0.500	0.70
14L100-6FS5-FB-XX	14	6F	1.671	1.641	1-15-16	1-1/8	3/8	1/2	-	3/4	1-3/4	1	0.500	0.80
15L100-6FS6-FB-XX	15	6F	1.790	1.760	2-1/16	1-11/32	1/2	5/8	3/4	7/8	1-3/4	1	0.500	1.00
16L100-6FS6-FB-XX	16	6F	1.910	1.880	2-3/16	1-7/16	1/2	5/8	3/4	1	1-3/4	1	0.500	1.00
17L100-6FS6-FB-XX	17	6F	2.029	1.999	2-5/16	1-5/16	1/2	5/8	3/4	1	1-3/4	1	0.500	1.20

Note : Finished Bore Pulleys with 3/8" and 1/2" Bore are furnished with Hollow Head Setscrews and No Keyway.

Stock Pulleys with 5/8" and 3/4" Bore are furnished with 3/16" x 3/32" Keyseat and Hollow Head Setscrew over Keyseat.

Please Specify bore size after FB in XX when ordering parts from us.

Rework services are available to accommodate Max Bore Size.

L TIMING BELT PULLEY – 3/8" PITCH (PLAIN BORE)
STEEL
FOR 1/2" 3/4" & 1" WIDE BELTS

TYPE - 6F


3/8" PITCH (L) 1/2" WIDE BELTS												
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		WEIGHT (lbs)
				P.D.	O.D.	F.D.	HUB "C"	MIN.	MAX.	OVERALL LENGTH "L"	FACE WIDTH "W"	
18L050-6FS6	18L050-6FS-PB-1/2	18	6F	2.149	2.119	2-7/16	1-9/16	1/2	7/8	1-1/4	3/4	0.80
19L050-6FS6	19L050-6FS-PB-1/2	19	6F	2.268	2.238	2-5/8	1-11/16	1/2	7/8	1-1/4	3/4	0.90
20L050-6FS6	20L050-6FS-PB-1/2	20	6F	2.387	2.357	2-5/8	1-11/16	1/2	7/8	1-1/4	3/4	1.00
21L050-6FS6	21L050-6FS-PB-1/2	21	6F	2.507	2.477	2-7/8	2	1/2	1 1/4	1-1/4	3/4	1.30
22L050-6FS6	22L050-6FS-PB-1/2	22	6F	2.626	2.596	2-7/8	2	1/2	1 1/4	1-1/4	3/4	1.40
24L050-6FS6	24L050-6FS-PB-1/2	24	6F	2.865	2.835	3-1/8	2-1/4	1/2	1 3/8	1-1/4	3/4	1.80
26L050-6FS6	26L050-6FS-PB-1/2	26	6F	3.104	3.074	3-3/8	2-1/4	1/2	1 3/8	1-1/4	3/4	2.10
28L050-6FS6	28L050-6FS-PB-1/2	28	6F	3.342	3.312	3-5/8	2-1/4	1/2	1 3/8	1-1/4	3/4	2.30
30L050-6FS6	30L050-6FS-PB-1/2	30	6F	3.581	3.551	3-13/16	2-1/4	1/2	1 3/8	1-1/4	3/4	2.40
32L050-6FS6	32L050-6FS-PB-1/2	32	6F	3.820	3.790	4-1/16	2-5/8	1/2	1 5/8	1-1/4	3/4	3.00
36L050-6FS6	36L050-6FS-PB-1/2	36	6F	4.297	4.267	4-11/16	3-1/2	1/2	2 5/16	1-1/4	3/4	3.80
40L050-6FS6	40L050-6FS-PB-1/2	40	6F	4.775	4.745	5	3-5/8	1/2	2 3/8	1-1/4	3/4	4.60




3/8" PITCH (L) 3/4" WIDE BELTS												
18L075-6FS7	18L075-6FS-PB-5/8	18	6F	2.149	2.119	2-7/16	1-9/16	5/8	7/8	1-1/2	1	1.00
19L075-6FS7	19L075-6FS-PB-5/8	19	6F	2.268	2.238	2-5/8	1-11/16	5/8	7/8	1-1/2	1	1.30
20L075-6FS7	20L075-6FS-PB-5/8	20	6F	2.387	2.357	2-5/8	1-11/16	5/8	7/8	1-1/2	1	1.30
21L075-6FS7	21L075-6FS-PB-5/8	21	6F	2.507	2.477	2-7/8	2	5/8	1 1/4	1-1/2	1	1.60
22L075-6FS7	22L075-6FS-PB-5/8	22	6F	2.626	2.596	2-7/8	2	5/8	1 1/4	1-1/2	1	1.80
24L075-6FS7	24L075-6FS-PB-5/8	24	6F	2.865	2.835	3-1/8	2-1/4	5/8	1 3/8	1-1/2	1	2.10
26L075-6FS7	26L075-6FS-PB-5/8	26	6F	3.104	3.074	3-3/8	2-1/4	5/8	1 3/8	1-1/2	1	2.40
28L075-6FS7	28L075-6FS-PB-5/8	28	6F	3.342	3.312	3-5/8	2-1/4	5/8	1 3/8	1-1/2	1	2.90
30L075-6FS7	30L075-6FS-PB-5/8	30	6F	3.581	3.551	3-13/16	2-1/4	5/8	1 3/8	1-1/2	1	3.00
32L075-6FS7	32L075-6FS-PB-5/8	32	6F	3.820	3.790	4-1/16	2-5/8	5/8	1 5/8	1-1/2	1	3.60
36L075-6FS7	36L075-6FS-PB-5/8	36	6F	4.297	4.267	4-11/16	3-1/2	5/8	2 5/16	1-1/2	1	4.40
40L075-6FS7	40L075-6FS-PB-5/8	40	6F	4.775	4.745	5	3-5/8	5/8	2 3/8	1-1/2	1	5.00

3/8" PITCH (L) 1" WIDE BELTS												
18L100-6FS7	18L100-6FS-PB-5/8	18	6F	2.149	2.119	2-7/16	1-9/16	5/8	7/8	1-3/4	1-1/4	1.2
19L100-6FS7	19L100-6FS-PB-5/8	19	6F	2.268	2.238	2-5/8	1-11/16	5/8	7/8	1-3/4	1-1/4	1.4
20L100-6FS7	20L100-6FS-PB-5/8	20	6F	2.387	2.357	2-5/8	1-11/16	5/8	7/8	1-3/4	1-1/4	1.8
21L100-6FS7	21L100-6FS-PB-5/8	21	6F	2.507	2.477	2-7/8	2	5/8	1 1/4	1-3/4	1-1/4	2.0
22L100-6FS7	22L100-6FS-PB-5/8	22	6F	2.626	2.596	2-7/8	2	5/8	1 1/4	1-3/4	1-1/4	2.1
24L100-6FS7	24L100-6FS-PB-5/8	24	6F	2.865	2.835	3-1/8	2-1/4	5/8	1 3/8	1-3/4	1-1/4	2.5
26L100-6FS7	26L100-6FS-PB-5/8	26	6F	3.104	3.074	3-3/8	2-1/4	5/8	1 5/8	1-3/4	1-1/4	3.0
28L100-6FS7	28L100-6FS-PB-5/8	28	6F	3.342	3.312	3-5/8	2-1/4	5/8	1 3/4	1-3/4	1-1/4	3.6
30L100-6FS7	30L100-6FS-PB-5/8	30	6F	3.581	3.551	3-13/16	2-1/4	5/8	1 7/8	1-3/4	1-1/4	4.1
32L100-6FS7	32L100-6FS-PB-5/8	32	6F	3.820	3.790	4-1/16	2-5/8	5/8	2	1-3/4	1-1/4	4.8
36L100-6FS7	36L100-6FS-PB-5/8	36	6F	4.297	4.267	4-11/16	3-1/2	5/8	2 5/16	1-3/4	1-1/4	5.4
40L100-6FS7	40L100-6FS-PB-5/8	40	6F	4.775	4.745	5	3-5/8	5/8	2 5/16	1-3/4	1-1/4	6.0

Note : Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size

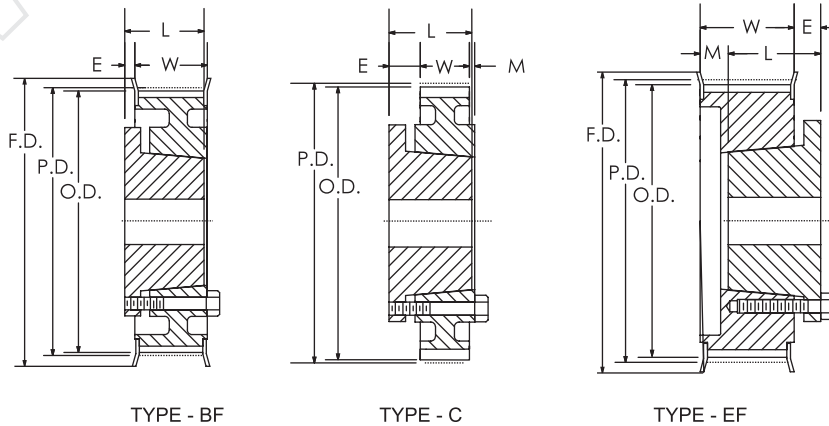
Drill & Tap Set Screw holes as per request.

L TIMING BELT PULLEY – 3/8" PITCH (TAPER LOCK (TL®) BUSH)
STEEL
FOR 1/2" 3/4" & 1" WIDE BELTS

TYPE - 3F

TYPE - 8F

TYPE - 7


3/8" PITCH (L) 1/2" WIDE BELTS															
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS				WEIGHT (lbs)
					P.D.	O.D.	F.D.	HUB.	MIN.	MAX.	Overall Length	FACE WIDTH "W"	E	M	
TL18L050	18L050TL-1108	18	1108	8F	2.149	2.119	2-25/64	1-5/8	1/2	1 1/8	3/4	7/8	0.13	0.00	0.45
TL20L050	20L050TL-1108	20	1108	8F	2.387	2.357	2-5/8	1-13/16	1/2	1 1/8	3/4	7/8	0.13	0.00	0.68
TL22L050	22L050TL-1108	22	1108	8F	2.626	2.596	2-7/8	2-1/16	1/2	1 1/8	3/4	7/8	0.13	0.00	0.90
TL24L050	24L050TL-1210	24	1210	8F	2.865	2.835	3-7/64	2-1/4	1/2	1 1/4	3/4	1	0.25	0.00	1.00
TL26L050	26L050TL-1210	26	1210	8F	3.104	3.074	3-11/32	2-1/2	1/2	1 1/4	3/4	1	0.25	0.00	1.20
TL28L050	28L050TL-1210	28	1610	8F	3.342	3.312	3-37/64	2-3/4	1/2	1 1/4	3/4	1	0.25	0.00	1.40
TL30L050	30L050TL-1610	30	1610	8F	3.581	3.551	3-53/64	2-7/8	1/2	1 11/16	3/4	1	0.25	0.00	1.50
TL32L050	32L050TL-1610	32	1610	8F	3.820	3.790	4-1/16	3-1/16	1/2	1 11/16	3/4	1	0.25	0.00	1.90
TL40L050	40L050TL-2012	40	2012	8F	4.775	4.745	5	3-1/2	1/2	2 1/8	3/4	1-1/4	0.25	0.25	2.40
TL48L050	48L050TL-2012	48	2012	8F	5.730	5.700	6	3-15/16	1/2	2 1/8	3/4	1-1/4	0.25	0.25	3.20
TL60L050	60L050TL-2012	60	2012	7	7.162	7.132	-	4-3/8	1/2	2 1/8	3/4	1-1/4	0.25	0.25	4.90
TL72L050	72L050TL-2012	72	2012	7	8.594	8.564	-	4-3/8	1/2	2 1/8	3/4	1-1/4	0.25	0.25	6.50
TL84L050	84L050TL-2517	84	2517	7	10.027	9.997	-	4-3/8	1/2	2 11/16	3/4	1-1/2	0.25	0.50	7.80

3/8" PITCH (L) 3/4" WIDE BELTS															
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS				WEIGHT (lbs)
					P.D.	O.D.	F.D.	HUB.	MIN.	MAX.	Overall Length	FACE WIDTH "W"	E	M	
TL18L075	18L075TL-1108	18	1108	3F	2.149	2.119	2-25/64	-	1/2	1 1/8	7/8	1	0.06	0.06	0.45
TL20L075	20L075TL-1108	20	1108	3F	2.387	2.357	2-5/8	-	1/2	1 1/8	7/8	1	0.06	0.06	0.68
TL22L075	22L075TL-1108	22	1108	3F	2.626	2.596	2-7/8	-	1/2	1 1/8	7/8	1	0.06	0.06	0.90
TL24L075	24L075TL-1210	24	1210	3F	2.865	2.835	3-7/64	-	1/2	1 1/4	1	1	0.00	-	1.00
TL26L075	26L075TL-1210	26	1210	3F	3.104	3.074	3-11/32	-	1/2	1 1/4	1	1	0.00	-	1.20
TL28L075	28L075TL-1610	28	1610	3F	3.342	3.312	3-37/64	-	1/2	1 11/16	1	1	0.00	-	1.20
TL30L075	30L075TL-1610	30	1610	3F	3.581	3.551	3-53/64	-	1/2	1 11/16	1	1	0.00	-	1.50
TL32L075	32L075TL-1610	32	1610	3F	3.820	3.790	4-1/16	-	1/2	1 11/16	1	1	0.00	-	1.90
TL40L075	40L075TL-2012	40	2012	8F	4.775	4.745	5	3-15/16	1/2	2 1/8	1	1	0.25	0.00	2.40
TL48L075	48L075TL-2012	48	2012	8F	5.730	5.700	6	3-15/16	1/2	2 1/8	1	1	0.25	0.00	3.20
TL60L075	60L075TL-2012	60	2012	7	7.162	7.132	-	4-3/8	1/2	2 1/8	1	1-17/64	0.13	0.13	4.90
TL74L075	72L075TL-2012	72	2012	7	8.594	8.564	-	4-3/8	1/2	2 1/8	1	1-17/64	0.13	0.13	6.50
TL84L075	84L075TL-2517	84	2517	7	10.027	9.997	-	4-11/16	1/2	2 11/16	1	1-3/4	0.25	0.50	7.80

3/8" PITCH (L) 1" WIDE BELTS															
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS				WEIGHT (lbs)
					P.D.	O.D.	F.D.	HUB.	MIN.	MAX.	Overall Length	FACE WIDTH "W"	E	M	
TL18L100	18L100TL-1108	18	1108	3F	2.149	2.119	2-25/38	-	1/2	1 1/8	7/8	1-1/4	0.06	0.31	0.70
TL20L100	20L100TL-1108	20	1108	3F	2.387	2.357	2-5/8	-	1/2	1 1/8	7/8	1-1/4	0.06	0.31	1.00
TL22L100	22L100TL-1108	22	1108	3F	2.626	2.596	2-7/8	-	1/2	1 1/8	7/8	1-1/4	0.06	0.31	1.30
TL24L100	24L100TL-1210	24	1210	3F	2.865	2.835	3-7/64	-	1/2	1 1/4	1	1-1/4	0.06	0.19	1.30
TL26L100	26L100TL-1210	26	1210	3F	3.104	3.074	3-11/32	-	1/2	1 1/4	1	1-1/4	0.06	0.19	1.70
TL28L100	28L100TL-1210	28	1210	3F	3.342	3.312	3-37/64	-	1/2	1 11/16	1	1-1/4	0.11	0.15	1.70
TL30L100	30L100TL-1610	30	1610	3F	3.581	3.551	3-53/64	-	1/2	1 11/16	1	1-1/4	0.11	0.15	2.20
TL32L100	32L100TL-1610	32	1610	3F	3.820	3.790	4-1/16	-	1/2	1 11/16	1	1-1/4	0.25	0.00	2.70
TL40L100	40L100TL-2012	40	2012	8F	4.775	4.745	5	-	1/2	2 1/8	1-1/4	1-1/4	0.00	-	3.60
TL48L100	48L100TL-2012	48	2012	8F	5.730	5.700	6	-	1/2	2 1/8	1-1/4	1-1/4	0.00	-	5.10
TL60L100	60L100TL-2012	60	2012	7	7.162	7.132	-	4-3/8	1/2	2 1/8	1-1/4	1-1/4	0.00	-	6.00
TL72L100	72L100TL-2012	72	2012	7	8.594	8.564	-	4-3/8	1/2	2 1/8	1-1/4	1-1/4	0.00	-	8.00
TL84L100	84L100TL-2517	84	2517	7	10.027	9.997	-	4-11/16	1/2	2 11/16	1-1/4	1-3/4	0.55	-	9.20

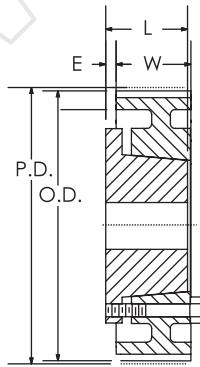
L TIMING BELT PULLEY – 3/8" PITCH QUICK DETACHABLE (PQD) STEEL BUSH
STEEL
FOR 1/2" & 3/4" WIDE BELTS


3/8" PITCH (L) 1/2" WIDE BELTS														
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS				WEIGHT (lbs)
					P.D.	O.D.	F.D.	MIN.	MAX.	FACE WIDTH "W"	E	L	M	
QD18L050	18L050QD-JA	18	JA	E1F	2.149	2.119	2-7/16	1/2	1 1/4	3/4	0.500	1.000	0.000	0.50
QD20L050	20L050QD-JA	20	JA	E1F	2.387	2.357	2-5/8	1/2	1 1/4	3/4	0.500	1.000	0.000	0.70
QD22L050	22L050QD-JA	22	JA	E1F	2.626	2.596	2-7/8	1/2	1 1/4	3/4	0.500	1.000	0.000	0.90
QD24L050	24L050QD-JA	24	JA	E1F	2.865	2.835	3-5/16	1/2	1 5/8	3/4	0.656	1.313	0.000	1.00
QD26L050	26L050QD-SH	26	SH	B1F	3.104	3.074	3-3/8	1/2	1 5/8	3/4	0.656	1.313	-	1.20
QD28L050	28L050QD-SH	28	SH	B1F	3.342	3.312	3-5/8	1/2	1 5/8	3/4	0.656	1.313	-	1.30
QD30L050	30L050QD-SDS	30	SDS	B1F	3.581	3.551	3-13/16	1/2	2	3/4	0.656	1.313	-	1.50
QD32L050	32L050QD-SDS	32	SDS	B1F	3.820	3.790	4-1/16	1/2	2	3/4	0.656	1.313	-	1.90
QD36L050	36L050QD-SDS	36	SDS	B1F	4.297	4.267	4-17/32	1/2	2	3/4	0.656	1.313	-	2.30
QD40L050	40L050QD-SDS	40	SDS	B1F	4.775	4.745	5	1/2	2	3/4	0.656	1.313	-	2.60
QD44L050	44L050QD-SDS	44	SDS	B1F	5.252	5.222	5-31/64	1/2	2	3/4	0.656	1.313	-	3.00
QD48L050	48L050QD-SDS	48	SDS	B1F	5.730	5.700	6	1/2	2	3/4	0.656	1.313	-	3.40
QD60L050	60L050QD-SD	60	SD	C2	7.162	7.132	-	1/2	2	3/4	0.906	1.813	0.250	5.10
QD72L050	72L050QD-SD	72	SD	C3	8.594	8.564	-	1/2	2	3/4	0.906	1.813	0.250	6.50
QD84L050	84L050QD-SD	84	SD	C3	10.027	9.997	-	1/2	2	3/4	0.906	1.813	0.250	7.80

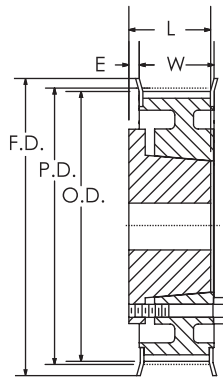
Note : Numerals in Type Designations mean: 1 = Solid, 2 = Web and 3 = Arm Construction; F = Flanged Pulley.

3/8" PITCH (L) 3/4" WIDE BELTS														
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS				WEIGHT (lbs)
					P.D.	O.D.	F.D.	MIN.	MAX.	FACE WIDTH "W"	E	L	M	
QD18L075	18L075QD-JA	18	JA	E1F	2.149	2.119	2-7/16	1/2	1 1/4	1	0.500	1.000	0.375	0.60
QD20L075	20L075QD-JA	20	JA	E1F	2.387	2.357	2-5/8	1/2	1 1/4	1	0.500	1.000	0.375	0.80
QD22L075	22L075QD-JA	22	JA	E1F	2.626	2.596	2-7/8	1/2	1 1/4	1	0.500	1.000	0.375	1.00
QD24L075	24L075QD-SH	24	SH	E1F	2.865	2.835	3-5/16	1/2	1 5/8	1	0.656	1.313	0.313	1.20
QD26L075	26L075QD-SH	26	SH	E1F	3.104	3.074	3-3/8	1/2	1 5/8	1	0.656	1.313	0.313	1.40
QD28L075	28L075QD-SH	28	SH	E1F	3.342	3.312	3-5/8	1/2	1 5/8	1	0.656	1.313	0.313	1.60
QD30L075	30L075QD-SDS	30	SDS	E1F	3.581	3.551	3-13/16	1/2	2	1	0.656	1.313	0.313	1.80
QD32L075	32L075QD-SDS	32	SDS	E1F	3.820	3.790	4-1/16	1/2	2	1	0.406	1.313	0.313	2.30
QD36L075	36L075QD-SDS	36	SDS	B1F	4.297	4.267	4-17/32	1/2	2	1	0.406	1.313	-	2.80
QD40L075	40L075QD-SDS	40	SDS	B1F	4.775	4.745	5	1/2	2	1	0.406	1.313	-	3.20
QD44L075	44L075QD-SDS	44	SDS	B1F	5.252	5.222	5-31/64	1/2	2	1	0.406	1.313	-	3.70
QD48L075	48L075QD-SDS	48	SDS	B1F	5.730	5.700	6	1/2	2	1	0.406	1.313	-	4.30
QD60L075	60L075QD-SD	60	SD	C2	7.162	7.132	-	1/2	2	1	0.781	1.813	0.125	5.70
QD72L075	72L075QD-SD	72	SD	C3	8.594	8.564	-	1/2	2	1	0.781	1.813	0.125	7.30
QD84L075	84L075QD-SD	84	SD	C3	10.027	9.997	-	1/2	2	1	0.781	1.813	0.125	8.50

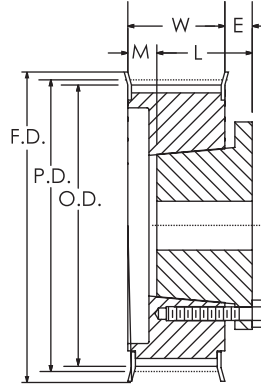
Note : Numerals in Type Designations mean: 1 = Solid, 2 = Web and 3 = Arm Construction; F = Flanged Pulley.

L TIMING BELT PULLEY - 3/8" PITCH QUICK DETACHABLE (PQD) STEEL BUSH
STEEL
FOR 1" WIDE BELTS


TYPE - B



TYPE - BF

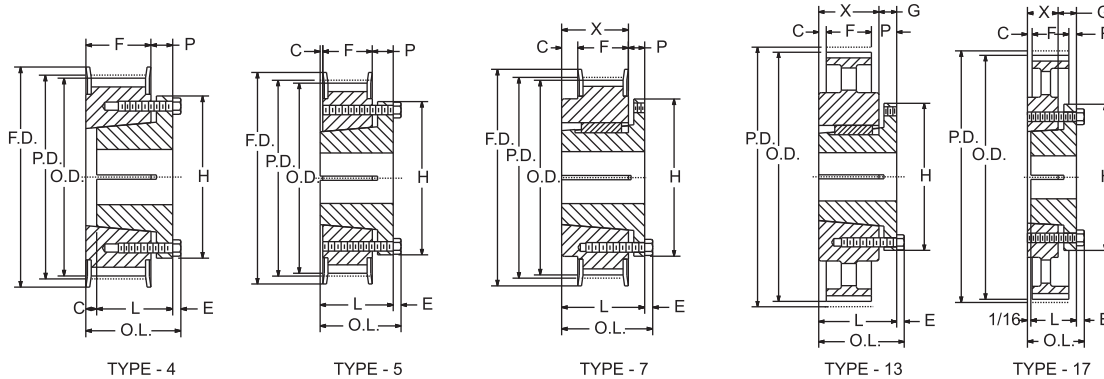


TYPE - EF

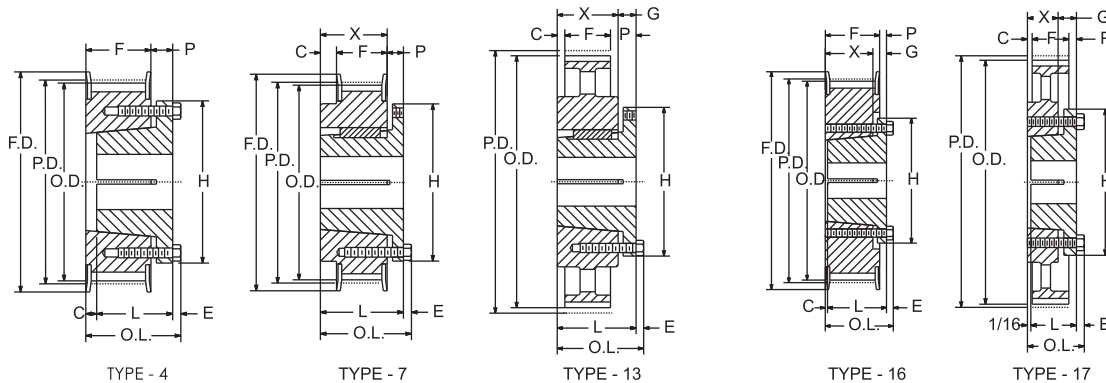


3/8" PITCH (L) 1" WIDE BELTS														
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS				WEIGHT (lbs.)
					P.D.	O.D.	F.D.	MIN.	MAX.	FACE WIDTH "W"	E	L	M	
QD18L100	18L100QD-JA	18	JA	E1F	2.149	2.119	2-7/16	1/2	1-1/4	1-1/4	0.500	1.000	0.625	0.70
QD20L100	20L100QD-JA	20	JA	E1F	2.387	2.357	2-5/8	1/2	1-1/4	1-1/4	0.500	1.000	0.625	1.00
QD22L100	22L100QD-JA	22	JA	E1F	2.626	2.596	2-7/8	1/2	1-1/4	1-1/4	0.500	1.000	0.625	1.30
QD24L100	24L100QD-SH	24	SH	E1F	2.865	2.835	3-5/16	1/2	1-5/8	1-1/4	0.656	1.313	0.500	1.40
QD26L100	26L100QD-SH	26	SH	E1F	3.104	3.074	3-3/8	1/2	1-5/8	1-1/4	0.656	1.313	0.500	1.70
QD28L100	28L100QD-SH	28	SH	E1F	3.342	3.312	3-5/8	1/2	1-5/8	1-1/4	0.656	1.313	0.500	1.90
QD30L100	30L100QD-SDS	30	SDS	E1F	3.581	3.551	3-13/16	1/2	2	1-1/4	0.656	1.313	0.500	2.20
QD32L100	32L100QD-SDS	32	SDS	E1F	3.820	3.790	4-1/16	1/2	2	1-1/4	0.656	1.313	0.500	2.70
QD36L100	36L100QD-SDS	36	SDS	B1F	4.297	4.267	4-17/32	1/2	2	1-1/4	0.156	1.313	-	3.30
QD40L100	40L100QD-SDS	40	SDS	B1F	4.775	4.745	5	1/2	2	1-1/4	0.156	1.313	-	3.80
QD44L100	44L100QD-SDS	44	SDS	B1F	5.252	5.222	5-31/64	1/2	2	1-1/4	0.156	1.313	-	4.50
QD48L100	48L100QD-SDS	48	SDS	B1F	5.730	5.700	6	1/2	2	1-1/4	0.156	1.313	-	5.30
QD60L100	60L100QD-SD	60	SD	B2	7.162	7.132	-	1/2	2	1-1/4	0.656	1.813	-	6.20
QD72L100	72L100QD-SD	72	SD	B3	8.594	8.564	-	1/2	2	1-1/4	0.656	1.813	-	8.00
QD84L100	84L100QD-SD	84	SD	B3	10.027	9.997	-	1/2	2	1-1/4	0.656	1.813	-	9.20

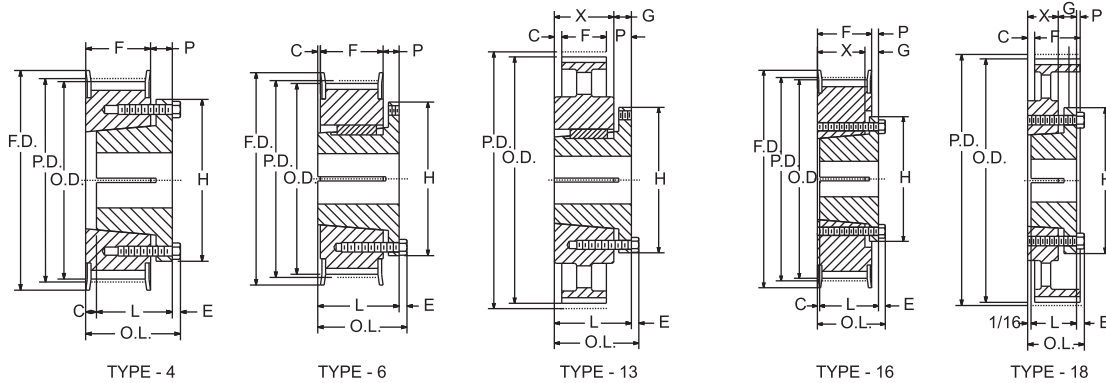
Note : Numerals in Type Designations mean: 1 = Solid, 2 = Web and 3 = Arm Construction; F = Flanged Pulley.

L TIMING BELT PULLEY - 3/8" PITCH (SPLIT TAPER (PST) BUSH)
STEEL
FOR 1/2" WIDE BELTS


3/8" PITCH (L) 1/2" WIDE BELTS																			
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS									WEIGHT (lbs.)
					P.D.	O.D.	F.D.	MIN.	MAX.	O.L.	F	L	P	C	H	G	X	E	
18LG050	18L050ST-G	18	G	4	2.149	2.119	2-7/16	3/8	1	1-3/8	3/4	1.000	0.438	3/16	2.000	-	-	3/16	0.50
19LG050	19L050ST-G	19	G	4	2.268	2.238	2-5/8	3/8	1	1-3/8	3/4	1.000	0.438	3/16	2.000	-	-	3/16	0.50
20LG050	20L050ST-G	20	G	4	2.387	2.357	2-5/8	3/8	1	1-3/8	3/4	1.000	0.438	3/16	2.000	-	-	3/16	0.60
21LG050	21L050ST-G	21	G	4	2.507	2.477	2-7/8	3/8	1	1-3/8	3/4	1.000	0.438	3/16	2.000	-	-	3/16	0.70
22LG050	22L050ST-G	22	G	4	2.626	2.596	2-7/8	3/8	1	1-3/8	3/4	1.000	0.438	3/16	2.000	-	-	3/16	0.80
24LH050	24L050ST-H	24	H	5	2.865	2.835	3-1/8	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	1.00
26LH050	26L050ST-H	26	H	5	3.104	3.074	3-3/8	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	1.00
28LH050	28L050ST-H	28	H	5	3.342	3.312	3-5/8	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	1.40
30LH050	30L050ST-H	30	H	5	3.581	3.551	3-13/16	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	1.90
32LH050	32L050ST-H	32	H	5	3.820	3.790	4-1/16	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	2.00
36LH050	36L050ST-H	36	H	5	4.297	4.267	4-11/16	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	2.50
36LP050	36L050ST-P1	36	P1	7	4.297	4.267	4-11/16	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	-	1.313	1/4	2.80
40LH050	40L050ST-H	40	H	5	4.775	4.745	5-1/2	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	3.50
40LP050	40L050ST-P1	40	P1	7	4.775	4.745	5-1/2	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	-	1.313	1/4	3.40
44LH050	44L050ST-H	44	H	5	5.252	5.222	5-1/2	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	4.00
44LP050	44L050ST-P1	44	P1	7	5.252	5.222	5-1/2	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	-	1.313	1/4	4.10
48LH050	48L050ST-H	48	H	5	5.730	5.700	6	3/8	1-1/2	1-7/16	3/4	1.250	0.438	1/16	2.500	-	-	3/16	4.90
48LP050	48L050ST-P1	48	P1	7	5.730	5.700	6	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	-	1.313	1/4	4.90
60LH050	60L050ST-H	60	H	17	7.162	7.132	-	3/8	1-1/2	1-1/2	3/4	1.250	0.438	1/16	2.500	0.438	0.875	3/16	4.30
60LP050	60L050ST-P1	60	P1	13	7.162	7.132	-	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	0.625	1.313	1/4	4.90
72LH050	72L050ST-H	72	H	17	8.594	8.564	-	3/8	1-1/2	1-1/2	3/4	1.250	0.438	1/8	2.500	0.438	0.875	3/16	5.30
72LP050	72L050ST-P1	72	P1	13	8.594	8.564	-	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	0.625	1.313	1/4	6.00
84LH050	84L050ST-H	84	H	17	10.027	9.997	-	3/8	1-1/2	1-1/2	3/4	1.250	0.438	1/8	2.500	0.438	0.875	3/16	6.20
84LP050	84L050ST-P1	84	P1	13	10.027	9.997	-	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	0.625	1.313	1/4	7.00
96LH050	96L050ST-H	96	H	17	11.459	11.429	-	3/8	1-1/2	1-1/2	3/4	1.250	0.438	1/8	2.500	0.438	0.875	3/16	7.30
96LP050	96L050ST-P1	96	P1	13	11.459	11.429	-	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	0.625	1.313	1/4	8.50
120LH050	120L050ST-H	120	H	17	14.324	14.294	-	3/8	1-1/2	1-1/2	3/4	1.250	0.438	1/8	2.500	0.438	0.875	3/16	9.50
120LP050	120L050ST-P1	120	P1	13	14.324	14.294	-	1/2	1-3/4	2-3/16	3/4	1.938	0.625	3/16	3.000	0.625	1.313	1/4	10.80

L TIMING BELT PULLEY - 3/8" PITCH (SPLIT TAPER (PST) BUSH)
STEEL
FOR 3/4" WIDE BELTS


3/8" PITCH (L) 3/4" WIDE BELTS (SPLIT TAPER BUSH)																				
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS			STOCK BORES		DIMENSIONS										WEIGHT (lbs.)
					P.D.	O.D.	F.D.	MIN.	MAX.	O.L.	F	L	P	C	H	G	X	E		
18LG075	18L075ST-G	18	G	4	2.149	2.119	2-7/16	3/8	1	1-5/8	1	1.000	0.438	0.438	2.000	-	-	0.188	0.60	
19LG075	19L075ST-G	19	G	4	2.268	2.238	2-5/8	3/8	1	1-5/8	1	1.000	0.438	0.438	2.000	-	-	0.188	0.80	
20LG075	20L075ST-G	20	G	4	2.387	2.357	2-5/8	3/8	1	1-5/8	1	1.000	0.438	0.438	2.000	-	-	0.188	0.80	
21LG075	21L075ST-G	21	G	4	2.507	2.477	2-7/8	3/8	1	1-5/8	1	1.000	0.438	0.438	2.000	-	-	0.188	1.00	
22LG075	22L075ST-G	22	G	4	2.626	2.596	2-7/8	3/8	1	1-5/8	1	1.000	0.438	0.438	2.000	-	-	0.188	1.10	
24LH075	24L075ST-H	24	H	4	2.865	2.835	3-1/8	3/8	1-1/2	1-5/8	1	1.250	0.438	0.188	2.500	-	-	0.188	1.10	
26LH075	26L075ST-H	26	H	4	3.104	3.074	3-3/8	3/8	1-1/2	1-5/8	1	1.250	0.438	0.188	2.500	-	-	0.188	1.50	
28LH075	28L075ST-H	28	H	4	3.342	3.312	3-5/8	3/8	1-1/2	1-5/8	1	1.250	0.438	0.188	2.500	-	-	0.188	1.80	
30LH075	30L075ST-H	30	H	16	3.581	3.551	3-13/16	3/8	1-1/2	1-7/16	1	1.250	0.250	0.000	2.500	0.438	0.813	0.188	1.90	
32LH075	32L075ST-H	32	H	16	3.820	3.790	4-1/16	3/8	1-1/2	1-7/16	1	1.250	0.250	0.000	2.500	0.438	0.813	0.188	2.30	
36LH075	36L075ST-H	36	H	16	4.297	4.267	4-11/16	3/8	1-1/2	1-7/16	1	1.250	0.250	0.000	2.500	0.438	0.813	0.188	3.00	
36LP075	36L075ST-P1	36	P1	7	4.297	4.267	4-11/16	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	-	1.313	0.250	3.90	
40LH075	40L075ST-H	40	H	16	4.775	4.745	5-1/2	3/8	1-1/2	1-7/16	1	1.250	0.250	0.000	2.500	0.438	0.813	0.188	3.80	
40LP075	40L075ST-P1	40	P1	7	4.775	4.745	5-1/2	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	-	1.313	0.250	3.90	
44LH075	44L075ST-H	44	H	16	5.252	5.222	5-1/2	3/8	1-1/2	1-7/16	1	1.250	0.250	0.000	2.500	0.438	0.813	0.188	4.90	
44LP075	44L075ST-P1	44	P1	7	5.252	5.222	5-1/2	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	-	1.313	0.250	4.90	
48LH075	48L075ST-H	48	H	16	5.730	5.700	6	3/8	1-1/2	1-7/16	1	1.250	0.250	0.000	2.500	0.438	0.813	0.188	5.80	
48LP075	48L075ST-P1	48	P1	7	5.730	5.700	6	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	0.625	1.313	0.250	5.90	
60LH075	60L075ST-H	60	H	17	7.162	7.132	-	3/8	1-1/2	1-7/16	1	1.250	0.250	0.063	2.500	0.438	0.875	0.188	4.60	
60LP075	60L075ST-P1	60	P1	13	7.162	7.132	-	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	0.625	1.313	0.250	5.30	
72LH075	72L075ST-H	72	H	17	8.594	8.564	-	3/8	1-1/2	1-7/16	1	1.250	0.250	0.063	2.500	0.438	0.875	0.188	5.60	
72LP075	72L075ST-P1	72	P1	13	8.594	8.564	-	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	0.625	1.313	0.250	6.60	
84LH075	84L075ST-H	84	H	17	10.027	9.997	-	3/8	1-1/2	1-7/16	1	1.250	0.250	0.063	2.500	0.438	0.875	0.188	6.70	
84LP075	84L075ST-P1	84	P1	13	10.027	9.997	-	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	0.625	1.313	0.250	7.50	
96LH075	96L075ST-H	96	H	17	11.459	11.429	-	3/8	1-1/2	1-7/16	1	1.250	0.250	0.063	2.500	0.438	0.875	0.188	7.90	
96LP075	96L075ST-P1	96	P1	13	11.459	11.429	-	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	0.625	1.313	0.250	8.80	
120LH075	120L075ST-H	120	H	17	14.324	14.294	-	3/8	1-1/2	1-7/16	1	1.250	0.250	0.063	2.500	0.438	0.875	0.188	10.40	
120LP075	120L075ST-P1	120	P1	13	14.324	14.294	-	1/2	1-3/4	2-3/16	1	1.938	0.625	0.313	3.000	0.625	1.313	0.250	11.40	

L TIMING BELT PULLEY - 3/8" PITCH (SPLIT TAPER (PST) BUSH)
STEEL
FOR 1" WIDE BELTS


3/8" PITCH (L) 1" WIDE BELTS (SPLIT TAPER BUSH)																			
OLD PART NUMBER	NEW PART NUMBER	NO. OF TEETH	BUSHING	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS								WEIGHT (lbs.)
					P.D.	O.D.	F.D.	O.L.	MIN.	MAX.	F	L	P	C	H	G	X	E	
18LG100	18L100ST-G	18	G	4	2.149	2.119	2-7/16	1-7/8	3/8	1	1-1/4	1.000	0.438	0.688	2.000	-	-	0.188	0.80
19LG100	19L100ST-G	19	G	4	2.268	2.238	2-5/8	1-7/8	3/8	1	1-1/4	1.000	0.438	0.688	2.000	-	-	0.188	1.00
20LG100	20L100ST-G	20	G	4	2.387	2.357	2-5/8	1-7/8	3/8	1	1-1/4	1.000	0.438	0.688	2.000	-	-	0.188	1.10
21LG100	21L100ST-G	21	G	4	2.507	2.477	2-7/8	1-7/8	3/8	1	1-1/4	1.000	0.438	0.688	2.000	-	-	0.188	1.30
22LG100	22L100ST-G	22	G	4	2.626	2.596	2-7/8	1-7/8	3/8	1	1-1/4	1.000	0.438	0.688	2.000	-	-	0.188	1.50
24LH100	24L100ST-H	24	H	4	2.865	2.835	3-1/8	1-7/8	3/8	1-1/2	1-1/4	1.250	0.438	0.438	2.500	-	-	0.188	1.50
26LH100	26L100ST-H	26	H	4	3.104	3.074	3-3/8	1-7/8	3/8	1-1/2	1-1/4	1.250	0.438	0.438	2.500	-	-	0.188	1.90
28LH100	28L100ST-H	28	H	4	3.342	3.312	3-5/8	1-7/8	3/8	1-1/2	1-1/4	1.250	0.438	0.438	2.500	-	-	0.188	2.30
30LH100	30L100ST-H	30	H	16	3.581	3.551	3-13/16	1-7/16	3/8	1-1/2	1-1/4	1.250	0.000	0.000	2.500	0.438	0.813	0.188	2.30
32LH100	32L100ST-H	32	H	16	3.820	3.790	4-1/16	1-7/16	3/8	1-1/2	1-1/4	1.250	0.000	0.000	2.500	0.438	0.813	0.188	2.70
36LH100	36L100ST-H	36	H	16	4.297	4.267	4-11/16	1-7/16	3/8	1-1/2	1-1/4	1.250	0.000	0.000	2.500	0.438	0.813	0.188	3.20
36LP100	36L100ST-P1	36	P1	6	4.297	4.267	4-11/16	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	-	-	0.250	3.90
40LH100	40L100ST-H	40	H	16	4.775	4.745	5-1/2	1-7/16	3/8	1-1/2	1-1/4	1.250	0.000	0.000	2.500	0.438	0.813	0.188	4.00
40LP100	40L100ST-P1	40	P1	6	4.775	4.745	5-1/2	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	-	-	0.250	5.00
44LH100	44L100ST-H	44	H	16	5.252	5.222	5-1/2	1-7/16	3/8	1-1/2	1-1/4	1.250	0.000	0.000	2.500	0.438	0.813	0.188	5.00
44LP100	44L100ST-P1	44	P1	6	5.252	5.222	5-1/2	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	-	-	0.250	6.30
48LH100	48L100ST-H	48	H	16	5.730	5.700	6	1-7/16	3/8	1-1/2	1-1/4	1.250	0.000	0.000	2.500	0.438	0.813	0.188	6.20
48LP100	48L100ST-P1	48	P1	6	5.730	5.700	6	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	-	-	0.250	7.80
60LH100	60L100ST-H	60	H	18	7.162	7.132	-	1-1/2	3/8	1-1/2	1-1/4	1.250	0.063	0.125	2.500	0.438	0.875	0.188	5.10
60LP100	60L100ST-P1	60	P1	13	7.162	7.132	-	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	0.625	1.313	0.250	5.90
72LH100	72L100ST-H	72	H	18	8.594	8.564	-	1-1/2	3/8	1-1/2	1-1/4	1.250	0.063	0.125	2.500	0.438	0.875	0.188	6.40
72LP100	72L100ST-P1	72	P1	13	8.594	8.564	-	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	0.625	1.313	0.250	7.60
84LH100	84L100ST-H	84	H	18	10.027	9.997	-	1-1/2	3/8	1-1/2	1-1/4	1.250	0.063	0.125	2.500	0.438	0.875	0.188	7.50
84LP100	84L100ST-P1	84	P1	13	10.027	9.997	-	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	0.625	1.313	0.250	8.20
96LH100	96L100ST-H	96	H	18	11.459	11.429	-	1-1/2	3/8	1-1/2	1-1/4	1.250	0.063	0.125	2.500	0.438	0.875	0.188	9.40
96LP100	96L100ST-P1	96	P1	13	11.459	11.429	-	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	0.625	1.313	0.250	9.50
120LH100	120L100ST-H	120	H	18	14.324	14.294	-	1-1/2	3/8	1-1/2	1-1/4	1.250	0.063	0.125	2.500	0.438	0.875	0.188	11.60
120LP100	120L100ST-P1	120	P1	13	14.324	14.294	-	2-3/16	1/2	1-3/4	1-1/4	1.938	0.625	0.063	3.000	0.625	1.313	0.250	12.10