


L TIMING PULLEY Stock - 3/8" PITCH

ALUMINUM / STEEL

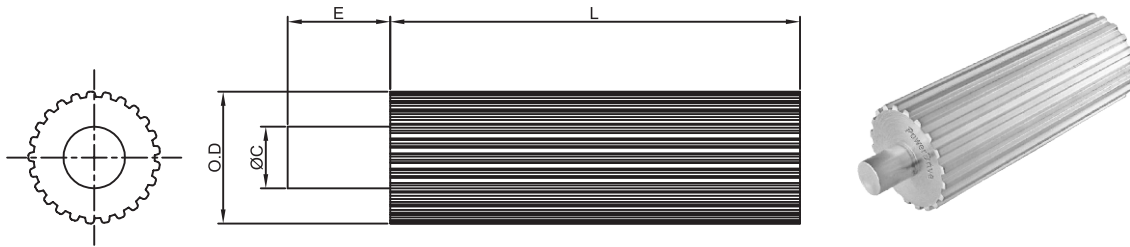


| L Timing Pulley Stock - 3/8" Pitch | | | | | | | |
|------------------------------------|-------------------|-----------------------|--------|--------|-----------------------------------|------------------|------------------------|
| ALUMINUM PART NUMBER | STEEL PART NUMBER | NO. OF TEETH/ GROOVES | P.D. | O.D. | MINIMUM USABLE LENGTH L (In Inch) | C Shank Diameter | Shank Length (In Inch) |
| 10-L-PS8A | 10-L-PS8S | 10 | 1.194" | 1.164" | 8 | 0.75 | 1.13" |
| 11-L-PS8A | 11-L-PS8S | 11 | 1.313" | 1.283" | 8 | 0.75 | 1.13" |
| 12-L-PS8A | 12-L-PS8S | 12 | 1.432" | 1.402" | 8 | 1.00 | 1.13" |
| 13-L-PS8A | 13-L-PS8S | 13 | 1.552" | 1.522" | 8 | 1.00 | 1.13" |
| 14-L-PS8A | 14-L-PS8S | 14 | 1.671" | 1.641" | 8 | 1.00 | 1.13" |
| 15-L-PS8A | 15-L-PS8S | 15 | 1.790" | 1.760" | 8 | 1.00 | 0.75" |
| 16-L-PS8A | 16-L-PS8S | 16 | 1.910" | 1.880" | 8 | 1.00 | 0.75" |
| 17-L-PS8A | 17-L-PS8S | 17 | 2.029" | 1.999" | 8 | 1.00 | 0.75" |
| 18-L-PS8A | 18-L-PS8S | 18 | 2.149" | 2.119" | 8 | 1.00 | 0.75" |
| 19-L-PS8A | 19-L-PS8S | 19 | 2.268" | 2.238" | 8 | 1.00 | 0.75" |
| 20-L-PS8A | 20-L-PS8S | 20 | 2.387" | 2.357" | 8 | 1.00 | 0.75" |
| 21-L-PS8A | 21-L-PS8S | 21 | 2.507" | 2.477" | 8 | 1.00 | 0.75" |
| 22-L-PS8A | 22-L-PS8S | 22 | 2.626" | 2.596" | 8 | 1.00 | 0.75" |
| 24-L-PS8A | 24-L-PS8S | 24 | 2.865" | 2.835" | 8 | 1.00 | 0.75" |
| 26-L-PS8A | 26-L-PS8S | 26 | 3.104" | 3.074" | 8 | 1.00 | 0.75" |
| 28-L-PS8A | 28-L-PS8S | 28 | 3.342" | 3.312" | 8 | 1.00 | 0.75" |
| 30-L-PS8A | 30-L-PS8S | 30 | 3.581" | 3.551" | 8 | 1.00 | 0.75" |
| 32-L-PS8A | 32-L-PS8S | 32 | 3.820" | 3.790" | 8 | 1.00 | 0.75" |
| 36-L-PS8A | 36-L-PS8S | 36 | 4.297" | 4.267" | 8 | 1.00 | 1.00" |

Note : Shank may or may not be available in some cases.

L TIMING PULLEY Stock - 3/8" PITCH

ALUMINUM / STEEL

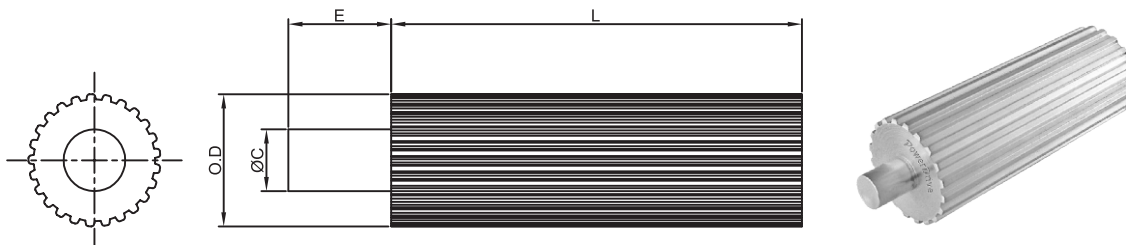

| L Timing Pulley Stock - 3/8" Pitch | | | | | | | |
|------------------------------------|-------------------|-----------------------|--------|--------|-----------------------------------|------------------|------------------------|
| ALUMINUM PART NUMBER | STEEL PART NUMBER | NO. OF TEETH/ GROOVES | P.D. | O.D. | MINIMUM USABLE LENGTH L (In Inch) | C Shank Diameter | Shank Length (In Inch) |
| 12-L-PS12A | 12-L-PS12S | 12 | 1.432" | 1.402" | 12 | 1 | 1.13" |
| 14-L-PS12A | 14-L-PS12S | 14 | 1.671" | 1.641" | 12 | 1 | 1.13" |
| 15-L-PS12A | 15-L-PS12S | 15 | 1.790" | 1.760" | 12 | 1 | 0.75" |
| 16-L-PS12A | 16-L-PS12S | 16 | 1.910" | 1.880" | 12 | 1 | 0.75" |
| 18-L-PS12A | 18-L-PS12S | 18 | 2.149" | 2.119" | 12 | 1 | 0.75" |
| 20-L-PS12A | 20-L-PS12S | 20 | 2.387" | 2.357" | 12 | 1 | 0.75" |
| 21-L-PS12A | 21-L-PS12S | 21 | 2.507" | 2.477" | 12 | 1 | 0.75" |
| 22-L-PS12A | 22-L-PS12S | 22 | 2.626" | 2.596" | 12 | 1 | 0.75" |
| 24-L-PS12A | 24-L-PS12S | 24 | 2.865" | 2.835" | 12 | 1 | 0.75" |
| 28-L-PS12A | 28-L-PS12S | 28 | 3.342" | 3.312" | 12 | 1 | 0.75" |
| 30-L-PS12A | 30-L-PS12S | 30 | 3.581" | 3.551" | 12 | 1 | 0.75" |
| 32-L-PS12A | 32-L-PS12S | 32 | 3.820" | 3.790" | 12 | 1 | 0.75" |
| 36-L-PS12A | 36-L-PS12S | 36 | 4.297" | 4.267" | 12 | 1 | 1.00" |

Note : Shank may or may not be available in some cases.