


FEATURES OF BAR STOCK PULLEY

FEATURES OF BAR STOCK PULLEY

1. You can make pulley of your choice.
2. Not limited to Standard sizes.
3. Not limited to material.
4. Corrosion resistance.
5. Light in weight and more durable.
6. Flanges are Available.

MP TIMING BELT PULLEY – 0.080" PITCH (MXL)

ALUMINUM

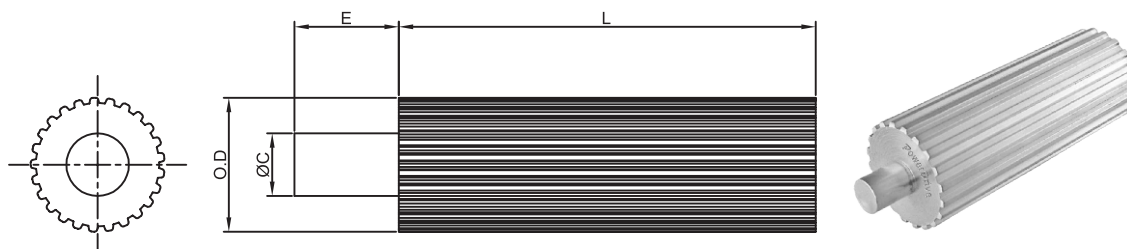


MXL Timing Pulley Stock - 0.080" Pitch						
PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (In Inch)	C Shank Diameter	Shank Length (In Inch)
10-MP-PS2A	10	0.255"	0.235"	2	0.31	1.00
11-MP-PS2A	11	0.280"	0.260"	2	0.31	1.00
12-MP-PS2A	12	0.306"	0.290"	2	0.31	1.00
13-MP-PS2A	13	0.331"	0.310"	2	0.38	1.00
14-MP-PS3A	14	0.357"	0.340"	3	0.38	1.00
15-MP-PS3A	15	0.382"	0.360"	3	0.44	1.00
16-MP-PS3A	16	0.407"	0.390"	3	0.44	1.00
17-MP-PS3A	17	0.433"	0.410"	3	0.44	1.00
18-MP-PS3A	18	0.458"	0.440"	3	0.5	1.00
19-MP-PS3A	19	0.484"	0.460"	3	0.5	1.00
20-MP-PS4A	20	0.509"	0.490"	4	0.38	0.88
21-MP-PS4A	21	0.535"	0.520"	4	0.38	0.88
22-MP-PS4A	22	0.560"	0.540"	4	0.38	0.88
23-MP-PS4A	23	0.586"	0.570"	4	0.38	0.88
24-MP-PS5A	24	0.611"	0.590"	5	0.5	0.75
25-MP-PS5A	25	0.637"	0.620"	5	0.5	0.75
26-MP-PS5A	26	0.662"	0.640"	5	0.5	0.75
27-MP-PS5A	27	0.687"	0.670"	5	0.5	0.75
28-MP-PS5A	28	0.713"	0.690"	5	0.5	0.75
29-MP-PS5A	29	0.738"	0.720"	5	0.5	0.75
30-MP-PS6A	30	0.764"	0.740"	6	0.5	0.75
31-MP-PS6A	31	0.789"	0.770"	6	0.5	0.75
32-MP-PS6A	32	0.815"	0.800"	6	0.5	0.75
33-MP-PS6A	33	0.840"	0.820"	6	0.5	0.75
34-MP-PS6A	34	0.866"	0.846"	6	0.5	0.75
35-MP-PS6A	35	0.891"	0.871"	6	0.5	0.75
36-MP-PS6A	36	0.917"	0.897"	6	0.5	0.75
37-MP-PS6A	37	0.942"	0.922"	6	0.5	0.75
38-MP-PS6A	38	0.968"	0.948"	6	0.5	0.75
39-MP-PS6A	39	0.993"	0.973"	6	0.5	0.75

Note : Shank may or may not be available in some cases.

MP TIMING BELT PULLEY – 0.080" PITCH (MXL)

ALUMINUM

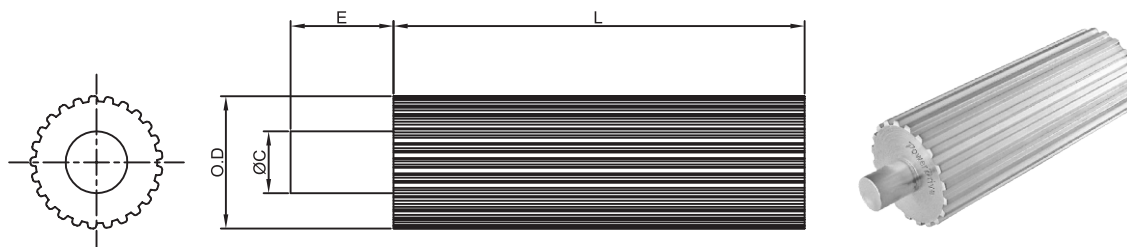

MXL Timing Pulley Stock - 0.080" Pitch						
PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (In Inch)	C Shank Diameter	Shank Length (In Inch)
40-MP-PS7A	40	1.019"	0.999"	7	0.5	0.75
42-MP-PS7A	42	1.070"	1.050"	7	0.5	0.75
44-MP-PS7A	44	1.120"	1.100"	7	0.5	0.75
45-MP-PS7A	45	1.146"	1.130"	7	0.5	0.75
48-MP-PS7A	48	1.222"	1.200"	7	0.5	0.75
49-MP-PS7A	49	1.248"	1.230"	7	0.5	0.75
50-MP-PS7A	50	1.273"	1.250"	7	0.5	0.75
51-MP-PS7A	51	1.299"	1.280"	7	0.5	0.75
52-MP-PS7A	52	1.324"	1.300"	7	0.5	0.75
54-MP-PS7A	54	1.375"	1.360"	7	0.5	0.75
55-MP-PS7A	55	1.401"	1.380"	7	0.5	0.75
56-MP-PS7A	56	1.426"	1.410"	7	0.5	0.75
57-MP-PS7A	57	1.451"	1.430"	7	0.5	0.75
60-MP-PS8A	60	1.528"	1.510"	8	0.5	0.75
64-MP-PS8A	64	1.630"	1.610"	8	0.5	0.75
65-MP-PS8A	65	1.655"	1.640"	8	0.5	0.75
66-MP-PS8A	66	1.681"	1.660"	8	0.5	0.75
70-MP-PS8A	70	1.783"	1.760"	8	0.5	0.75
72-MP-PS8A	72	1.833"	1.810"	8	0.5	0.75
75-MP-PS8A	75	1.910"	1.890"	8	0.5	0.75
80-MP-PS8A	80	2.037"	2.020"	8	0.75	0.75
82-MP-PS8A	82	2.088"	2.070"	8	0.75	0.75
84-MP-PS8A	84	2.139"	2.120"	8	0.75	0.75
88-MP-PS8A	88	2.241"	2.220"	8	0.75	0.75
90-MP-PS8A	90	2.292"	2.270"	8	0.75	0.75
96-MP-PS8A	96	2.445"	2.430"	8	0.75	0.75
98-MP-PS8A	98	2.496"	2.480"	8	0.75	0.75
100-MP-PS8A	100	2.546"	2.530"	8	0.75	0.75
102-MP-PS8A	102	2.597"	2.580"	8	0.75	0.75
108-MP-PS8A	108	2.750"	2.730"	8	0.75	0.75
110-MP-PS8A	110	2.801"	2.780"	8	0.75	0.75
120-MP-PS8A	120	3.056"	3.040"	8	0.75	0.75
130-MP-PS8A	130	3.310"	3.290"	8	0.75	0.75
140-MP-PS8A	140	3.565"	3.545"	8	0.75	0.75
150-MP-PS8A	150	3.820"	3.800"	8	0.75	0.75

Note : Shank may or may not be available in some cases.