


TIMING PULLEY Stock - T2.5MM PITCH

ALUMINUM

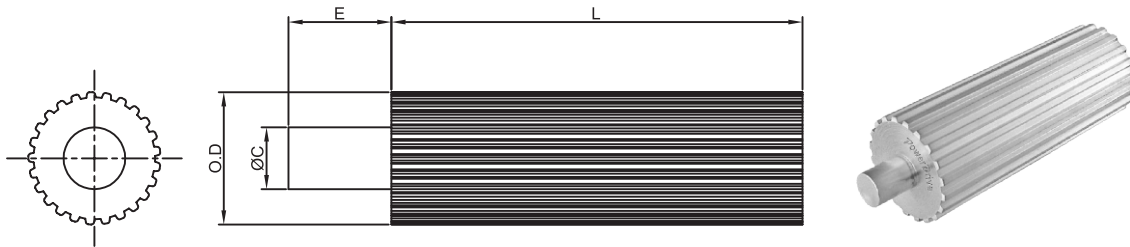

Timing Pulley Stock - T2.5 Pitch						
PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (IN MM)	C Shank Diameter	E Shank Length (In Inch)
10-T2.5-PS51A	10	0.317	0.293	50.8	0.314	1.00
12-T2.5-PS51A	12	0.378	0.354	50.8	0.375	1.00
13-T2.5-PS51A	13	0.409	0.386	50.8	0.437	1.00
14-T2.5-PS51A	14	0.441	0.417	50.8	0.437	1.00
15-T2.5-PS51A	15	0.472	0.449	50.8	0.500	1.00
16-T2.5-PS51A	16	0.504	0.480	50.8	0.500	1.00
17-T2.5-PS51A	17	0.535	0.512	50.8	0.375	1.00
18-T2.5-PS51A	18	0.567	0.543	50.8	0.375	1.00
19-T2.5-PS89A	19	0.598	0.575	88.9	0.375	1.00
20-T2.5-PS89A	20	0.630	0.606	88.9	0.500	1.00
21-T2.5-PS89A	21	0.661	0.638	88.9	0.500	1.00
22-T2.5-PS124.5A	22	0.693	0.669	124.46	0.500	1.00
24-T2.5-PS124.5A	24	0.754	0.730	124.46	0.500	1.00
25-T2.5-PS124.5A	25	0.785	0.762	124.46	0.500	1.00
26-T2.5-PS124.5A	26	0.817	0.793	124.46	0.500	1.00
27-T2.5-PS124.5A	27	0.848	0.825	124.46	0.500	1.00
28-T2.5-PS124.5A	28	0.880	0.856	124.46	0.500	1.00
29-T2.5-PS124.5A	29	0.911	0.888	124.46	0.500	1.00
30-T2.5-PS124.5A	30	0.943	0.919	124.46	0.500	1.00
32-T2.5-PS124.5A	32	1.006	0.982	124.46	0.500	1.00
34-T2.5-PS124.5A	34	1.069	1.045	124.46	0.500	1.00
35-T2.5-PS132A	35	1.100	1.077	132.08	0.500	1.00
36-T2.5-PS132A	36	1.132	1.108	132.08	0.500	1.00
38-T2.5-PS132A	38	1.193	1.169	132.08	0.500	1.00
40-T2.5-PS132A	40	1.256	1.232	132.08	0.500	1.00
42-T2.5-PS132A	42	1.319	1.295	132.08	0.500	1.00
44-T2.5-PS132A	44	1.382	1.358	132.08	0.500	1.00
46-T2.5-PS132A	46	1.413	1.390	132.08	0.500	1.00
48-T2.5-PS132A	48	1.508	1.484	132.08	0.500	1.00
50-T2.5-PS160A	50	1.570	1.547	160.02	0.500	1.00
60-T2.5-PS160A	60	1.884	1.860	160.02	0.500	1.00
65-T2.5-PS160A	65	2.039	2.016	160.02	0.750	1.00
70-T2.5-PS160A	70	2.197	2.173	160.02	0.750	1.00
72-T2.5-PS160A	72	2.260	2.236	160.02	0.750	1.00
90-T2.5-PS160A	90	2.824	2.800	160.02	0.750	1.00
100-T2.5-PS160A	100	3.137	3.113	160.02	0.750	1.00

Note : Shank may or may not be available in some cases.