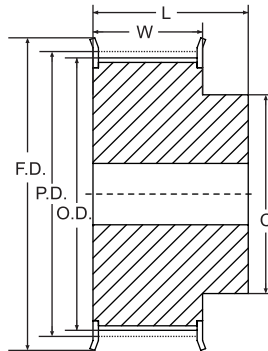



TIMING BELT PULLEY T5MM PITCH (TRAPEZOIDAL TEETH)
**ALUMINUM
CLEAR ANODIZED**
FOR 10MM,16MM WIDE BELTS

TYPE - 6F

TYPE - 6


Note : All Dimensions are in MM


5mm PITCH (T) 10mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
21 T5/10-2	10	6F	15.92	15.05	20	8	4	8	21	15	6	0.01
21 T5/12-2	12	6F	19.10	18.25	23	12	4	8	21	15	6	0.01
21 T5/14-2	14	6F	22.29	21.45	26	14	6	8	21	15	6	0.01
21 T5/15-2	15	6F	23.88	23.05	28	16	6	8	21	15	6	0.01
21 T5/16-2	16	6F	25.47	24.60	30	18	6	10	21	15	6	0.01
21 T5/18-2	18	6F	28.65	27.80	33	20	6	10	21	15	6	0.01
21 T5/19-2	19	6F	30.25	29.40	34	22	6	10	21	15	6	0.01
21 T5/20-2	20	6F	31.83	31.00	36	24	6	10	21	15	6	0.01
21 T5/24-2	24	6F	38.21	37.40	42	26	6	10	21	15	6	0.02
21 T5/25-2	25	6F	39.80	38.95	43	26	6	10	21	15	6	0.02
21 T5/27-2	27	6F	42.98	42.20	47	30	8	10	21	15	6	0.02
21 T5/30-2	30	6F	47.76	46.95	51	34	8	10	21	15	6	0.03
21 T5/32-2	32	6F	50.94	50.10	55	38	8	10	21	15	6	0.03
21 T5/36-2	36	6F	57.31	56.45	61	38	8	10	21	15	6	0.04
21 T5/40-2	40	6F	63.66	62.85	67	40	8	10	21	15	6	0.05
21 T5/48-0	48	6	76.42	75.55	-	50	8	10	21	15	6	0.07
21 T5/60-0	60	6	95.52	94.65	-	65	8	10	21	15	6	0.11

5mm PITCH (T) 16mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
27 T5/10-2	10	6F	15.92	15.05	20	8	4	8	27	21	6	0.01
27 T5/12-2	12	6F	19.10	18.25	23	12	4	8	27	21	6	0.01
27 T5/14-2	14	6F	22.29	21.45	26	14	6	8	27	21	6	0.01
27 T5/15-2	15	6F	23.88	23.05	28	16	6	8	27	21	6	0.01
27 T5/16-2	16	6F	25.47	24.60	30	18	6	10	27	21	6	0.01
27 T5/18-2	18	6F	28.65	27.80	33	20	6	10	27	21	6	0.01
27 T5/19-2	19	6F	30.25	29.40	34	22	6	10	27	21	6	0.01
27 T5/20-2	20	6F	31.83	31.00	36	24	6	10	27	21	6	0.01
27 T5/24-2	24	6F	38.21	37.40	42	26	6	10	27	21	6	0.02
27 T5/25-2	25	6F	39.80	38.95	43	26	6	10	27	21	6	0.02
27 T5/27-2	27	6F	42.98	42.20	47	30	8	10	27	21	6	0.02
27 T5/30-2	30	6F	47.76	46.95	51	34	8	10	27	21	6	0.03
27 T5/32-2	32	6F	50.94	50.10	55	38	8	12	27	21	6	0.03
27 T5/36-2	36	6F	57.31	56.45	61	38	8	12	27	21	6	0.04
27 T5/40-2	40	6F	63.66	62.85	67	40	8	12	27	21	6	0.05
27 T5/48-0	48	6	76.42	75.55	-	50	8	12	27	21	6	0.07
27 T5/60-0	60	6	95.52	94.65	-	65	8	12	27	21	6	0.11


Note : Part number listed are for Stock bore.

Rework services are available to accommodate Max Bore Size

Drill & Tap Set Screw holes as per request.

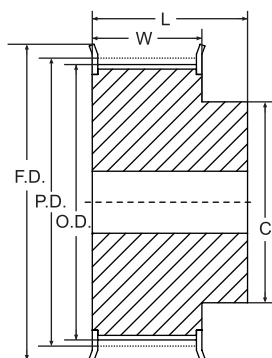TIMING BELT PULLEY T5MM PITCH (TRAPEZOIDAL TEETH)
**ALUMINUM
CLEAR ANODIZED**
FOR 25MM WIDE BELTS


TYPE - 6F



TYPE - 6



Note : All Dimensions are in MM

5mm PITCH (T) 25mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
36 T5/10-2	10	6F	15.92	15.05	20	8	4	-	36	30	6	0.01
36 T5/12-2	12	6F	19.10	18.25	23	12	4	-	36	30	6	0.01
36 T5/14-2	14	6F	22.29	21.45	26	14	6	8	36	30	6	0.01
36 T5/15-2	15	6F	23.88	23.05	28	16	6	8	36	30	6	0.01
36 T5/16-2	16	6F	25.47	24.60	30	18	6	10	36	30	6	0.01
36 T5/18-2	18	6F	28.65	27.80	33	20	6	10	36	30	6	0.01
36 T5/19-2	19	6F	30.25	29.40	34	22	6	10	36	30	6	0.01
36 T5/20-2	20	6F	31.83	31.00	36	24	6	10	36	30	6	0.01
36 T5/24-2	24	6F	38.21	37.40	42	26	8	10	36	30	6	0.01
36 T5/25-2	25	6F	39.80	38.95	43	26	8	10	36	30	6	0.02
36 T5/27-2	27	6F	42.98	42.20	47	30	8	10	36	30	6	0.02
36 T5/30-2	30	6F	47.76	46.95	51	34	8	10	36	30	6	0.02
36 T5/32-2	32	6F	50.94	50.10	55	38	8	12	36	30	6	0.03
36 T5/36-2	36	6F	57.31	56.45	61	38	8	12	36	30	6	0.04
36 T5/40-2	40	6F	63.66	62.85	67	40	8	12	36	30	6	0.05
36 T5/48-0	48	6	76.42	75.55	-	50	8	12	36	30	6	0.07
36 T5/60-0	60	6	95.52	94.65	-	65	8	12	36	30	6	0.11

Note : Part number listed are for Stock bore
 Rework services are available to accommodate Max Bore Size
 Drill & Tap Set Screw holes as per request.