

INDEX

Mounted Ball Bearing Units and Insert Bearings (Inch / mm)

Solid Base Pillow Blocks - Setscrew Locking

Series	Bearing Inner Ring	Shaft Height	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCP	Wide	High	Standard	1/2 - 3	12 - 75	1
UCAK	Wide	Low	Standard	1/2 - 3	12 - 75	2
UCPX	Wide	High	Medium	7/8 - 3	-	3
UCPA	Wide	High	Standard	1/2 - 2	-	4
SBP	Narrow	High	Standard	1/2 - 1 1/2	-	5
SBAK	Narrow	Low	Standard	3/4 - 1 1/2	-	5
SBLP	Narrow	High	Light	1/2 - 1 1/2	-	6
SBPSD	Narrow	High	Light / Ductile Iron	1/2 - 1 7/16	-	7

Solid Base Pillow Blocks - Eccentric Locking Collar

Series	Bearing Inner Ring	Shaft Height	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCP	Wide	High	Standard	5/8 - 3	20 - 60	8
HCAK	Wide	Low	Standard	3/4 - 3	20 - 60	9
SAP	Narrow	High	Standard	1/2 - 1 1/2	-	10
SAAK	Narrow	Low	Light	3/4 - 1 1/2	-	10
SALP	Narrow	High	Light	1/2 - 1 1/2	-	11
SAPSD	Narrow	High	Light / Ductile Iron	1/2 - 1 7/16	-	12


2 - Bolt Flange Blocks - Setscrew Locking

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCFL	Wide	Oval	Standard	1/2 - 2 1/2	12 - 65	13
UCFT	Wide	Oval	Standard	1/2 - 2 3/16	12 - 55	14
SBFT	Narrow	Oval	Standard	1/2 - 2 7/16	-	15
SBFL	Narrow	Oval	Light	1/2 - 1 1/2	-	16
SBFTN	Narrow	Oval	Light	1/2 - 1 3/4	-	17
SBLF	Narrow	Oval	Light	1/2 - 1 7/16	-	18
SBFTD	Narrow	Oval / Square Holes	Light / Ductile Iron	1/2 - 1 7/16	-	19

2 - Bolt Flange Blocks - Eccentric Locking Collar


Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCFT	Wide	Oval	Standard	1/2 - 2 7/16	20 - 60	20
SAFT	Narrow	Oval	Standard	1/2 - 2 7/16	-	21
SAFL	Narrow	Oval	Light	1/2 - 1 1/2	-	22
SAFTN	Narrow	Oval	Light	1/2 - 1 3/4	-	23
SALF	Narrow	Oval	Light	1/2 - 1 7/16	-	24
SAFTD	Narrow	Oval / Square Holes	Light / Ductile Iron	1/2 - 1 7/16	-	25

Standard 2 Bolt * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

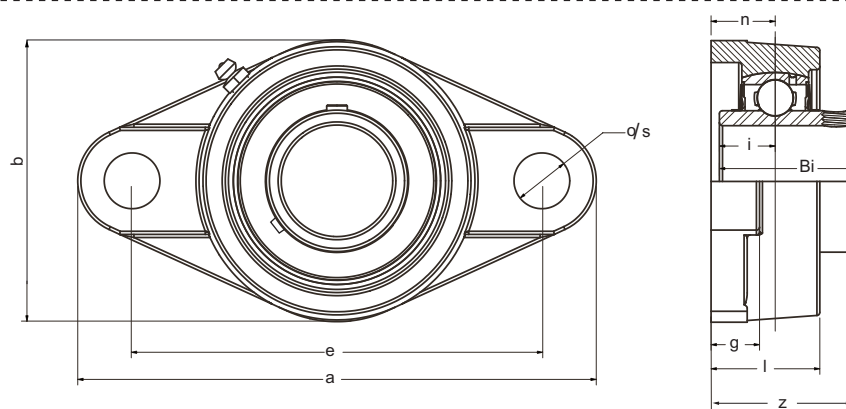


Unit no.	Shaft Dia.		Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight Lbs
	Inch	mm	a	e	g	l	s	b	z	Bi	n				
UCFL201		12											UC201		
UCFL201-8	1/2	15											UC201-8		
UCFL202		15											UC202		
UCFL202-10	5/8	17	4 7/16	3 35/64	7/16	1	15/32	2 3/8	1 5/16	1.2205	0.5000	3/8	UC202-10	FL204	1.10
UCFL203		17											UC203		
UCFL203-11	11/16	20											UC203-11		
UCFL204		20											UC204		
UCFL204-12	3/4												UC204-12		
UCFL205		25											UC205		
UCFL205-14	7/8		5 1/8	3 57/64	1/2	1 1/16	5/8	2 11/16	1 15/32	1.3386	0.5630	1/2	UC205-14	FL205	1.54
UCFL205-15	15/16												UC205-15		
UCFL205-16	1												UC205-16		
UCFL206		30											UC206		
UCFL206-17	1 1/16		5 13/16	4 39/64	1/2	1 7/32	5/8	3 5/32	1 19/32	1.5000	0.6250	1/2	UC206-17	FL206	2.16
UCFL206-18	1 1/8												UC206-18		
UCFL206-19	1 3/16												UC206-19		
UCFL206-20	1 1/4												UC206-20		
UCFL207		35											UC207		
UCFL207-20	1 1/4		6 11/32	5 1/8	9/16	1 11/32	5/8	3 17/32	1 3/4	1.6890	0.6890	1/2	UC207-20	FL207	2.98
UCFL207-21	1 5/16												UC207-21		
UCFL207-22	1 3/8												UC207-22		
UCFL207-23	1 7/16												UC207-23		
UCFL208		40											UC208		
UCFL208-24	1 1/2		6 7/8	5 43/64	9/16	1 13/32	5/8	3 15/16	2 1/64	1.9370	0.7480	1/2	UC208-24	FL208	3.73
UCFL208-25	1 9/16												UC208-25		
UCFL209		45											UC209		
UCFL209-26	1 5/8		7 13/32	5 53/64	19/32	1 1/2	3/4	4 1/4	2 1/16	1.9370	0.7480	5/8	UC209-26	FL204	4.50
UCFL209-27	1 11/16												UC209-27		
UCFL209-28	1 3/4												UC209-28		
UCFL210		50											UC210		
UCFL210-30	1 7/8		7 3/4	6 3/16	19/32	1 9/16	3/4	4 17/32	2 5/32	2.0315	0.7480	5/8	UC210-30	FL205	5.07
UCFL210-31	1 15/16												UC210-31		
UCFL210-32	2												UC210-32		
UCFL211		55											UC211		
UCFL211-32	2		8 13/16	7 1/4	23/32	1 11/16	3/4	5 1/8	2 5/16	2.1890	0.8740	5/8	UC211-32	FL206	7.28
UCFL211-34	2 1/8												UC211-34		
UCFL211-35	2 3/16												UC211-35		
UCFL212		60											UC212		
UCFL212-36	2 1/4		9 27/32	7 61/64	23/32	1 7/8	29/32	5 1/2	2 23/32	2.5630	1.0000	3/4	UC212-36	FL207	9.48
UCFL212-38	2 3/8												UC212-38		
UCFL212-39	2 7/16												UC212-39		
UCFL213		65											UC213		
UCFL213-40	2 1/2		10 5/32	8 17/64	25/32	1 31/32	29/32	6 3/32	2 3/4	2.5630	1.0000	3/4	UC213-40	FL208	11.90

2 Bolt Flange * Wide Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

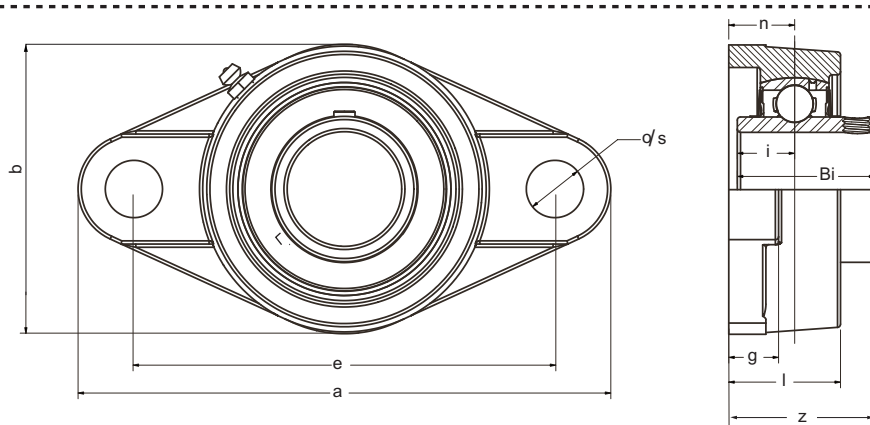


Unit no.	Shaft Dia.		Dimensions (Inch)										Bolt Size	Bearing No.	Housing No.	Weight lbs.
	Inch	mm	a	e	i	g	l	s	b	z	Bi	n				
UCFT201		12												UC201		
UCFT201-8	1/2	15												UC201-8		
UCFT202		17												UC202		
UCFT202-10	5/8	20												UC202-10		
UCFT203		20	4 13/32	3 17/32	3/4	7/16	1 5/32	13/32	2 3/8	1 25/32	1.2205	0.5000	5/16	UC203	FT204	1.28
UCFT203-11	11/16													UC203-11		
UCFT204		25												UC204		
UCFT204-12	3/4													UC204-12		
UCFT205		30												UC205		
UCFT205-14	7/8													UC205-14		
UCFT205-15	15/16		4 7/8	3 57/64	25/32	17/32	1 7/32	1/2	2 3/4	1 27/32	1.3386	0.5630	3/8	UC205-15	FT205	1.83
UCFT205-16	1													UC205-16		
UCFT206		35												UC206		
UCFT206-17	1 1/16													UC206-17		
UCFT206-18	1 1/8		5 9/16	4 19/32	53/64	17/32	1 11/32	1/2	3 1/4	2	1.5000	0.6260	3/8	UC206-18	FT206	2.32
UCFT206-19	1 3/16													UC206-19		
UCFT206-20	1 1/4													UC206-20		
UCFT207		40												UC207		
UCFT207-20	1 1/4													UC207-20		
UCFT207-21	1 5/16		6 1/8	5 1/8	27/32	9/16	1 7/16	35/64	3 3/4	2 1/8	1.6890	0.6890	7/16	UC207-21	FT207	3.46
UCFT207-22	1 3/8													UC207-22		
UCFT207-23	1 7/16													UC207-23		
UCFT208		45												UC208		
UCFT208-24	1 1/2		6 3/4	5 21/32	15/16	9/16	1 17/32	35/64	4 1/8	2 5/16	1.9370	0.7480	7/16	UC208-24	FT208	4.34
UCFT208-25	1 9/16													UC208-25		
UCFT209		50												UC209		
UCFT209-26	1 5/8													UC209-26		
UCFT209-27	1 11/16		7 1/16	5 27/32	15/16	9/16	1 9/16	5/8	4 3/8	2 5/16	1.9370	0.7480	1/2	UC209-27	FT209	5.12
UCFT209-28	1 3/4													UC209-28		
UCFT210		55												UC210		
UCFT210-30	1 7/8													UC210-30		
UCFT210-31	1 15/16		7 7/16	6 3/16	1 1/8	9/16	1 27/32	5/8	4 9/16	2 5/8	2.0315	0.7480	1/2	UC210-31	FT210	5.95
UCFT210-32	2													UC210-32		
UCFT211														UC211		
UCFT211-32	2		8 1/2	7 1/4	1 17/64	13/16	1 31/32	45/64	5 1/4	2 31/32	2.1890	0.8740	9/16	UC211-32	FT211	8.95
UCFT211-34	2 1/8													UC211-34		
UCFT211-35	2 3/16													UC211-35		

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

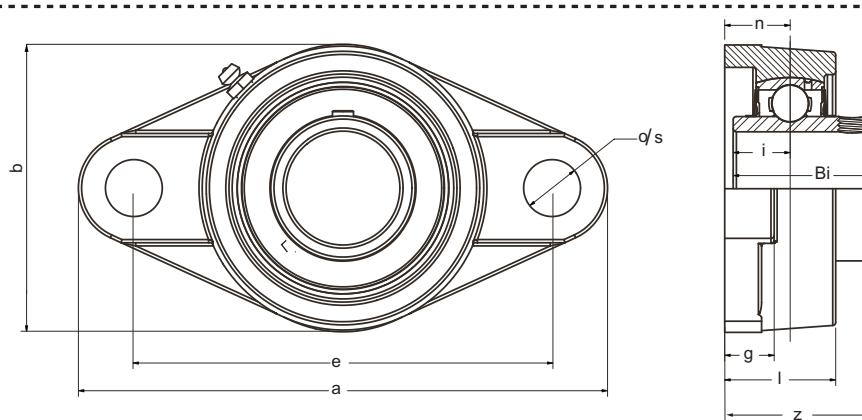


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	b	z	Bi	n				
SBFT201-8 SBFT202-10	1/2 5/8	3 7/8	3	45/64	7/16	1	25/64	2 11/64	1 21/64	0.866	0.236	5/16	SB201-8 SB202-10	FT203	0.85
SBFT204-12	3/4	4 13/32	3 17/32	3/4	7/16	1 5/32	13/32	2 3/8	1 7/16	0.984	0.275	5/16	SB204-12	FT204	1.21
SBFT205-14 SBFT205-15 SBFT205-16	7/8 15/16 1	4 7/8	3 57/64	25/32	17/32	1 7/32	1/2	2 3/4	1 35/64	1.062	0.296	3/8	SB205-14 SB205-15 SB205-16	FT205	1.76
SBFT206-17 SBFT206-18 SBFT206-19 SBFT206-20	1 1/16 1 1/8 1 3/16 1 1/4	5 9/16	4 19/32	53/64	17/32	1 11/32	1/2	3 1/4	1 11/16	1.181	0.315	3/8	SB206-17 SB206-18 SB206-19 SB206-20	FT206	2.16
SBFT207-20 SBFT207-21 SBFT207-22 SBFT207-23	1 1/4 1 5/16 1 3/8 1 7/16	6 1/8	5 1/8	27/32	9/16	1 7/16	35/64	3 3/4	1 25/32	1.259	0.335	7/16	SB207-20 SB207-21 SB207-22 SB207-23	FT207	3.26
SBFT208-24	1 1/2	6 3/4	5 21/32	15/16	9/16	1 17/32	35/64	4 1/8	1 59/64	1.338	0.354	7/16	SB208-24	FT208	4.17
SBFT209-26 SBFT209-27 SBFT209-28	1 5/8 1 11/16 1 3/4	7 1/16	5 27/32	15/16	9/16	1 9/16	5/8	4 3/8	2 3/64	1 5/8	0.402	1/2	SB209-26 SB209-27 SB209-28	FT209	4.10
SBFT210-30 SBFT210-31	1 7/8 1 15/16	7 7/16	6 3/16	1 3/8	9/16	1 27/32	5/8	4 9/16	2 5/32	1 23/32	0.430	1/2	SB210-30 SB210-31	FT210	4.4
SBFT211-32 SBFT211-34 SBFT211-35	2 2 1/8 2 3/16	8 1/2	7 1/4	1 17/64	13/16	1 31/32	45/64	5 1/4	2 5/16	1 25/37	0.466	9/16	SB211-32 SB211-34 SB211-35	FT211	7.2
SBFT212-36 SBFT212-38 SBFT212-39	2 1/4 2 3/8 2 7/16	9 5/16	7 15/16	1 23/64	13/16	2 3/32	23/32	5 17/32	2 11/16	2 1/8	0.585	9/16	SB212-36 SB212-38 SB212-39	FT212	8.9

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

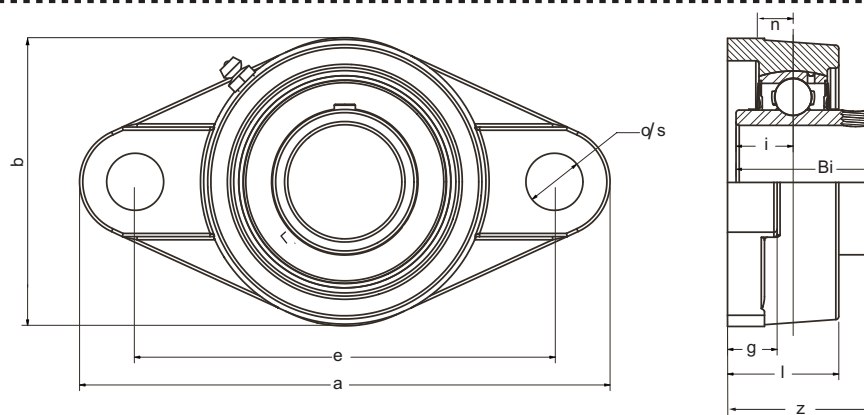


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	i	g	l	s	b	z	Bi	n				
SBFL201-8	1/2	3 7/8	3	19/32	7/16	1	25/32	2 7/32	1 17/32	0.866	0.236	5/16	SB201-8	FL203	0.85
SBFL202-10	5/8												SB202-10		
SBFL204-12	3/4	4 7/16	3 35/64	19/32	7/16	1	15/32	2 3/8	1 5/16	0.984	0.275	3/8	SB204-12	FL204	1.04
SBFL205-14	7/8												SB205-14		
SBFL205-15	15/16	5 1/8	3 57/64	5/8	1/2	1 1/16	5/8	2 11/16	1 15/32	1.062	0.295	1/2	SB205-15	FL205	1.48
SBFL205-16	1												SB205-16		
SBFL206-17	1 1/16												SB206-17		
SBFL206-18	1 1/8	5 13/16	4 39/64	45/64	1/2	1 7/32	5/8	3 5/32	1 19/32	1.181	0.315	1/2	SB206-18	FL206	2.01
SBFL206-19	1 3/16												SB206-19		
SBFL206-20	1 1/4												SB206-20		
SBFL207-20	1 1/4												SB207-20		
SBFL207-21	1 5/16	6 11/32	5 1/8	3/4	9/16	1 11/32	5/8	3 17/32	1 3/4	1.259	0.335	1/2	SB207-21	FL207	2.78
SBFL207-22	1 3/8												SB207-22		
SBFL207-23	1 7/16												SB207-23		
SBFL208-24	1 1/2	6 7/8	5 43/64	53/64	9/16	1 13/32	5/8	3 15/16	2 1/64	1.338	0.354	1/2	SB208-24	FL208	3.55

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin
Narrow Housing

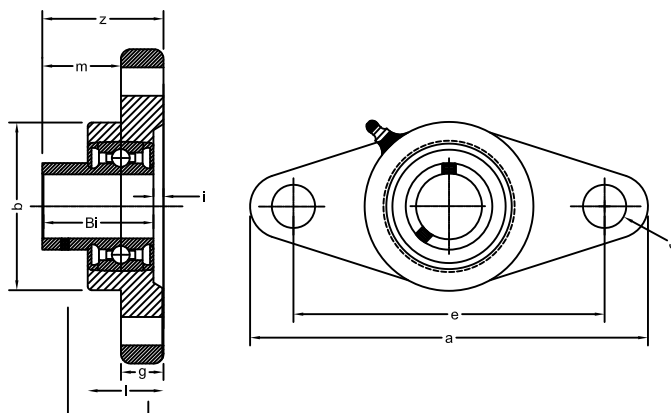


Unit no.	Shaft Dia.	Dimensions (Inch)										Bolt Size Inch	Bearing No.	Housing No.
	Inch	a	e	i	g	l	s	b	z	Bi	m			
SBFTN201-8	1/2	3 7/8	3	0.448	3/8	23/32	7/16	2 1/8	1.087	0.866	0.630	3/8	SB201-8	FTN203
SBFTN202-10	5/8												SB202-10	
SBFTN204-12	3/4	4 13/32	3 17/32	0.495	7/16	13/16	7/16	2 1/2	1.203	0.984	0.708	3/8	SB204-12	FTN204
SBFTN205-14	7/8												SB205-14	
SBFTN205-15	15/16	4 7/8	3 57/64	0.483	7/16	13/16	33/64	2 3/4	1.250	1.062	0.767	7/16	SB205-15	FTN205
SBFTN205-16	1												SB205-16	
SBFTN206-17	1 1/16												SB206-17	
SBFTN206-18	1 1/8	5 9/16	4 19/32	0.478	17/32	61/64	33/64	3 1/8	1.344	1.181	0.866	7/16	SB206-18	FTN206
SBFTN206-19	1 3/16												SB206-19	
SBFTN206-20	1 1/4												SB206-20	
SBFTN207-20	1 1/4												SB207-20	
SBFTN207-21	1 5/16	6 1/8	5 1/8	0.575	19/32	1 3/64	35/64	3 5/8	1.500	1.259	0.925	1/2	SB207-21	FTN207
SBFTN207-22	1 3/8												SB207-22	
SBFTN207-23	1 7/16												SB207-23	
SBFTN208-24	1 1/2	6 3/4	5 21/32	0.610	5/8	1 1/8	35/64	4 1/8	1.594	1.338	0.984	1/2	SB208-24	FTN208
SBFTN208-25	1 9/16												SB208-25	
SBFTN209-26	1 5/8	7 1/16	5 27/32	0.544	5/8	1 1/8	5/8	4 3/8	1.610	1.439	1.066	9/16	SB209-26	FTN209
SBFTN209-27	1 11/16												SB209-27	
SBFTN209-28	1 3/4												SB209-28	

2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
High Grade Cast Iron Housing * Relubricatable with Anti-Rotation Pin

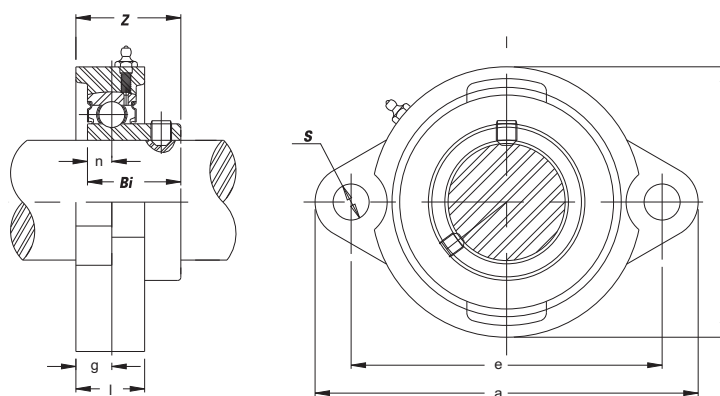

Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	g	l	s	b	z	Bi	n				
SBLF201-8	1/2	3 3/16	2 1/2	3/8	23/32	5/16	2 7/32	1	0.866	0.236	1/4	SB201-8	LF203	0.60
SBLF202-10	5/8											SB202-10		
SBLF204-12	3/4	3 17/32	2 13/16	7/16	25/32	25/64	2 13/32	1 5/32	0.984	0.275	5/16	SB204-12	LF204	0.66
SBLF205-14	7/8											SB205-14		
SBLF205-15	15/16	3 3/4	2 63/64	7/16	25/32	25/64	2 17/32	1 3/16	1.062	0.295	5/16	SB205-15	LF205	0.86
SBLF205-16	1											SB205-16		
SBLF206-17	1 1/16											SB206-17		
SBLF206-18	1 1/8	4 7/16	3 9/16	15/32	7/8	15/32	3	1 11/32	1.181	0.315	3/8	SB206-18	LF206	1.23
SBLF206-19	1 3/16											SB206-19		
SBLF206-20	1 1/4											SB206-20		
SBLF207-20	1 1/4											SB207-20		
SBLF207-21	1 5/16	4 13/16	3 15/16	33/64	15/16	15/32	3 1/2	1 7/16	1.259	0.335	3/8	SB207-21	LF207	1.70
SBLF207-22	1 3/8											SB207-22		
SBLF207-23	1 7/16											SB207-23		

**2 Bolt Flange * Narrow Inner Ring Bearing * Set Screw Locking
Ductile Iron Housing * Relubricatable with Anti-Rotation Pin**

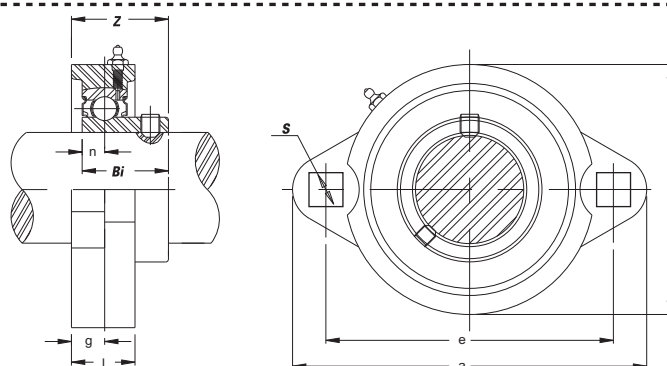

Unit no.	Shaft Dia.	Dimensions (Inch)									Bolt Size Inch	Bearing No.	Housing No.	Weight lbs.
	Inch	a	e	g	l	s	b	z	Bi	n				
SBFTD201-8 SBFTD202-10	1/2 5/8	3 1/4	2 9/16	27/64	23/32	9/32	2 9/32	1 7/64	0.866	0.236	1/4	SB201-8 SB202-10	PFTD203	0.51
SBFTD204-12	3/4	3 11/16	2 13/16	7/16	49/64	11/32	2 39/64	1 13/64	0.984	0.275	5/16	SB204-12	PFTD204	0.60
SBFTD205-14 SBFTD205-15 SBFTD205-16	7/8 15/16 1	3 7/8	3	7/16	51/64	11/32	2 23/32	1 17/64	1.062	0.295	5/16	SB205-14 SB205-15 SB205-16	PFTD205	0.84
SBFTD206-17 SBFTD206-18 SBFTD206-19 SBFTD206-20	1 1/16 1 1/8 1 3/16 1 1/4	4 9/16	3 17/32	1/2	55/64	13/32	3 13/64	1 13/32	1.181	0.315	3/8	SB206-17 SB206-18 SB206-19 SB206-20	PFTD206	1.19
SBFTD207-20 SBFTD207-21 SBFTD207-22 SBFTD207-23	1 1/4 1 5/16 1 3/8 1 7/16	4 13/16	3 15/16	1/2	15/16	13/32	3 33/64	1 17/32	1.181	0.315	3/8	SB207-20 SB207-21 SB207-22 SB207-23	PFTD207	1.57