

4 - Bolt Flange Blocks - Setscrew Locking

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCF	Wide	Square	Standard	1/2 - 3	12 - 75	26
UCFS	Wide	Square	Standard	1/2 - 2 7/16	12 - 60	27
UCFX	Wide	Square	Medium	7/8 - 3	-	28
SBF	Narrow	Square	Standard	1/2 - 1 1/2	-	29
SBFS	Narrow	Square	Light	3/4 - 1 1/2	-	30
SBFN	Narrow	Square	Light	1/2 - 1 3/4	-	31
UCFC	Wide	Round Cartridge	Standard	1/2 - 2 1/2	-	32

4 - Bolt Flange Blocks - Eccentric Locking Collar

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCFS	Wide	Square	Standard	3/4 - 2 7/16	20- 60	33
SAF	Narrow	Square	Standard	1/2 - 1 1/2	-	34
SAFS	Narrow	Square	Standard	3/4 - 1 1/2	-	35
SAFN	Narrow	Square	Light	1/2 - 1 3/4	-	36

3 - Bolt Flange Blocks - Ductile Iron Housing

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
SBFCT	Narrow	Set Screw	Light	1/2 - 1 7/16	-	37
SAFCT	Narrow	Eccentric Collar	Light	1/2 - 1 7/16	-	38

Screw Conveyor Hanger Unit

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCSH	Wide	Set Screw	Threaded Base	1/2 - 2	-	39

Take- Up Units - Wide Slot

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCST	Wide	Set Screw	Standard	1/2 - 2 1/2	12 - 65	40
HCST	Wide	Eccentric Collar	Standard	1/2 - 2 7/16	20 - 60	41


Rubber Mounted - Cylindrical Cartridge

Series	Bearing Inner Ring	Locking type	Housing	Shaft Diameter		Page
				Inch	MM	
RCSMS	Narrow	Set Screw	Rubber Grommet	1/2 - 1	-	42
RCSM	Narrow	Eccentric Collar	Rubber Grommet	1/2 - 1	-	42

Rubber Mounted - Spherical Cartridge

Series	Bearing Inner Ring	Locking type	Housing	Shaft Diameter		Page
				Inch	MM	
SBR	Narrow	Set Screw	Rubber Grommet	1/2 - 1 1/4	-	43
SAR	Narrow	Eccentric Collar	Rubber Grommet	1/2 - 1 1/4	-	43

RCSMS - Narrow Inner Ring Bearing * Set Screw Locking
RCSM - Narrow Inner Ring Bearing * Eccentric Locking Collar
Cylindrical OD Rubber Cartridge

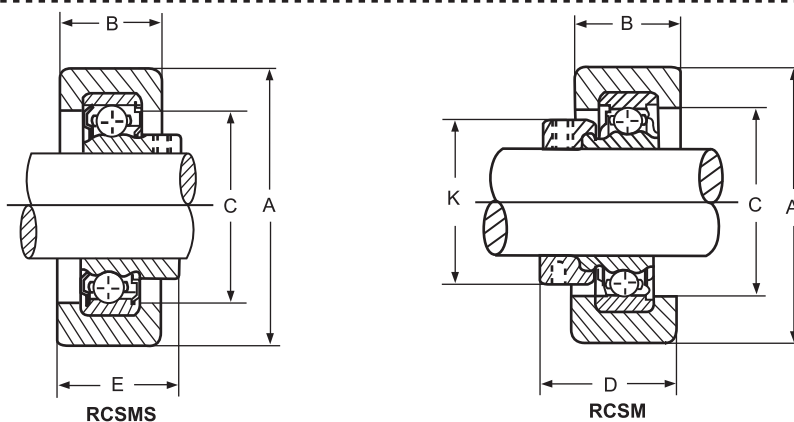

Unit No.	Shaft	Dimensions (Inch)						Bearing	Rubber	Weight
Set Screw Type	Dia.	A	B	C	D	E	K	No.	Ring No.	lbs.
RCSMS201-8	1/2	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSB201-8	RC-3	.35
RCSMS202-10	5/8	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSB202-10	RC-3	.35
RCSMS204-12	3/4	2 17/32	1	1 9/16	1 27/64	1 7/32	1 1/4	CSB204-12	RC-4	.48
RCSMS205-14	7/8	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSB205-14	RC-5	.53
RCSMS205-15	15/16	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSB205-15	RC-5	.53
RCSMS205-16	1	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSB205-16	RC-5	.53

Unit No.	Shaft	Dimensions (Inch)						Bearing	Rubber	Weight
Locking collar Type	Dia.	A	B	C	D	E	K	No.	Ring No.	lbs.
RCSM201-8	1/2	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSA201-8	RC-3	.44
RCSM202-10	5/8	2 17/32	1	1 3/8	1 3/8	1 9/64	1 1/8	CSA202-10	RC-3	.44
RCSM204-12	3/4	2 17/32	1	1 9/16	1 27/64	1 7/32	1 1/4	CSA204-12	RC-4	.52
RCSM205-14	7/8	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSA205-14	RC-5	.58
RCSM205-15	15/16	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSA205-15	RC-5	.58
RCSM205-16	1	2 17/32	1	1 25/32	1 27/64	1 9/32	1 1/2	CSA205-16	RC-5	.58