

4 - Bolt Flange Blocks - Setscrew Locking

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCF	Wide	Square	Standard	1/2 - 3	12 - 75	26
UCFS	Wide	Square	Standard	1/2 - 2 7/16	12 - 60	27
UCFX	Wide	Square	Medium	7/8 - 3	-	28
SBF	Narrow	Square	Standard	1/2 - 1 1/2	-	29
SBFS	Narrow	Square	Light	3/4 - 1 1/2	-	30
SBFN	Narrow	Square	Light	1/2 - 1 3/4	-	31
UCFC	Wide	Round Cartridge	Standard	1/2 - 2 1/2	-	32

4 - Bolt Flange Blocks - Eccentric Locking Collar

Series	Bearing Inner Ring	Housing	Housing Duty	Shaft Diameter		Page
				Inch	MM	
HCFS	Wide	Square	Standard	3/4 - 2 7/16	20- 60	33
SAF	Narrow	Square	Standard	1/2 - 1 1/2	-	34
SAFS	Narrow	Square	Standard	3/4 - 1 1/2	-	35
SAFN	Narrow	Square	Light	1/2 - 1 3/4	-	36

3 - Bolt Flange Blocks - Ductile Iron Housing

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
SBFCT	Narrow	Set Screw	Light	1/2 - 1 7/16	-	37
SAFCT	Narrow	Eccentric Collar	Light	1/2 - 1 7/16	-	38

Screw Conveyor Hanger Unit

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCSH	Wide	Set Screw	Threaded Base	1/2 - 2	-	39

Take- Up Units - Wide Slot

Series	Bearing Inner Ring	Locking type	Housing Duty	Shaft Diameter		Page
				Inch	MM	
UCST	Wide	Set Screw	Standard	1/2 - 2 1/2	12 - 65	40
HCST	Wide	Eccentric Collar	Standard	1/2 - 2 7/16	20 - 60	41


Rubber Mounted - Cylindrical Cartridge

Series	Bearing Inner Ring	Locking type	Housing	Shaft Diameter		Page
				Inch	MM	
RCSMS	Narrow	Set Screw	Rubber Grommet	1/2 - 1	-	42
RCSM	Narrow	Eccentric Collar	Rubber Grommet	1/2 - 1	-	42

Rubber Mounted - Spherical Cartridge

Series	Bearing Inner Ring	Locking type	Housing	Shaft Diameter		Page
				Inch	MM	
SBR	Narrow	Set Screw	Rubber Grommet	1/2 - 1 1/4	-	43
SAR	Narrow	Eccentric Collar	Rubber Grommet	1/2 - 1 1/4	-	43

SBR - Narrow Inner Ring Bearing* Set Screw Locking
 SAR - Narrow Inner Ring Bearing * Eccentric Locking Collar
 Spherical OD Rubber Cartridge

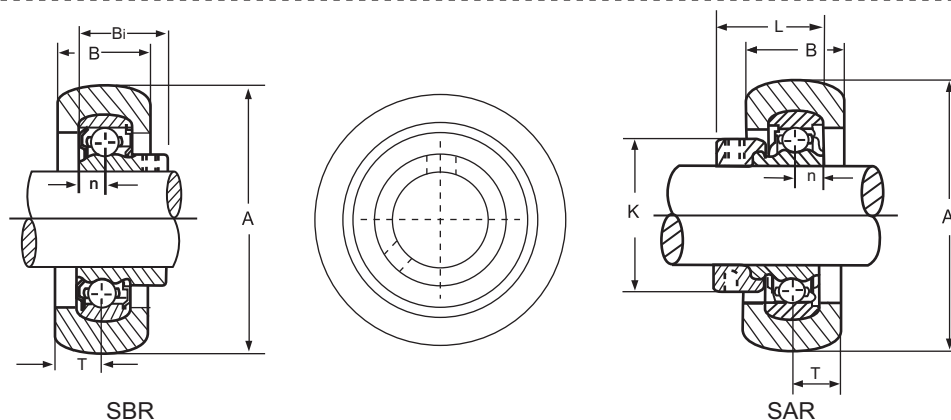

Unit No.	Shaft Dia. Inch.	Dimensions (Inch)						Bearing No.	Rubber Ring No.	Weight lbs.
		A		B	Bi	n	T			
		mm	fraction							
SBR201-8	1/2	47.6	1 7/8	11/16	0.8661	0.2362	11/32	SB201-8	R-4	0.24
SBR202-10	5/8							SB202-10		
SBR204-12	3/4	52.4	2 1/16	11/16	0.9843	0.2756	11/32	SB204-12	R-5	0.35
SBR205-14	7/8	62.4	2 29/64	25/32	1.0630	0.2953	13/32	SB205-14	R-6	0.42
SBR205-15	15/16							SB205-15		
SBR205-16	1							SB205-16		
SBR206-17	1 1/16	72.4	2 27/32	13/16	1.1811	0.3150	13/32	SB206-17	R-7	0.97
SBR206-18	1 1/8							SB206-18		
SBR206-19	1 3/16							SB206-19		
SBR206-20	1 1/4							SB206-20		

Unit No.	Shaft Dia. Inch.	Dimensions (Inch)							Bearing No.	Rubber Ring No.	Weight lbs.
		A		B	L	N	T	K			
		mm	fraction								
SAR201-8	1/2	47.6	1 7/8	11/16	1.1260	0.2362	11/32	1 1/8	SA201-8	R-4	0.35
SAR202-10	5/8								SA202-10		
SAR204-12	3/4	52.4	2 1/16	11/16	1.2205	0.2756	11/32	1 1/4	SA204-12	R-5	0.37
SAR205-14	7/8								SA205-14		
SAR205-15	15/16	62.4	2 29/64	25/32	1.2205	0.2953	13/32	1 1/2	SA205-15	R-6	0.49
SAR205-16	1								SA205-16		
SAR206-17	1 1/16								SA206-17		
SAR206-18	1 1/8								SA206-18		
SAR206-19	1 3/16	72.4	2 27/32	13/16	1.4065	0.3150	13/32	1 3/4	SA206-19	R-7	0.79
SAR206-20	1 1/4								SA206-20		