


**(HTD®) TIMING PULLEY Stock - 8MM PITCH**

**ALUMINUM / STEEL**

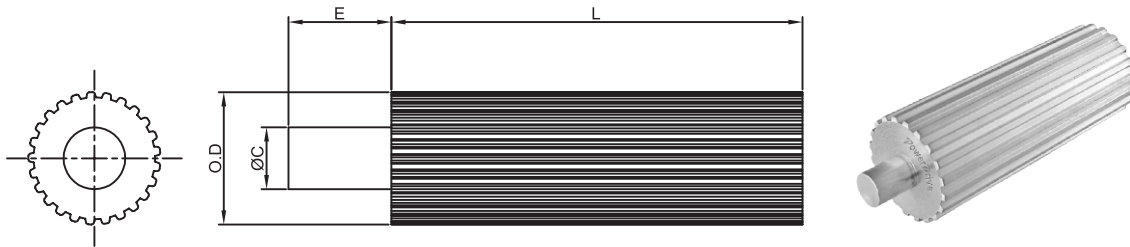

(HTD®) Timing Pulley Stock - 8MM Pitch							
ALUMINUM PART NUMBER	STEEL PART NUMBER	NO. OF TEETH/ GROOVES	P.D.	O.D.	MINIMUM USABLE LENGTH L (In Inch)	C Shank Diameter	Shank Length (In Inch)
20-8M-PS10A	20-8M-PS10S	20	2.005	1.951	10	0.75	1
21-8M-PS10A	21-8M-PS10S	21	2.105	2.051	10	0.75	1
22-8M-PS10A	22-8M-PS10S	22	2.206	2.152	10	0.75	1
23-8M-PS10A	23-8M-PS10S	23	2.306	2.252	10	0.75	1
24-8M-PS10A	24-8M-PS10S	24	2.406	2.352	10	1.00	1
25-8M-PS10A	25-8M-PS10S	25	2.506	2.452	10	1.00	1
26-8M-PS10A	26-8M-PS10S	26	2.607	2.553	10	1.00	1
28-8M-PS10A	28-8M-PS10S	28	2.807	2.759	10	1.00	1
30-8M-PS10A	30-8M-PS10S	30	3.008	2.958	10	1.00	1
32-8M-PS10A	32-8M-PS10S	32	3.208	3.156	10	1.00	1
34-8M-PS10A	34-8M-PS10S	34	3.409	3.355	10	1.00	1
35-8M-PS10A	35-8M-PS10S	35	3.509	3.455	10	1.00	1
36-8M-PS10A	36-8M-PS10S	36	3.609	3.555	10	1.00	1
38-8M-PS10A	38-8M-PS10S	38	3.810	3.756	10	1.00	1
40-8M-PS10A	40-8M-PS10S	40	4.010	3.956	10	1.00	1
42-8M-PS10A	42-8M-PS10S	42	4.211	4.157	10	1.00	1
44-8M-PS10A	44-8M-PS10S	44	4.411	4.357	10	1.00	1
45-8M-PS10A	45-8M-PS10S	45	4.511	4.457	10	1.00	1
48-8M-PS10A	48-8M-PS10S	48	4.812	4.758	10	1.00	1
49-8M-PS10A	49-8M-PS10S	49	4.912	4.858	10	1.00	1
50-8M-PS10A	50-8M-PS10S	50	5.013	4.959	10	1.00	1
56-8M-PS10A	56-8M-PS10S	56	5.614	5.56	10	1.00	1
60-8M-PS10A	60-8M-PS10S	60	6.015	5.961	10	1.00	1
62-8M-PS10A	62-8M-PS10S	62	6.216	6.162	10	1.00	1
64-8M-PS10A	64-8M-PS10S	64	6.416	6.362	10	1.00	1
65-8M-PS10A	65-8M-PS10S	65	6.517	6.463	10	1.00	1
70-8M-PS10A	70-8M-PS10S	70	7.018	6.964	10	1.00	1
72-8M-PS10A	72-8M-PS10S	72	7.218	7.164	10	1.00	1
75-8M-PS10A	75-8M-PS10S	75	7.519	7.465	10	1.00	1
80-8M-PS10A	80-8M-PS10S	80	8.020	7.966	10	1.00	1

**Note :** Shank may or may not be available in some cases.