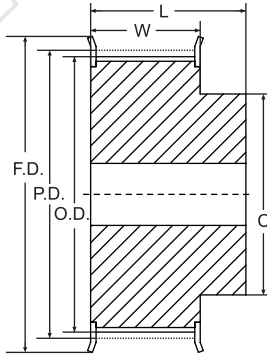



TIMING BELT PULLEY T10MM PITCH (TRAPEZOIDAL TEETH)
**ALUMINUM
CLEAR ANODIZED**
FOR 16MM, 25MM WIDE BELTS

TYPE - 6F

TYPE - 6


Note : All Dimensions are in MM


10mm PITCH (T) 16mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
31 T10/12-2	12	6F	38.20	36.35	42	28	6	8	31	21	10	0.03
31 T10/14-2	14	6F	44.56	42.70	48	32	8	10	31	21	10	0.04
31 T10/15-2	15	6F	47.75	45.90	51	32	8	10	31	21	10	0.05
31 T10/16-2	16	6F	50.93	49.10	55	35	8	10	31	21	10	0.05
31 T10/18-2	18	6F	57.29	55.45	61	40	8	12	31	21	10	0.07
31 T10/19-2	19	6F	60.48	58.65	64	44	8	12	31	21	10	0.08
31 T10/20-2	20	6F	63.66	61.80	67	46	8	12	31	21	10	0.09
31 T10/24-2	24	6F	76.39	74.55	80	58	8	12	31	21	10	0.13
31 T10/25-2	25	6F	79.58	77.75	82	60	8	12	31	21	10	0.14
31 T10/27-2	27	6F	85.95	84.10	90	60	8	12	31	21	10	0.16
31 T10/30-2	30	6F	95.49	93.65	99	60	8	12	31	21	10	0.20
31 T10/32-2	32	6F	101.86	100.00	105	65	10	16	31	21	10	0.22
31 T10/36-2	36	6F	114.59	112.75	118	70	10	16	31	21	10	0.28
31 T10/40-2	40	6F	127.32	125.45	131	80	10	16	31	21	10	0.34
31 T10/48-0	48	6	152.78	150.95	-	95	16	20	31	21	10	0.49
31 T10/60-0	60	6	190.98	189.15	-	110	16	20	31	21	10	0.77

10mm PITCH (T) 25mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
40 T10/12-2	12	6F	38.20	36.35	42	28	6	8	40	30	10	0.03
40 T10/14-2	14	6F	44.56	42.70	48	32	8	10	40	30	10	0.04
40 T10/15-2	15	6F	47.75	45.90	51	32	8	10	40	30	10	0.05
40 T10/16-2	16	6F	50.93	49.10	55	35	8	10	40	30	10	0.05
40 T10/18-2	18	6F	57.29	55.45	61	40	8	12	40	30	10	0.07
40 T10/19-2	19	6F	60.48	58.65	64	44	8	12	40	30	10	0.08
40 T10/20-2	20	6F	63.66	61.80	67	46	8	12	40	30	10	0.09
40 T10/24-2	24	6F	76.39	74.55	80	58	8	12	40	30	10	0.13
40 T10/25-2	25	6F	79.58	77.75	82	60	8	12	40	30	10	0.14
40 T10/27-2	27	6F	85.95	84.10	90	60	8	12	40	30	10	0.16
40 T10/30-2	30	6F	95.49	93.65	99	60	8	12	40	30	10	0.20
40 T10/32-2	32	6F	101.86	100.00	105	65	10	16	40	30	10	0.22
40 T10/36-2	36	6F	114.59	112.75	118	70	10	16	40	30	10	0.28
40 T10/40-2	40	6F	127.32	125.45	131	80	10	16	40	30	10	0.34
40 T10/48-0	48	6	152.78	150.95	-	95	16	20	40	30	10	0.48
40 T10/60-0	60	6	190.98	189.15	-	110	16	20	40	30	10	0.76


Note : Part number listed are for Stock bore

Rework services are available to accommodate Max Bore Size

Drill & Tap Set Screw holes as per request.

TIMING BELT PULLEY T10MM PITCH (TRAPEZOIDAL TEETH)
**ALUMINUM
CLEAR ANODIZED**
FOR 32MM, 50MM WIDE BELTS


TYPE - 6F



TYPE - 6



Note : All Dimensions are in MM

10mm PITCH (T) 32mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
50 T10/18-2	18	6F	57.29	55.45	61	40	10	12	50	40	10	0.06
50 T10/19-2	19	6F	60.48	58.65	64	44	10	12	50	40	10	0.07
50 T10/20-2	20	6F	63.66	61.80	67	46	12	16	50	40	10	0.08
50 T10/24-2	24	6F	76.39	74.55	80	58	12	16	50	40	10	0.12
50 T10/25-2	25	6F	79.58	77.75	82	60	12	16	50	40	10	0.13
50 T10/27-2	27	6F	85.95	84.10	90	60	12	16	50	40	10	0.15
50 T10/30-2	30	6F	95.49	93.65	99	60	12	16	50	40	10	0.18
50 T10/32-2	32	6F	101.86	100.00	105	65	12	16	50	40	10	0.21
50 T10/36-2	36	6F	114.59	112.75	118	70	16	20	50	40	10	0.26
50 T10/40-2	40	6F	127.32	125.45	131	80	16	20	50	40	10	0.32
50 T10/48-0	48	6	152.78	150.95	-	95	16	20	50	40	10	0.48
50 T10/60-0	60	6	190.98	189.15	-	110	16	20	50	40	10	0.76

10mm PITCH (T) 50mm WIDE BELTS												
PART NUMBER	NO. OF TEETH	TYPE	DIAMETERS				STOCK BORES		DIMENSIONS		HUB PROJ.	WEIGHT (lbs.)
			P.D.	O.D.	F.D.	HUB	MIN.	MAX.	L	W		
66 T10/18-2	18	6F	57.29	55.45	61	40	10	12	66	56	10	0.06
66 T10/19-2	19	6F	60.48	58.65	64	44	10	12	66	56	10	0.07
66 T10/20-2	20	6F	63.66	61.80	67	46	12	16	66	56	10	0.07
66 T10/24-2	24	6F	76.39	74.55	80	58	12	16	66	56	10	0.11
66 T10/25-2	25	6F	79.58	77.75	82	60	12	16	66	56	10	0.12
66 T10/27-2	27	6F	85.95	84.10	90	60	12	16	66	56	10	0.14
66 T10/30-2	30	6F	95.49	93.65	99	60	12	16	66	56	10	0.18
66 T10/32-2	32	6F	101.86	100.00	105	65	12	16	66	56	10	0.21
66 T10/36-2	36	6F	114.59	112.75	118	70	16	20	66	56	10	0.25
66 T10/40-2	40	6F	127.32	125.45	131	80	16	20	66	56	10	0.32
66 T10/48-0	48	6	152.78	150.95	-	95	16	20	66	56	10	0.47
66 T10/60-0	60	6	190.98	189.15	-	110	16	20	66	56	10	0.75

Note : Part number listed are for Stock bore

Rework services are available to accommodate Max Bore Size

Drill & Tap Set Screw holes as per request.